


A detailed line drawing of a pressure washer engine and wheels. The Simpson logo is prominently displayed in the upper center, overlaid on the engine housing. The engine has a Honda GX label on its side. The wheels are large and have a deep tread pattern.

**SIMPSON®**

Driven By **PERFORMANCE™**

## FEATURED PRODUCTS **CATALOG**

PRESSURE WASHERS | GENERATORS | INVERTER GENERATORS | MOBILE WASH TRAILER SYSTEMS | HOSES | ACCESSORIES

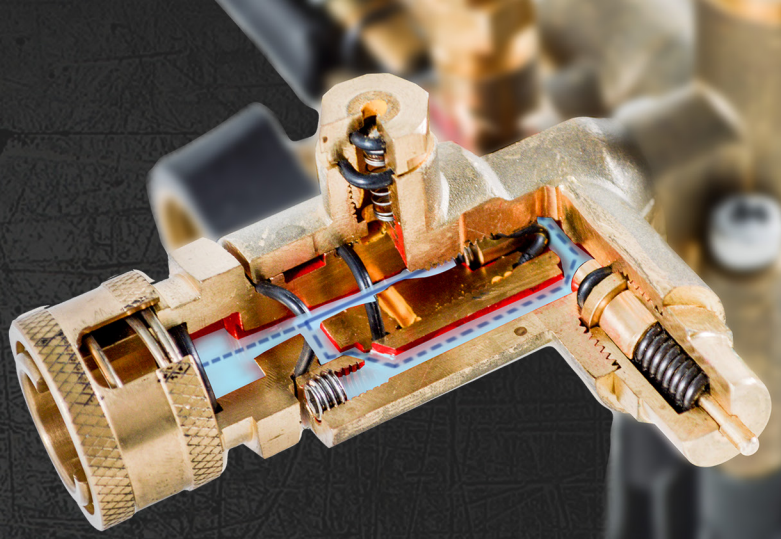

MANY OF OUR PRODUCTS ARE EQUIPPED WITH

# POWERBOOST®

PROVIDES HIGHER PRESSURE AT THE NOZZLE RESULTING IN GREATER IMPACT AND CLEANING PERFORMANCE.




POWERBOOST® TECHNOLOGY OPERATED IN HIGH PRESSURE TRIGGERS A BYPASS AROUND THE VENTURI NOZZLE TO REDUCE PRESSURE LOSS.



REDUCES VIBRATION AND HEAT TO HELP EXTEND ENGINE AND PUMP LIFE.



♦ - Indicates pump equipped with PowerBoost®

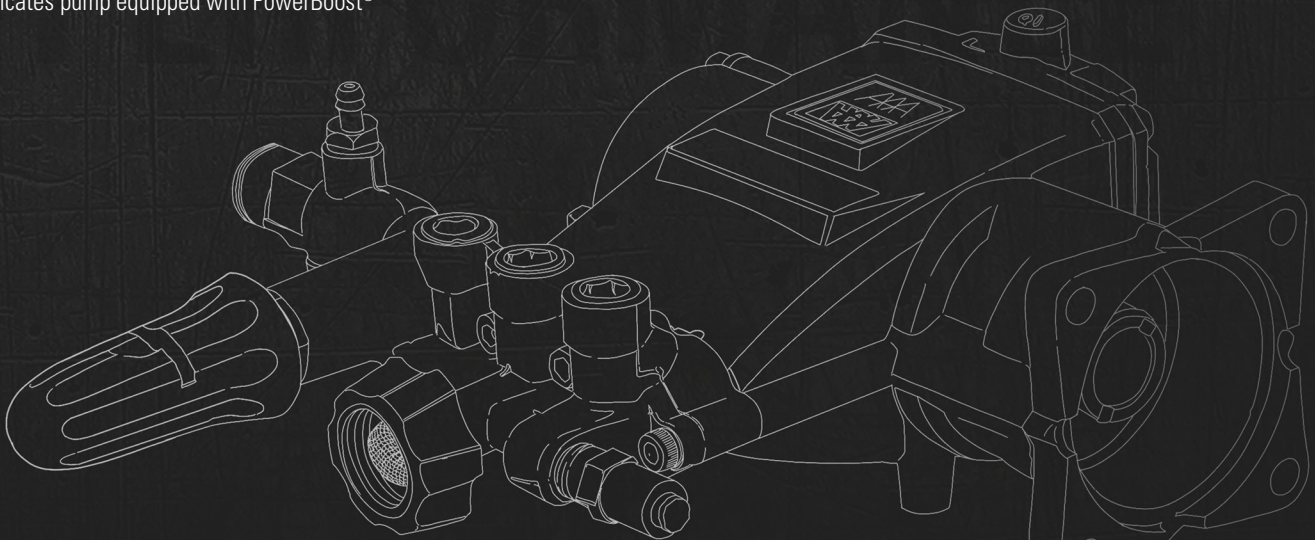

# RESIDENTIAL

SIMPSON® outdoor power equipment is engineered with innovation, quality, and performance at the forefront. SIMPSON's wide range of products allow for homeowners and pros to find the equipment best suiting their needs.



Driven By **PERFORMANCE™**



## CLEAN MACHINE®



### LIMITED WARRANTY



**CM60912(-S)**



**CM60976(-S)**



| PART#          | 60912 (60972)                 |
|----------------|-------------------------------|
| WATER PRESSURE | 2400 PSI                      |
| FLOW RATE      | 2.0 GPM                       |
| ENGINE         | SIMPSON® 149CC                |
| PUMP           | OEM Technologies™ Axial Cam   |
| HOSE FITTINGS  | M22                           |
| HOSE           | 1/4" x 25' High Pressure Hose |
| WHEELS         | 6" Never-flats                |

Includes on-board soap tank

| PART#          | 60976 (61016)                 |
|----------------|-------------------------------|
| WATER PRESSURE | 2300 PSI                      |
| FLOW RATE      | 1.2 GPM                       |
| ENGINE         | 120V-60Hz Motor               |
| PUMP           | OEM Technologies™ Axial Cam   |
| HOSE FITTINGS  | M22                           |
| HOSE           | 1/4" x 25' High Pressure Hose |
| WHEELS         | 10" Never-flats               |

Includes on-board soap tank

## MEGASHOT™ SERIES



### LIMITED WARRANTY



**MS60773(-S)**



**MS60809-S**



**MS60805-S**



**MSV3024-I**



| PART#          | 60773 (60784)               |
|----------------|-----------------------------|
| WATER PRESSURE | 2800 PSI                    |
| FLOW RATE      | 2.3 GPM                     |
| ENGINE         | HONDA® GCV160               |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 12" Never-flat              |

Includes Dial-N-Wash®

| PART#          | 60809                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3000 PSI                    |
| FLOW RATE      | 2.4 GPM                     |
| ENGINE         | HONDA® GCV160               |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 12" Never-flat              |

Includes Dial-N-Wash®

| PART#          | 60808                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3000 PSI                    |
| FLOW RATE      | 2.4 GPM                     |
| ENGINE         | HONDA® GCV160               |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 12" Never-flat              |

Includes 15" surface scrubber

| PART#          | 60706                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3000 PSI                    |
| FLOW RATE      | 2.4 GPM                     |
| ENGINE         | HONDA® GCV190               |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 12" Never-flat              |

Includes Automatic Throttle Control

**MS60763-S**



**MSH3125-S**



**MS31025HT**



**MS61033-S**



| PART#          | 60763                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3100 PSI                    |
| FLOW RATE      | 2.4 GPM                     |
| ENGINE         | KOHLER® RH265               |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 12" Never-flat              |

| PART#          | 60551                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3200 PSI                    |
| FLOW RATE      | 2.5 GPM                     |
| ENGINE         | HONDA® GC190                |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 10" Premium                 |

| PART#          | 60652                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3200 PSI                    |
| FLOW RATE      | 2.5 GPM                     |
| ENGINE         | HONDA® GC190                |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 10" Premium                 |

| PART#          | 61033                       |
|----------------|-----------------------------|
| WATER PRESSURE | 3300 PSI                    |
| FLOW RATE      | 2.4 GPM                     |
| ENGINE         | HONDA® GC190                |
| PUMP           | OEM Technologies™ Axial Cam |
| HOSE           | 1/4" x 25', M22, MorFlex®   |
| WHEELS         | 10" Premium                 |

Includes 15" surface scrubber

**1-S/(-S) - Indicates shippable packaging**



WITH FOREIGN AND DOMESTIC COMPONENTS



Driven By **PERFORMANCE™**



# PROFESSIONAL

## POWERSHOT™ SERIES

LIMITED WARRANTY



AAA™ AX300 Axial



### PART #

|                |
|----------------|
| WATER PRESSURE |
| FLOW RATE      |
| ENGINE         |
| PUMP           |
| HOSE           |
| TIRES          |

### PS3228-S



#### ◆ 60629

|                            |
|----------------------------|
| 3300 PSI                   |
| 2.5 GPM                    |
| HONDA® GX200               |
| AAA™ Industrial Triplex    |
| 5/16" x 25', M22, MorFlex® |
| 10" Premium                |

### PS61002(-S)



#### 61002 (61014)

|                            |
|----------------------------|
| 3500 PSI                   |
| 2.5 GPM                    |
| HONDA® GX200               |
| AAA™ AX300 Axial           |
| 5/16" x 25', M22, MorFlex® |
| 10" Premium                |

### PS3835



#### ◆ 60579

|                               |
|-------------------------------|
| 3800 PSI                      |
| 3.5 GPM                       |
| HONDA® GX270                  |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

### PS60869



#### ◆ 60869

|                               |
|-------------------------------|
| 4000 PSI                      |
| 3.5 GPM                       |
| HONDA® GX270                  |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

### PS4240



#### 60456

|                               |
|-------------------------------|
| 4200 PSI                      |
| 4.0 GPM                       |
| HONDA® GX390                  |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

### PS60843



#### 60843

|                               |
|-------------------------------|
| 4400 PSI                      |
| 4.0 GPM                       |
| SIMPSON® 420cc                |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

## ALUMINUM SERIES

LIMITED WARRANTY



KOHLER® SH



HONDA® & KOHLER® CH



AAA™ Triplex



CAT PUMPS®



### PART #

|                |
|----------------|
| WATER PRESSURE |
| FLOW RATE      |
| ENGINE         |
| PUMP           |
| HOSE           |
| TIRES          |

### ALH3225(-S)



#### ◆ 60686(60774)

|                            |
|----------------------------|
| 3200 PSI                   |
| 2.5 GPM                    |
| KOHLER® SH265              |
| AAA™ Industrial Triplex    |
| 5/16" x 35', M22, MorFlex® |
| 10" Premium                |

### ALH3228-S



#### 60735

|                                |
|--------------------------------|
| 3400 PSI                       |
| 2.5 GPM                        |
| HONDA® GX200                   |
| CAT PUMPS® Industrial Triplex  |
| 5/16" x 25', QC, Steel-braided |
| 10" Premium                    |

### ALK3228-S



#### ◆ 60820

|                            |
|----------------------------|
| 3600 PSI                   |
| 2.5 GPM                    |
| KOHLER® CH270              |
| AAA™ Industrial Triplex    |
| 5/16" x 25', M22, MorFlex® |
| 10" Premium                |

### ALH3425-S



#### ◆ 60689

|                            |
|----------------------------|
| 3600 PSI                   |
| 2.5 GPM                    |
| HONDA® GX200               |
| AAA™ Industrial Triplex    |
| 5/16" x 35', M22, MorFlex® |
| 10" Premium                |

### ALH4240



#### 60688

|                               |
|-------------------------------|
| 4200 PSI                      |
| 4.0 GPM                       |
| HONDA® GX390                  |
| CAT PUMPS® Industrial Triplex |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

### ALK60891



#### 60891

|                               |
|-------------------------------|
| 4400 PSI                      |
| 4.0 GPM                       |
| KOHLER® CH440                 |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

²(-S) - Indicates shippable packaging

◆ - Indicates pump equipped with PowerBoost®

## WATER BLASTER SERIES

LIMITED WARRANTY



| PART #         |
|----------------|
| WATER PRESSURE |
| FLOW RATE      |
| ENGINE         |
| PUMP           |
| HOSE           |
| TIRES          |



| 60205                         |
|-------------------------------|
| 4200 PSI                      |
| 4.0 GPM                       |
| HONDA® GX390                  |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |



| 60824                         |
|-------------------------------|
| 4400 PSI                      |
| 4.0 GPM                       |
| SIMPSON® 420cc                |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |



Driven By **PERFORMANCE™**



## ALUMINUM WATER BLASTER SERIES

LIMITED WARRANTY



| PART #         |
|----------------|
| WATER PRESSURE |
| FLOW RATE      |
| ENGINE         |
| PUMP           |
| HOSE           |
| TIRES          |



| 60827                         |
|-------------------------------|
| 4200 PSI                      |
| 4.0 GPM                       |
| HONDA® GX390                  |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |



| 60828                         |
|-------------------------------|
| 4200 PSI                      |
| 4.0 GPM                       |
| HONDA® GX390                  |
| CAT PUMPS™ Industrial Triplex |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |



| 60825                         |
|-------------------------------|
| 4400 PSI                      |
| 4.0 GPM                       |
| SIMPSON® 420cc                |
| AAA™ Industrial Triplex       |
| 3/8" x 50', QC, Steel-braided |
| 13" Premium                   |

## WATER SHOTGUN® SERIES

LIMITED WARRANTY



| PART #         |
|----------------|
| WATER PRESSURE |
| FLOW RATE      |
| ENGINE         |
| PUMP           |
| HOSE           |
| TIRES          |



| 60242                         |
|-------------------------------|
| 4000 PSI                      |
| 5.0 GPM                       |
| VANGUARD® V-Twin              |
| COMET Premium Series Pump     |
| 3/8" x 50', QC, Steel-braided |
| 13" Aluminum Wheels           |



| 60243                         |
|-------------------------------|
| 5000 PSI                      |
| 5.0 GPM                       |
| HONDA® GX630                  |
| COMET Premium Series Pump     |
| 3/8" x 50', QC, Steel-braided |
| 13" Aluminum Wheels           |

## BRUTE SERIES

LIMITED WARRANTY



**MINI BRUTE¹**

| MB1518 / 60363          |
|-------------------------|
| 1500 PSI                |
| 1.8 GPM                 |
| 120 V/ 60 Hz Motor      |
| Industrial Triplex Pump |
| Fuel Tank N/A           |
| 4.0 gal Diesel Tank     |
| Direct Drive            |
| 13" Premium Tires       |



**KING BRUTE**

| KB3028 / 65100               |
|------------------------------|
| 3000 PSI                     |
| 2.8 GPM                      |
| BRIGGS & STRATTON® OHV 1100  |
| CAT PUMP® Industrial Triplex |
| 7.3 gal Fuel Tank            |
| 5.0 gal Diesel Tank          |
| Direct Drive                 |
| 13" Premium Tires            |



**BIG BRUTE²**

| BB65106 / 65106               |
|-------------------------------|
| 4000 PSI                      |
| 4.0 GPM                       |
| HONDA® GX390 Engine           |
| COMET Industrial Triplex Pump |
| 6.0 gal Fuel Tank             |
| 11 gal Diesel Tank            |
| Direct Drive                  |
| 10" Premium Tires             |

| BB65105 / 65105               |
|-------------------------------|
| 4000 PSI                      |
| 4.0 GPM                       |
| VANGUARD® 479cc Engine        |
| COMET Industrial Triplex Pump |
| 6.0 gal Fuel Tank             |
| 11 gal Diesel Tank            |
| Direct Drive                  |
| 10" Premium Tires             |



**SUPER BRUTE²³**

| BB65108 / 65108               |
|-------------------------------|
| 4000 PSI                      |
| 4.0 GPM                       |
| VANGUARD® 479cc Engine        |
| COMET Industrial Triplex Pump |
| 6.0 gal Fuel Tank             |
| 11 gal Diesel Tank            |
| Gear Drive                    |
| 10" Premium Tires             |

| SB3555 / 65110            |
|---------------------------|
| 3500 PSI                  |
| 5.5 GPM                   |
| VANGUARD® 570cc Engine    |
| COMET Premium Series Pump |
| 10 gal Fuel Tank          |
| 10 gal Diesel Tank        |
| Belt Drive                |

¹ MINI BRUTE includes a 15 amp high limit switch and 35' GFCI cord; not pictured

² Battery NOT included

³ Optional float tank available on SUPER BRUTE

# INDUSTRIAL



BUILT FOR THE  
**TOUGH JOBS**

## SUPER PRO ROLL CAGE SERIES

GAS POWERED



LIMITED WARRANTY

**3YR**  
COMMERCIAL  
ENGINE

**5YR**  
COMMERCIAL  
PUMP

**10YR**  
COMMERCIAL  
FRAME



65200 shown with  
mounted hose reel.  
(Sold separately)

| PART# | MODEL#     | PRESSURE: | FLOW RATE: | DRIVE: | ENGINE:                | PUMP:                   | TIRES:      | SIZE:  |
|-------|------------|-----------|------------|--------|------------------------|-------------------------|-------------|--------|
| 65200 | SW3625HADS | 3600 PSI  | 2.5 GPM    | Direct | HONDA® GX200           | AAA™ Industrial Triplex | 10" Premium | SMALL  |
| 65201 | SW3625KADS | 3600 PSI  | 2.5 GPM    | Direct | KOHLER® CH270          | AAA™ Industrial Triplex | 10" Premium | SMALL  |
| 65202 | SW3625SADS | 3600 PSI  | 2.5 GPM    | Direct | SIMPSON® 208cc         | AAA™ Industrial Triplex | 10" Premium | SMALL  |
| 65203 | SW4035HADM | 4000 PSI  | 3.5 GPM    | Direct | HONDA® GX270           | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65204 | SW4035KADM | 4000 PSI  | 3.5 GPM    | Direct | KOHLER® CH395          | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65206 | SW4440HCDM | 4400 PSI  | 4.0 GPM    | Direct | HONDA® GX390           | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65207 | SW4440KCDM | 4400 PSI  | 4.0 GPM    | Direct | KOHLER® CH440          | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65208 | SW4440SCDM | 4400 PSI  | 4.0 GPM    | Direct | SIMPSON® 420cc         | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65209 | SW4440HCBM | 4400 PSI  | 4.0 GPM    | Belt   | HONDA® GX390           | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65210 | SW4440KCBM | 4400 PSI  | 4.0 GPM    | Belt   | KOHLER® CH440          | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65211 | SW4440SCBM | 4400 PSI  | 4.0 GPM    | Belt   | SIMPSON® 420cc         | AAA™ Industrial Triplex | 10" Premium | MEDIUM |
| 65212 | SW4050VCGI | 4000 PSI  | 5.0 GPM    | Gear   | VANGUARD® V-Twin 570cc | COMET Premium Series    | 13" Premium | LARGE  |
| 65213 | SW5050HCGI | 5000 PSI  | 5.0 GPM    | Gear   | HONDA® GX690           | COMET Premium Series    | 13" Premium | LARGE  |
| 65214 | SW6050KCGI | 6000 PSI  | 5.0 GPM    | Gear   | KOHLER® CH750          | COMET Premium Series    | 13" Premium | LARGE  |
| 65215 | SW7040KCGI | 7000 PSI  | 4.0 GPM    | Gear   | KOHLER® CH750          | COMET Premium Series    | 13" Premium | LARGE  |

### HOSE REELS (Refer to accessories page for specifications.)

| PART #      | 80399           | 80403           |
|-------------|-----------------|-----------------|
| DESCRIPTION | 100ft Hose Reel | 200ft Hose Reel |

### HOSE REEL INSTALLATION KITS

OPTIONAL REEL INSTALLATION KITS COME WITH ALL JUMPER HOSES & HARDWARE. INSTALLATION KITS MUST BE PURCHASED IN ORDER FOR HOSE REEL TO BE CONNECTED TO UNIT.

| PART #      | 80383                           | 80382                             | 80381                      |
|-------------|---------------------------------|-----------------------------------|----------------------------|
| DESCRIPTION | M/L Roll Cage high pressure kit | Small Roll Cage high pressure kit | Roll Cage low pressure kit |

## CUSTOM

ADDITIONAL HIGH & LOW PRESSURE  
MOUNTABLE HOSE REELS AVAILABLE.  
SOLD SEPERATELY FROM UNIT.

## RELIABLE

BUILT FOR THE TOUGH JOBS WITH HONDA®, KOHLER®,  
VANGUARD®, OR SIMPSON® COMMERCIAL SERIES ENGINES  
WITH LOW OIL SHUTDOWN.

## VERSATILE

THE OPTIONS ARE ENDLESS WITH MODELS SPORTING DIRECT,  
BELT OR GEAR DRIVE PREMIUM AAA® OR COMET PUMPS.



## FORTIFIED

FOUR WHEEL, HEAVY-DUTY CART DESIGN WITH A  
WHEEL LOCKING BRAKE SYSTEM.

## PREMIUM PUMP

REMOTE UNLOADER WITH BYPASS HOSE PROVIDES  
INDUSTRIAL DURABILITY FOR EXTENDED PUMP LIFE.

\*Featured on all Roll Cage models

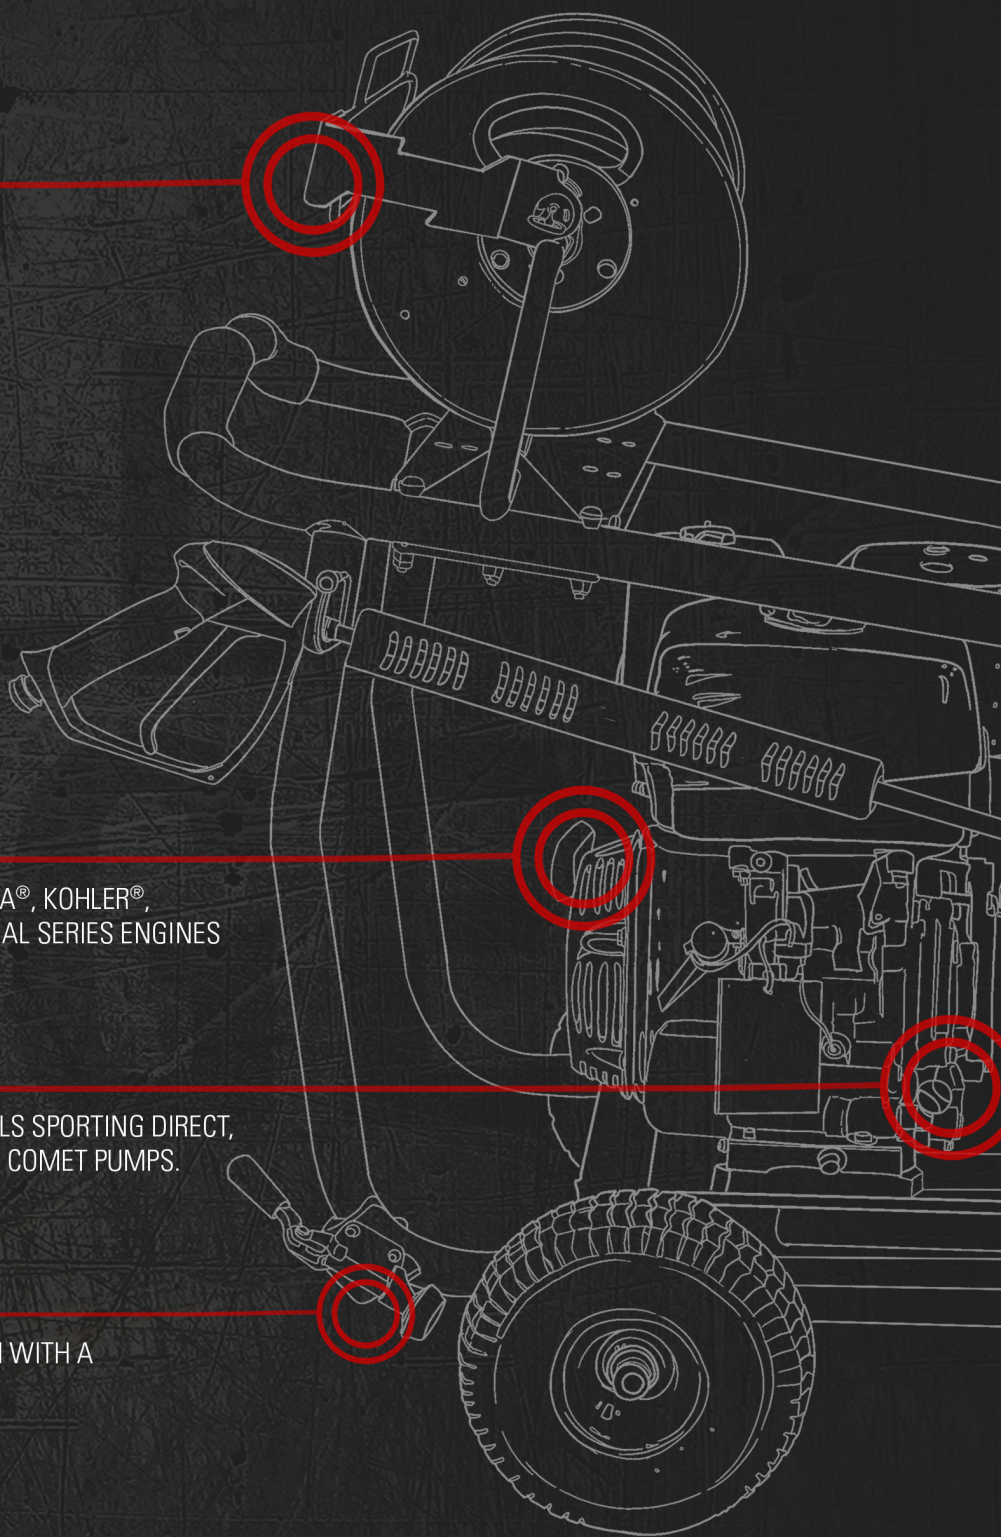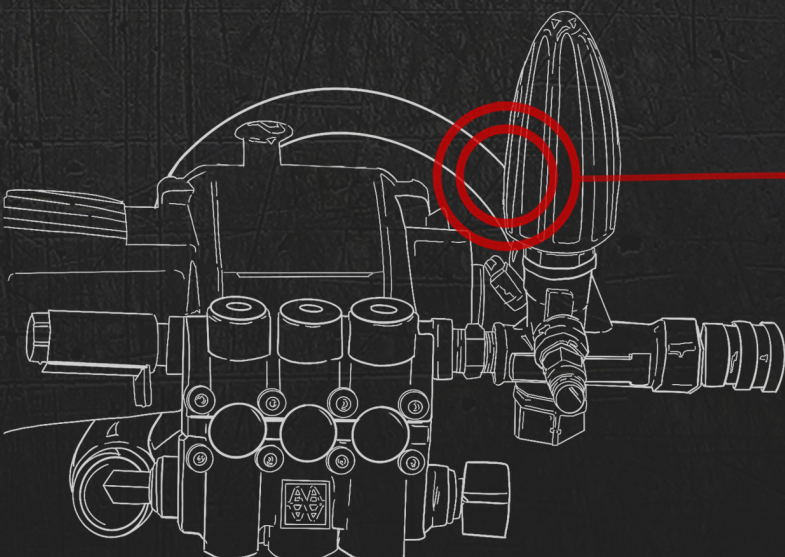

# INDUSTRIAL



BUILT FOR THE  
**TOUGH JOBS**



## INDUSTRIAL SERIES



### LIMITED WARRANTY

**5YR**  
COMMERCIAL  
ENGINE

SIMPSON®

**2YR**  
CONSUMER  
ENGINE

HONDA® GC190

**5YR**  
COMMERCIAL  
ENGINE\*

HONDA® GX SERIES

**7YR**  
COMMERCIAL  
PUMP

AAA™ Industrial  
Triplex and COMET

**3YR**  
COMMERCIAL  
PUMP

AAA™ AX300  
AXIAL

**10YR**  
COMMERCIAL  
FRAME

| PART#   | MODEL#               | PRESSURE: | FLOW RATE: | DRIVE: | ENGINE:        | PUMP:                    | TIRES:      | HOSE:                          |
|---------|----------------------|-----------|------------|--------|----------------|--------------------------|-------------|--------------------------------|
| 61023 ♦ | IR61023 <sup>1</sup> | 2700 PSI  | 2.7 GPM    | Direct | HONDA® GC190   | AAA™ AX300 Axial         | 10" Premium | 5/16" x 50', QC, Steel-braided |
| 61022 ♦ | IR61022 <sup>1</sup> | 3000 PSI  | 2.7 GPM    | Direct | HONDA® GX200   | AAA™ AX300 Axial         | 10" Premium | 5/16" x 50', QC, Steel-braided |
| 61024   | IR61024 <sup>2</sup> | 3000 PSI  | 3.0 GPM    | Direct | HONDA® GX200   | AAA™ Industrial Triplex  | 10" Premium | 3/8" x 50', QC, Steel-braided  |
| 61026   | IR61026 <sup>2</sup> | 3500 PSI  | 4.0 GPM    | Direct | HONDA® GX270   | AAA™ Industrial Triplex  | 13" Premium | 3/8" x 50', QC, Steel-braided  |
| 61028   | IR61028 <sup>2</sup> | 4400 PSI  | 4.0 GPM    | Direct | HONDA® GX390   | AAA™ Industrial Triplex  | 13" Premium | 3/8" x 50', QC, Steel-braided  |
| 61029   | IR61029 <sup>2</sup> | 4400 PSI  | 4.0 GPM    | Direct | SIMPSON® 420cc | AAA™ Industrial Triplex  | 13" Premium | 3/8" x 50', QC, Steel-braided  |
| 61030   | IR61030 <sup>2</sup> | 4200 PSI  | 4.0 GPM    | Belt   | HONDA® GX390   | COMET Industrial Triplex | 13" Premium | 3/8" x 50', QC, Steel-braided  |

♦ - Indicates pump equipped with PowerBoost®


<sup>1</sup> Black welded steel frame, powder coated for corrosion resistance

<sup>2</sup> Ultra lightweight aircraft grade aluminum frame

\*Limited warranty offers 3 year HONDA® commercial engine warranty PLUS additional 2 year engine coverage warranty.

## DURABLE


HOSE IS UP TO 3X MORE ABRASION RESISTANT VS. RUBBER HOSE.

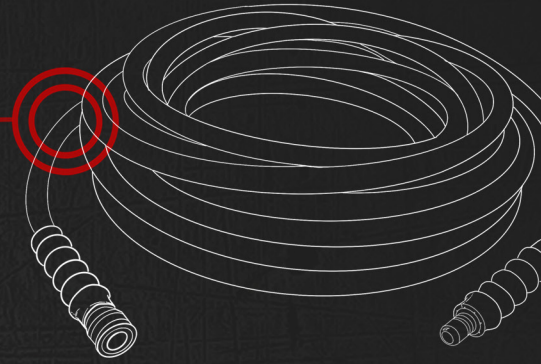

## SIDE ASSIST

PROFESSIONAL SPRAY GUN WITH SIDE ASSIST HELPS PROVIDE CONTROL AND COMFORT FOR LONGER CLEANING TASKS.


\*Featured on select models

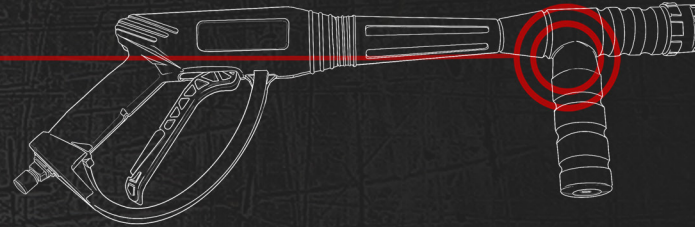

## PREMIUM POWER

GET THE CLEAN YOU NEED WITH POWERFUL HONDA® AND SIMPSON® COMMERCIAL SERIES ENGINES WITH LOW OIL SHUTDOWN.


\*Featured on select models

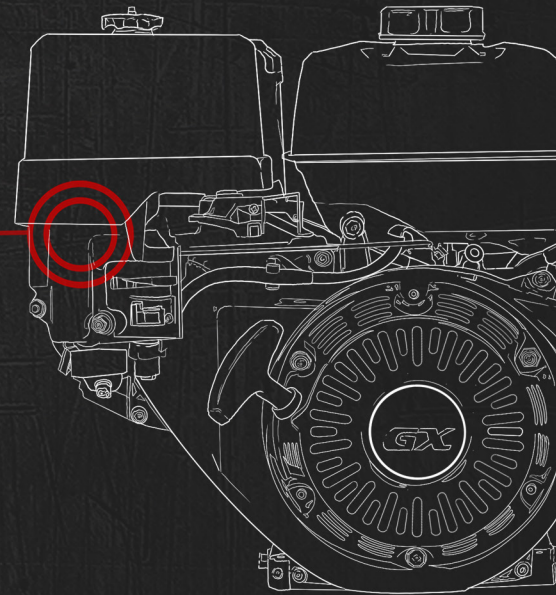

## PREMIUM PUMP

REMOTE UNLOADER WITH BYPASS HOSE PROVIDES INDUSTRIAL DURABILITY FOR EXTENDED PUMP LIFE.

\*Featured on select models

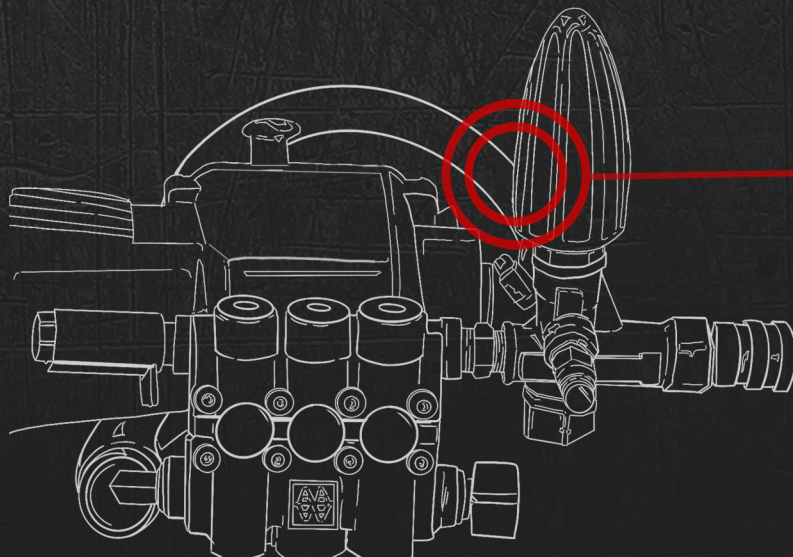

# MOBILE TRAILER SERIES

LIMITED WARRANTY




**3YR**  
COMMERCIAL  
ENGINE

**5YR**  
COMMERCIAL  
PUMP

**2YR**  
COMMERCIAL  
PUMP

COMET PUMPS

CAT PUMPS®

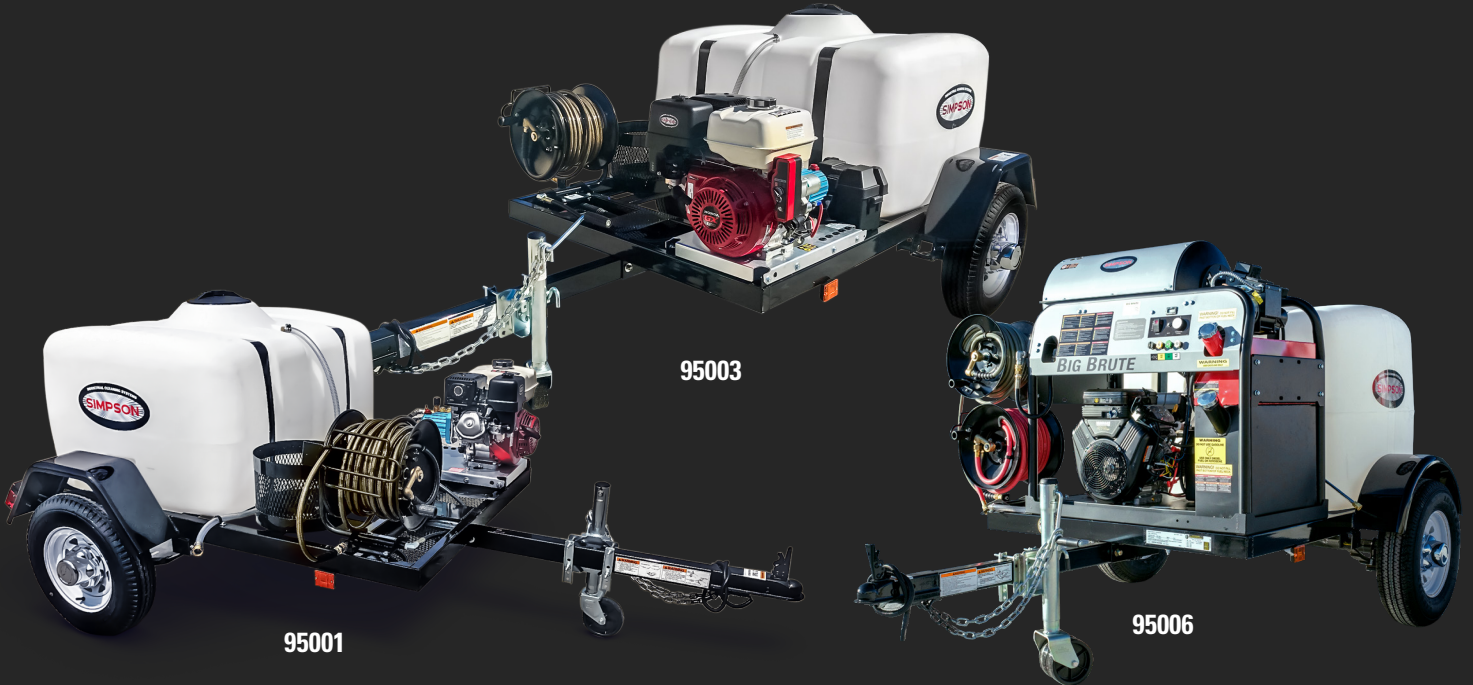

| MODEL #          | STAGE 1A COLD WATER            |                                 | STAGE 1B COLD WATER             |                                    |                                    | STAGE 1C HOT WATER                 |                                    |
|------------------|--------------------------------|---------------------------------|---------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                  | 95000                          | 95001                           | 95002                           | 95003 <sup>1</sup>                 | 95004 <sup>1</sup>                 | 95005 <sup>1</sup>                 | 95006 <sup>1</sup>                 |
| WATER PRESSURE   | 3200 PSI                       | 3800 PSI                        | 4200 PSI                        | 4200 PSI                           | 4200 PSI                           | 4000 PSI                           | 4000 PSI                           |
| FLOW RATE        | 2.8 GPM                        | 3.5 GPM                         | 4.0 GPM                         | 4.0 GPM                            | 4.0 GPM                            | 4.0 GPM                            | 4.0 GPM                            |
| ENGINE           | HONDA® GX200 OHV Engine        | HONDA® GX270 OHV Engine         | HONDA® GX390 OHV Engine         | HONDA® GX390 OHV w/ Electric Start | VANGUARD® V-Twin w/ Electric Start | HONDA® GX390 OHV w/ Electric Start | VANGUARD® V-Twin w/ Electric Start |
| PUMP             | CAT PUMPS®                     | CAT PUMPS®                      | CAT PUMPS®                      | CAT PUMPS®                         | CAT PUMPS®                         | COMET                              | COMET                              |
| TRAILER SIZE     | 7' Overall (4' x 4' Platform)  | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform)    | 9' Overall (4' x 5.5' Platform)    | 9' Overall (4' x 5.5' Platform)    | 9' Overall (4' x 5.5' Platform)    |
| FENDER MATERIAL  | Steel                          | Steel                           | Steel                           | Steel                              | Steel                              | Steel                              | Steel                              |
| AXLE RATING      | 2000 Lbs                       | 2000 Lbs                        | 2000 Lbs                        | 2000 Lbs                           | 2000 Lbs                           | 3500 Lbs                           | 3500 Lbs                           |
| TIRES            | 12" 6-Ply                      | 12" 6-Ply                       | 12" 6-Ply                       | 12" 6-Ply                          | 12" 6-Ply                          | 13" 6-Ply                          | 13" 6-Ply                          |
| DOT LIGHTING     | LED                            | LED                             | LED                             | LED                                | LED                                | LED                                | LED                                |
| COUPLING TYPE    | 2" Ball                        | 2" Ball                         | 2" Ball                         | 2" Ball                            | 2" Ball                            | 2" Ball                            | 2" Ball                            |
| WATER TANK SIZE  | 100 Gal                        | 150 Gal                         | 150 Gal                         | 150 Gal                            | 150 Gal                            | 200 Gal                            | 200 Gal                            |
| HOSE             | 3/8" x 50' Steel-braided w/ QC | 3/8" x 100' Steel-braided w/ QC | 3/8" x 100' Steel-braided w/ QC | 3/8" x 100' Steel-braided w/ QC    | 3/8" x 100' Steel-braided w/ QC    | 3/8" x 100' Armor Hose™ w/ QC      | 3/8" x 100' Armor Hose™ w/ QC      |
| GARDEN HOSE REEL | Optional                       | Optional                        | Optional                        | Optional                           | Optional                           | Standard                           | Standard                           |
| GARDEN HOSE      | Optional 3/4" x 75'            | Optional 3/4" x 75'             | Optional 3/4" x 75'             | Optional 3/4" x 75'                | Optional 3/4" x 75'                | Optional 3/4" x 75'                | Optional 3/4" x 75'                |

<sup>1</sup>External gas tank

<sup>1</sup> Battery NOT included



# INTERESTED IN BECOMING A SIMPSON® DEALER?

Partner with a vertically integrated manufacturer of outdoor power equipment as a SIMPSON dealer and enjoy the following benefits:

- Dedicated Account Representative to help grow your SIMPSON business
- Access to exclusive sales promotions
- Invitations to exclusive DEALER ONLY tradeshow and events
- View our full library of literature including promotional sales material
- Feel secure with a service network of over 1,250 facilities in North America
- Become your own service center, offering the potential for more business



CONTACT YOUR SALES REPRESENTATIVE AT:

**SALES@SIMPSONCLEANING.COM OR CALL 1-847-348-1500**

**Disclaimer of Liability:**

In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information possible. Nevertheless, inadvertent errors in information may occur and information may become dated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in the FNA Group, Inc. catalog. FNA Group, Inc. also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-847-348-1500 with any concerns.



Driven By **PERFORMANCE™**

# INVERTER GENERATOR & PARALLEL KIT

LIMITED WARRANTY

**3YR**  
CONSUMER  
WARRANTY

INVERTER

**90DAY**  
ACCESSORY  
WARRANTY

PARALLEL BOX



## SIG22PK

THE SIG22PK PARALLEL KIT INCLUDES TWO SETS OF POWER LEADS AND GROUNDING WIRES FOR EASY CONNECTIONS BETWEEN TWO SIMPSON SIG2218 INVERTER GENERATORS.

### MODEL #

STARTING WATTS

RUNNING WATTS

VOLTAGE

PHASE

STARTING METHOD

FUEL CAPACITY

RUN TIME

### SIG2218

2200W

1800W

120V AC

Single

Recoil

1.2 gal

8 hrs

Run time with unit at 50% load

Inverter generator and parallel kit sold separately

# POWERSHOT™ GENERATOR SERIES

LIMITED WARRANTY

**3YR**  
COMMERCIAL  
WARRANTY

**6 MONTH**  
CONSUMER  
WARRANTY



## SPG3600

### 70029

3600 Running Watts

4000 Starting Watts

120V AC Voltage

SIMPSON® OHV 212cc Engine

Automatic Voltage Regulation

Recoil Start

3.4 gal Fuel Tank



## SPG3645

### 70005

3600 Running Watts

4500 Starting Watts

120V AC Voltage

SIMPSON® OHV 224cc Engine

Automatic Voltage Regulation

Recoil Start

3.4 gal Fuel Tank

8" Never-flat Wheels



## SPG5568

### 70006

5500 Running Watts

6875 Starting Watts

120/240V AC Voltage

SIMPSON® OHV 420cc Engine

Automatic Voltage Regulation

Recoil Start

6.1 gal Fuel Tank

9" Never-flat Wheels



## SPG7085E<sup>1</sup>

### 70010

7000 Running Watts

8500 Starting Watts

120/240V AC Voltage

HONDA® GX390 Engine

Automatic Voltage Regulation

Recoil/E-Start

6.1 gal Fuel Tank

9" Never-flat Wheels



## SPG7593E<sup>1</sup>

### 70007

7500 Running Watts

9375 Starting Watts

120/240V AC Voltage

SIMPSON® OHV 420cc Engine

Automatic Voltage Regulation

Recoil/E-Start

6.1 gal Fuel Tank

9" Never-flat Wheels



## SPG8310E<sup>1</sup>

### 70008

8300 Running Watts

10000 Starting Watts

120/240V AC Voltage

SIMPSON® OHV 439cc Engine

Automatic Voltage Regulation

Recoil/E-Start

6.1 gal Fuel Tank

9" Never-flat Wheels

\*Units are 50 State EPA/CARB compliant except 70029

<sup>1</sup> 12V battery NOT included

# HIGH PERFORMANCE HOSES

## MORFLEX® HOSE SERIES



| PART #         | 40224 (41107)                   | 40225 (41108)                   | 40226 (41109)                   |
|----------------|---------------------------------|---------------------------------|---------------------------------|
| MAX PRESSURE   | 3300 PSI                        | 3700 PSI                        | 3700 PSI                        |
| DIMS           | 1/4" x 25'                      | 5/16" x 25'                     | 5/16" x 50'                     |
| CONSTRUCTION   | Polyester braided               | Polyester braided               | Polyester braided               |
| OUTER MATERIAL | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors |
| FITTINGS       | M22 w/ Hose Connector           | M22 w/ Hose Connector           | M22 w/ Hose Connector           |
| MAX TEMP       | 140° F                          | 140° F                          | 140° F                          |

## SANTOPRENE™ HOSE



| PART #         | 41182                           |
|----------------|---------------------------------|
| MAX PRESSURE   | 4000 PSI                        |
| DIMS           | 1/4" x 25'                      |
| CONSTRUCTION   | Polyester & Steel-braided       |
| OUTER MATERIAL | Polyurethane w/ Bend Protectors |
| FITTINGS       | M22 w/ Hose Connector           |
| MAX TEMP       | 140° F                          |

## MONSTER HOSE™ SERIES



1 pc QC  
2 pc Rigid/Swivel

| PART #         | 41113                           | 41028 (41071)                   | 41030                           | 41032                           | 41034                           |
|----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| MAX PRESSURE   | 4500 PSI                        | 4500 PSI                        | 4500 PSI                        | 4500 PSI                        | 4500 PSI                        |
| DIMS           | 3/8" x 25'                      | 3/8" x 50'                      | 3/8" x 100'                     | 3/8" x 150'                     | 3/8" x 200'                     |
| CONSTRUCTION   | Polyester & Steel-braided       | Polyester & Steel-braided       | Polyester & Steel-braided       | Polyester & Steel-braided       | Polyester & Steel-braided       |
| OUTER MATERIAL | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors |
| FITTINGS       | QC Socket & Plug <sup>1</sup>   | QC Socket & Plug <sup>1</sup>   | QC Socket & Plug <sup>2</sup>   | QC Socket & Plug <sup>2</sup>   | QC Socket & Plug <sup>2</sup>   |
| MAX TEMP       | 140° F                          | 140° F                          | 140° F                          | 140° F                          | 140° F                          |

## ARMOR HOSE™ SERIES



2 pc Rigid/Swivel

| PART #         | 41114 (41095)                   | 41096                           | 41115                           |
|----------------|---------------------------------|---------------------------------|---------------------------------|
| MAX PRESSURE   | 4500 PSI                        | 4500 PSI                        | 4500 PSI                        |
| DIMS           | 3/8" x 50'                      | 3/8" x 100'                     | 3/8" x 200'                     |
| CONSTRUCTION   | Polyester & Steel-braided       | Polyester & Steel-braided       | Polyester & Steel-braided       |
| OUTER MATERIAL | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors | Polyurethane w/ Bend Protectors |
| FITTINGS       | QC Socket & Plug <sup>1</sup>   | QC Socket & Plug <sup>1</sup>   | QC Socket & Plug <sup>1</sup>   |
| MAX TEMP       | 250° F                          | 250° F                          | 250° F                          |

## WRAPPED RUBBER HOSE SERIES



2 pc Rigid/Swivel

| PART #         | 41183                             | 41184                             | 41185                             | 41186                             | 41187                             |
|----------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| MAX PRESSURE   | 4500 PSI                          | 8000 PSI                          | 8000 PSI                          | 8000 PSI                          | 10,000 PSI                        |
| DIMS           | 3/8" x 50'                        | 3/8" x 50'                        | 3/8" x 100'                       | 3/8" x 200'                       | 3/8" x 50'                        |
| CONSTRUCTION   | R1 Steel-braided                  | R2 Steel-braided                  | R2 Steel-braided                  | R2 Steel-braided                  | R2 Steel-braided                  |
| OUTER MATERIAL | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors |
| FITTINGS       | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     |
| MAX TEMP       | 250° F                            | 250° F                            | 250° F                            | 250° F                            | 250° F                            |

| PART #         | 41188                             | 41189                             | 41190                             | 41191                             | 41192                             |
|----------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| MAX PRESSURE   | 10,000 PSI                        | 10,000 PSI                        | 10,000 PSI                        | 10,000 PSI                        | 10,000 PSI                        |
| DIMS           | 3/8" x 100'                       | 3/8" x 200'                       | 1/2" x 50'                        | 1/2" x 100'                       | 1/2" x 200'                       |
| CONSTRUCTION   | R2 Steel-braided                  | R2 Steel-braided                  | R2 Steel-braided                  | R2 Steel-braided                  | R2 Steel-braided                  |
| OUTER MATERIAL | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors | Wrapped Rubber w/ Bend Protectors |
| FITTINGS       | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     | QC Socket & Plug <sup>1</sup>     |
| MAX TEMP       | 250° F                            | 250° F                            | 250° F                            | 250° F                            | 250° F                            |

# AAA™ INDUSTRIAL TRIPLEX PUMPS

LIMITED WARRANTY



| C32                                           | C32                                           |
|-----------------------------------------------|-----------------------------------------------|
| ◆ 90036                                       | ◆ 90037                                       |
| 3200 PSI                                      | 3400 PSI                                      |
| 2.8 GPM                                       | 2.5 GPM                                       |
| Brass Manifold                                | Brass Manifold                                |
| Integrated & Adjustable w/Easy Start Unloader | Integrated & Adjustable w/Easy Start Unloader |
| 3/4" Shaft                                    | 3/4" Shaft                                    |
| Garden Hose Inlet/M22 Outlet                  | Garden Hose Inlet/M22 Outlet                  |

LIMITED WARRANTY



| C42                                           | C42                                           |
|-----------------------------------------------|-----------------------------------------------|
| ◆ 90039                                       | ◆ 90034                                       |
| 4000 PSI                                      | 4400 PSI                                      |
| 3.5 GPM                                       | 4.0 GPM                                       |
| Brass Manifold                                | Brass Manifold                                |
| Integrated & Adjustable w/Easy Start Unloader | Integrated & Adjustable w/Easy Start Unloader |
| 1" Shaft                                      | 1" Shaft                                      |
| Garden Hose Inlet/QC Outlet                   | Garden Hose Inlet/QC Outlet                   |

◆ -Indicates pump equipped with PowerBoost®  
( ) -Indicates retail version



Driven By PERFORMANCE™





Driven By **PERFORMANCE™**

# OEM TECHNOLOGIES™ & AAA™ AXIAL CAM PUMPS

## VERTICAL

LIMITED WARRANTY



|                                  |
|----------------------------------|
| <b>90025</b>                     |
| 2400 PSI                         |
| 2.0 GPM                          |
| Clear Anodized Aluminum Manifold |
| Integrated w/Easy Start Unloader |
| 7/8" Shaft                       |
| Garden Hose Inlet/M22 Outlet     |

|                                  |
|----------------------------------|
| <b>90026</b>                     |
| 3000 PSI                         |
| 2.5 GPM                          |
| Clear Anodized Aluminum Manifold |
| Integrated w/Easy Start Unloader |
| 7/8" Shaft                       |
| Garden Hose Inlet/M22 Outlet     |

LIMITED WARRANTY



|                                  |
|----------------------------------|
| <b>90027</b>                     |
| 3100 PSI                         |
| 2.5 GPM                          |
| Brass Manifold                   |
| Integrated w/Easy Start Unloader |
| 7/8" Shaft                       |
| Garden Hose Inlet/M22 Outlet     |

## HORIZONTAL

LIMITED WARRANTY



|                                  |
|----------------------------------|
| <b>90028</b>                     |
| 3000 PSI                         |
| 2.4 GPM                          |
| Clear Anodized Aluminum Manifold |
| Integrated w/Easy Start Unloader |
| 3/4" Shaft                       |
| Garden Hose Inlet/M22 Outlet     |

LIMITED WARRANTY



|                                  |
|----------------------------------|
| <b>90029</b>                     |
| 3100 PSI                         |
| 2.5 GPM                          |
| Brass Manifold                   |
| Integrated w/Easy Start Unloader |
| 3/4" Shaft                       |
| Garden Hose Inlet/M22 Outlet     |

LIMITED WARRANTY



|                                               |
|-----------------------------------------------|
| <b>AX300</b>                                  |
| <b>90052</b>                                  |
| 3500 PSI                                      |
| 2.5 GPM                                       |
| Brass Manifold                                |
| Integrated & Adjustable w/Easy Start Unloader |
| 3/4" Shaft                                    |
| Garden Hose Inlet/M22 Outlet                  |

♦ Indicates pump equipped with PowerBoost®

## QUALITY ACCESSORIES

### NOZZLES

**SET OF 5 SPRAY NOZZLES:**  
0°, 15°, 25°, 40° AND SOAP



|              |              |
|--------------|--------------|
| <b>PART#</b> | <b>80145</b> |
| MAX PRESSURE | 3600 PSI     |
| MAX TEMP     | 140° F       |
| NOZZLE SIZE  | 3.0          |
| FITTINGS     | 1/4" QC Plug |

**SECOND STORY NOZZLE SET:**  
SOAP & RINSE



|              |
|--------------|
| <b>80146</b> |
| 4500 PSI     |
| 140° F       |
| 4.0          |
| 1/4" QC Plug |

**5-N-1 SPRAY NOZZLE:**  
0°, 15°, 25°, 40° AND SOAP



|              |
|--------------|
| <b>80177</b> |
| 5000 PSI     |
| 140° F       |
| 10 - 40      |
| 1/4" QC Plug |

|              |
|--------------|
| <b>80142</b> |
| 3600 PSI     |
| 140° F       |
| 2.8 - 3.2    |
| 1/4" QC Plug |

**TURBO NOZZLES:**  
OSCELLATING JET



|              |
|--------------|
| <b>80143</b> |
| 3600 PSI     |
| 140° F       |
| 3.0          |
| 1/4" QC Plug |

|              |
|--------------|
| <b>80144</b> |
| 4500 PSI     |
| 140° F       |
| 4.0          |
| 1/4" QC Plug |

### DIAL-N-WASH®

**ADJUSTABLE PRESSURE REGULATOR**



|               |              |
|---------------|--------------|
| <b>PART #</b> | <b>82232</b> |
| MAX PRESSURE  | 4500 PSI     |
| MAX TEMP      | 140° F       |
| FITTINGS      | M22 x M22    |

### PUMP CARE

**PUMP GUARD**



|              |              |
|--------------|--------------|
| <b>PART#</b> | <b>80130</b> |
| VOLUME       | 12 oz        |

**PUMP OIL**



|              |
|--------------|
| <b>80138</b> |
| 16 oz        |

**O-RING & FILTER KIT**



|              |                                                            |
|--------------|------------------------------------------------------------|
| <b>PART#</b> | <b>80151</b>                                               |
| INCLUDES     | Two Filters:<br>One Size<br>Two O-Ring Sets:<br>Five Sizes |

# QUALITY ACCESSORIES CONT'D



Driven By **PERFORMANCE™**

## GUNS & WANDS

|                       | FRONT LOAD<br>SPRAY GUN | SPRAY GUN w/<br>SIDE ASSIST | PRO GUN HANDLE              | 16" SPRAY<br>WAND | 31" SPRAY<br>WAND | 48" INSULATED<br>LANCE |
|-----------------------|-------------------------|-----------------------------|-----------------------------|-------------------|-------------------|------------------------|
| <b>PART#</b>          | <b>80147</b>            | <b>80148</b>                | <b>80178</b>                | <b>80149</b>      | <b>80150</b>      | <b>80179</b>           |
| MAX PRESSURE          | 3600 PSI                | 4500 PSI                    | 5000 PSI                    | 3600 PSI          | 4500 PSI          | 5000 PSI               |
| MAX TEMP              | 140° F                  | 140° F                      | 212° F                      | 140° F            | 140° F            | 212° F                 |
| HARDWARE/<br>FITTINGS | M22                     | M22 w/ QC<br>Adapter        | NPT w/ QC & M22<br>Adapters | 1/4" QC<br>x M22  | 1/4" QC<br>x M22  | 1/4" QC<br>x 1/4" NPT  |

## SURFACE CLEANERS

### 15" SURFACE CLEANER



|               |                        |
|---------------|------------------------|
| <b>PART #</b> | <b>80165</b>           |
| MAX PRESSURE  | 3600 PSI               |
| MAX TEMP      | 140° F                 |
| FITTINGS      | 1/4" QC                |
| CONSTRUCTION  | Powder Coated<br>Steel |

### 20" COMMERCIAL SURFACE CLEANER

Includes high PSI inlet filter



|                |
|----------------|
| <b>80182</b>   |
| 4500 PSI       |
| 212° F         |
| 3/8" QC        |
| Heavy-duty ABS |

## HOSE REELS



|               |                  |                  |
|---------------|------------------|------------------|
| <b>PART #</b> | <b>80399</b>     | <b>80403</b>     |
| MAX PRESSURE  | 6000 PSI         | 6000 PSI         |
| MAX TEMP      | 212° F           | 212° F           |
| CAPACITY      | 100' x 3/8"      | 200' x 3/8"      |
| CONSTRUCTION  | Heavy-duty Steel | Heavy-duty Steel |

Hose reel installation kits available for all reels. Additional reels available in zinc plated and stainless steel.



CONTACT YOUR SALES REPRESENTATIVE AT:

**SALES@SIMPSONCLEANING.COM OR CALL 1-847-348-1500**

**For more information visit us at [www.simsponcleaning.com](http://www.simsponcleaning.com)**