

PRODUCT CATALOG

RESIDENTIAL | COMMERCIAL | INDUSTRIAL



TABLE OF CONTENTS

- 3 | RESIDENTIAL PRESSURE WASHERS
- 4 CLEAN MACHINE® SERIES
- 5 PREMIUM RESIDENTIAL PRESSURE WASHERS
- **6** MEGASHOT™ SERIES
- 8 COMMERCIAL PRESSURE WASHERS
- 9 POWERSHOT™ SERIES
- **10** PRO SERIES
- **10** ALUMINUM SERIES
- 11 WATER BLASTER® SERIES
- 13 INDUSTRIAL PRESSURE WASHERS
- **14** INDUSTRIAL SERIES
- **14** WATER SHOTGUN® SERIES
- **15** SUPER PRO ROLL CAGE SERIES
- 17 HOT WATER PRESSURE WASHERS
- **18** BRUTE SERIES
- 19 MOBILE TRAILER PRESSURE WASHERS
- 21 PORTABLE GENERATORS
- **22** COMMERCIAL SERIES
- **24** INDUSTRIAL SERIES
- **27** INVERTER AND PARALLEL BOX
- 29 HIGH PERFORMANCE HOSES
- 35 PREMIUM ACCESSORIES
- 38 POWERBOOST® TECHNOLOGY
- 39 PRESSURE WASHER PUMP KITS
- **41** BECOME A DEALER
- **42** CETA® TESTING STANDARDS

RESIDENTIAL PRESSURE WASHERS

SIMPSON's residential pressure washers are perfect for the homeowner or the DIYer. These compact gas and electric pressure washers are lightweight, easy to move and store and provide powerful cleaning results for light to medium duty applications. These models are equipped with SIMPSON gas engines or electric motors, and OEM Technologies™ pumps. Producing a PSI range of ratings from 2300 to 3400, SIMPSON's residential line will make easy work of the toughest home projects.



"I live in a row house and needed something small for storage, T but could help me keep the exterior of my home clean. This machine folds down, fits in narrow spaces and impressed me with its cleaning power! I highly recommend it!" **Jackie, Kansas City, MO - CM60912**



Check out more of our product reviews at **SIMPSONCLEANING.COM**













SIMPSON

RESIDENTIAL PRESSURE WASHERS



CLEAN MACHINE® SERIES







WARRANT







MODEL NUMBER	CM60976(-S)*	CM60912(-S)*
PART NUMBER	60976 (61016)	60912 (60972)
PRESSURE RATING	2300 PSI	2400 PSI
FLOW RATING	1.2 GPM	2.0 GPM
ENGINE/MOTOR	SIMPSON® 120V Electric Motor	SIMPSON® 149cc
PUMP	OEM Technologies™Axial Cam	OEM Technologies [™] Axial Cam
HOSE	1/4" x 25' x M22	1/4" x 25' x M22
TIRE/WHEEL	10" Never-flat	6" Never-flat
	*Made in USA, excludes CM60976 & CM60912.	







MODEL NUMBER	CM61081(-S)	CM61082(-S)	CM61083(-S)
PART NUMBER	(61081)	(61082)	(61083)
PRESSURE RATING	2800 PSI	3200 PSI	3500 PSI
FLOW RATING	2.3 GPM	2.4 GPM	2.5 GPM
ENGINE	SIMPSON® OHV	SIMPSON® OHV	SIMPSON® OHV
PUMP	OEM Technologies™Axial Cam	OEM Technologies™Axial Cam	OEM Technologies™Axial Cam
HOSE	1/4" x 25' x M22	1/4" x 25' x M22	5/16" x 25' x M22
TIRE/WHEEL	8" Never-flat	12" Never-flat	10" Premium Pneumatic
(-S) Indicates shippable packagin	g.	First Section 1	



PREMIUM RESIDENTIAL PRESSURE WASHERS

produce a range of PSI ratings from 2800 to 3300, helping you tackle the task at hand.

SIMPSON's premium residential line of pressure washers provide an optimal experience with minimal

models featuring SIMPSON®, HONDA®, KOHLER®, or BRIGGS & STRATTON® engines, these machines

effort. The lightweight design of these machines make it easy for one person to move, use, and store. With



PREMIUM RESIDENTIAL PRESSURE WASHERS



WARRANTY

Includes on board

BONUS!

GAS POWERED

Includes Dial-N-Wash®



MODEL NUMBER	MS60773(-S)
PART NUMBER	60773 (60784)
PRESSURE RATING	2800 PSI
FLOW RATING	2.3 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat



2800 PSI 2.3 GPM

OEM Tec 1/4" x 25

See page 41 for information.


Includes Dial-N-Wash®



8(-S)*	MS61001(-S)
1061)	(61013)
	3000 PSI
	2.3 GPM
& STRATTON® 725 EXI	HONDA® GCV160
hnologies™ Axial Cam	OEM Technologies™ Axial Cam
i' x M22 Hose	1/4" x 25' x M22, MorFlex®
er-flat	12" Never-flat



		8
MODEL NUMBER	$\overline{\mathcal{I}}$	MS61039
PART NUMBER	$\overline{\mathcal{I}}$	61039
PRESSURE RATING		3000 PSI
FLOW RATING	$\overline{\mathcal{L}}$	2.4 GPM
ENGINE	$\overline{}$	HONDA® GCV160
PUMP	$\overline{\mathcal{L}}$	OEM Technologies™ Axial Cam
HOSE	\mathcal{I}	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL		12" Never-flat





MS60805(-S)
(60808)
3000 PSI
2.4 GPM
HONDA® GCV160
OEM Technologies™ Axial Cam
1/4" x 25' x M22, MorFlex®
12" Never-flat

"I did a lot of research before I bought the SIMPSON MSH3125-S because this was the first pressure washer that I would own. I have had the machine for 2 weeks now and have cleaned my stamped patio and my composite 12' x 26' porch. Well, I should say that my wife used the machine on the patio and I used it on the porch and we thought it worked great. It exceeded my expectations for power and ease of use. Truly a good buy."

- Joe and Linda, Blasdell, New York- MSH3125-S



Check out more of our product reviews at SIMPSONCLEANING.COM



















SIMPSONCLEANING.COM | 6

PREMIUM RESIDENTIAL PRESSURE WASHERS



MEGASHOT™ SERIES HORIZONTAL



LIMITED WARRANTY







₹Bonus!










MODEL NUMBER	MS61043(-S)*	MS60763(-S)	MS31025HT	MS60921
PART NUMBER	61043 /60167 (61066 / 60168)	(60763)	60652	60921
PRESSURE RATING	3000 PSI	3100 PSI	3200 PSI	3300 PSI
FLOW RATING	2.4 GPM	2.4 GPM	2.5 GPM	2.4 GPM
ENGINE	SIMPSON® 212cc	KOHLER® RH265	HONDA® GC190	HONDA® GC190
PUMP	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium	12" Never-flat	10" Premium Pneumatic	10" Premium Pneumatic

*Contact a Sales Representative for availability See page 41 for information









	MS61049(-S)*
	61049 (61062)
	3300 PSI
	2.4 GPM
	HONDA® GC190
	OEM Technologies™ Axial Cam
	1/4" x 25' x M22, MorFlex®
	10" Premium Pneumatic
*0	antest a Calas Danasantativa for availability

See page 41 for information.

1/4" x 25' x M22, MorFlex® 10" Premium Pneumatic

(-S) Indicates shippable packaging. Part numbers 61043 & 61066 are equipped with 49 State engines, not to be sold in California.

COMMERCIAL PRESSURE WASHERS

As a pioneer in the pressure washer industry, SIMPSON® has led the way in providing functional innovation for cleaning professionals. With a selection of models providing PSI ratings from 3300 to 4400, our commercial line provides the power pros need. These machines are built to last with strong steel or aluminum frames, reliable SIMPSON or HONDA® engines, and commercial grade pumps.



"I did a lot of research on pressure washers and I decided to purchase this one because the price was excellent. I was not surprised how well this machine works since I had read several reviews. The first pull, the machine started and it is much guieter than most other pressure washers. Since it is a commercial product, I expect it to last for years to come. Great value, great product." -Tim, Monroe, NC, USA - PS3228-S



Check out more of our product reviews at SIMPSONCLEANING.COM













SIMPSON HONDA SIMPSONCLEANING.COM | 8 7 | SIMPSONCLEANING.COM

COMMERCIAL PRESSURE WASHERS



POWERSHOT™ SERIES



WARRANTY







BONUS! Includes 15" surface cleaner







MODEL NUMBER	PS3228(-S) 10051	PS61002(-S)	PS61050(-S)	PS60995(-S)
PART NUMBER	(60629)	61002 (61014)	61050 (61063)	60995 (60996)
PRESSURE RATING	3300 PSI	3500 PSI	3500 PSI	3600 PSI
FLOW RATING	2.5 GPM	2.5 GPM	2.5 GPM	2.5 GPM
ENGINE	HONDA® GX200	HONDA® GX200	HONDA® GX200	HONDA® GX200
PUMP	AAA™ Triplex	AAA™ AX300 Axial Cam	AAA™ AX300 Axial Cam	AAA™ Triplex
HOSE	5/16" x 25' x M22, MorFlex®			
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic







MODEL NUMBER	PS3835	PS60869	PS4240	PS60843
PART NUMBER	60579	60869	60456	60843
PRESSURE RATING /	3800 PSI	4000 PSI	4200 PSI	4400 PSI
FLOW RATING	3.5 GPM	3.5 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX270	HONDA® GX270	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	AAA™ Triplex	AAA™ Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster			
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic

COMMERCIAL PRESSURE WASHERS



PRO SERIES

















MODEL NUMBER	7	PS61044(-S)	PS60982 805	PS60918 70057
PART NUMBER	7	61044 (61064)	60982	60918
PRESSURE RATING	7	3400 PSI	3700 PSI	4000 PSI
FLOW RATING	7	2.3 GPM	2.5 GPM	3.5 GPM
ENGINE	7	HONDA® GS190	HONDA® GX200	HONDA® GX270
PUMP	7	AAA™ AX300 Pro Axial	AAA™ Triplex	AAA [™] Triplex
HOSE	7	5/16" x 25' x M22, MorFlex®	5/16" x 50' x M22, MorFlex®	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	7	10" Premium Pneumatic	10" Premium Pneumatic	13" Premium Pneumatic

ALUMINUM SERIES















				251
MODEL NUMBER	\mathcal{I}	ALH3228(-S)	ALH3425(-S)	ALH4240
PART NUMBER	$\overline{\mathcal{I}}$	(60735)	60768 (60689)	60688
PRESSURE RATING	\mathcal{I}	3400 PSI	3600 PSI	4200 PSI
FLOW RATING	$\overline{\mathcal{I}}$	2.5 GPM	2.5 GPM	4.0 GPM
ENGINE	7	HONDA® GX200	HONDA® GX200	HONDA® GX390
PUMP	7	CAT PUMPS® Triplex	AAA [™] Triplex	CAT PUMPS® Triplex
HOSE	$\overline{\mathcal{I}}$	5/16" x 25' x QC, Steel-braided Monster	5/16" x 35' x M22, MorFlex®	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	$\overline{\mathcal{L}}$	10" Premium Pneumatic	10" Premium Pneumatic	13" Premium Pneumatic

COMMERCIAL PRESSURE WASHERS



ALUMINUM WATER BLASTER® SERIES



LIMITED WARRANTY















MODEL NUMBER	ALWB60827	ALWB60828	ALWB60825
PART NUMBER	60827	60828	60825
PRESSURE RATING	4200 PSI	4200 PSI	4400 PSI
FLOW RATING	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX390	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	CAT PUMPS® Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braide

WATER BLASTER® SERIES

















MODEL NUMBER	WB4200	WB60824
PART NUMBER	60205	60824
PRESSURE RATING	4200 PSI	4400 PSI
FLOW RATING	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA [™] Triplex	AAA [™] Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic



INDUSTRIAL PRESSURE WASHERS



The industrial line provides a selection of extra-tough, cold-water machines. Equipped with reliable SIMPSON®, HONDA®, KOHLER®, or VANGUARD® engines, and commercial grade pumps that deliver pressure ratings between 2700 to 7000 PSI. SIMPSON's industrial pressure washers are perfect for conquering any industrial cleaning task.

INDUSTRIAL SERIES

Featuring high performance engines and AAA™ or COMET industrial grade pumps. Our AAA™ Triplex pumps are equipped with a bolt-on external unloader and bypass hose. Models include either steel or aircraft grade aluminum frames.



WATER SHOTGUN® SERIES

Featuring patented innovations and superior craftsmanship. Equipped with COMET bolt-on external unloader and bypass hose, with heavy duty aluminum frames.



13 | SIMPSONCLEANING.COM

SUPER PRO ROLL CAGE SERIES

RTIFIED DURABILITY

Featuring heavy gauge 1.5" welded steel frame design, strong steel lifting points, and a powerful mix of industrial engine and pump combinations

"I have a window cleaning and pressure washing business, and for the money there is nothing that compares, great machine, tons of power. The customer service is excellent, needed a part for the pump and they sent it right out to me. Couldn't be more happy with the performance and customer service."

-Bernie, La Quinta, CA-IR61029



Check out more of our product reviews at **SIMPSONCLEANING.COM**



SIMPSON HONDA POWERED BY KOHLER VANGUARD

INDUSTRIAL PRESSURE WASHERS



INDUSTRIAL SERIES



WARRANT















MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE	PUMP	TIRE/WHEEL	HOSE
IR61023 ¹	61023	2700 PSI	2.7 GPM	DIRECT	HONDA® GC190	AAA™ AX300 Pro Axial	10" Foam Filled	5/16" x 50' x QC, Steel-braided Monster
IR610221	61022	3000 PSI	2.7 GPM	DIRECT	HONDA® GX200	AAA™ AX300 Pro Axial	10" Foam Filled	5/16" x 50' x QC, Steel-braided Monster
IR61024 ²	61024	3000 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Foam Filled	3/8" x 50' x QC, Steel-braided Monster
IR61026 ²	61026	3500 PSI	4.0 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster
IR61028 ²	61028	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster
IR61029 ²	61029	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster
IR61030 ²	61030	4200 PSI	4.0 GPM	BELT	HONDA® GX390	COMET Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster

¹ Black welded heavy gauge steel frame, powdered coated for corrosion resistance.

WATER SHOTGUN® SERIES





MODEL NUMBER	WS4050V	WS5050H
PART NUMBER	60242	60243
PRESSURE RATING	4000 PSI	5000 PSI
FLOW RATING	5.0 GPM	5.0 GPM
ENGINE	VANGUARD® V-Twin / E-Start	HONDA® GX630 / E-Start
PUMP	COMET Premium Series	COMET Premium Series
HOSE	3/8" x 50' x QC, Steel-braided Rubber	3/8" x 50' x QC, Steel-braided Rubber
TIRE/WHEEL	13" Premium Aluminum	13" Premium Aluminum
	*Battery not included. Requires12V Garden tractor battery	*Battery not included. Requires12V Garden tractor battery

WARRANTY









Includes external fuel tank

SIMPSONCLEANING.COM | 14

² Ultra lightweight aircraft grade aluminum frame.

INDUSTRIAL PRESSURE WASHERS



SUPER PRO ROLL CAGE SERIES FEATURES

INDUSTRIAL PRESSURE WASHERS







LIMITED





COMMERCIAL	COMMUNICAL	COMMERC
ENGINE	PUMP	FRAM
KOHLER& VANGUARD		

VARRANTY	COVIDENCE PROTECTION PLUS
	HONDA GX & SIMPSON ENGINES
	VISIT WWW.SIMPSONCLEANING.COM/E

	MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE	PUMP	TIRE/WHEEL	HOSE
	SW3625HADS	65200	3600 PSI	2.5 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
Ħ	SW3030HADS	65221	3000 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
SM.	SW3625SADS	65202	3600 PSI	2.5 GPM	DIRECT	SIMPSON® 208cc	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
	SW3030SADS	65222	3000 PSI	3.0 GPM	DIRECT	SIMPSON® 224cc	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
_									
	SW4035HADM	65203	4000 PSI	3.5 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW3540HADM	65223	3500 PSI	4.0 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
M	SW4440HCDM	65206	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
MEDI	SW4440SCDM	65208	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4440HCBM	65209	4200 PSI	4.0 GPM	BELT	HONDA® GX390	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4240SABM	65224	4200 PSI	4.0 GPM	BELT	SIMPSON® 420cc	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4050VCGL	65212*	4000 PSI	5.0 GPM	GEAR	VANGUARD® 570cc	COMET Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW5050HCGL	65213*	5000 PSI	5.0 GPM	GEAR	HONDA® GX690	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
LARGE	SW6050KCGL	65214*	6000 PSI	5.0 GPM	GEAR	KOHLER® CH750	COMET Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
ΙΨ	SW7040KCGL	65215*	7000 PSI	4.0 GPM	GEAR	KOHLER® CH750	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW3080HUGL	65217*	3000 PSI	8.0 GPM	GEAR	HONDA® GX690	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4060SUGL	65219*	4000 PSI	6.0 GPM	GEAR	SIMPSON® 679cc	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided

ery not included. Requires12V Garden tractor battery type U1.

SUPER PRO ROLL CAGE SERIES



WARRANTY







HONDA GX & SIMPSON ENGINES
VISIT WWW.SIMPSONCLEANING.COM/EPP



MEDIUM

42" x 36.25" x 33.5"

LARGE

47.5" x 29.5" x 38.5" Large external fuel tank for extended run time.

WITH HIGH-PERFORMANCE INDUSTRIAL FEATURES



31" x 24.25" x 28.25"

High & low pressure mountable hose reels available. (Sold separately from unit.)

> Built for the tough jobs with SIMPSON®, HONDA® or KOHLER® engines.



Strong steel lifting points for quick crane lifting and reinforced welded design with solid wheel axle for easy forklift transfer.

> **Bolt-on external unloader with bypass** hose provides durability for extended pump life.



Four wheel, heavy gauge 1.5" steel frame design with a wheel locking brake system.

HOSE REELS ALSO LISTED IN ACCESSORIES SECTION ON PAGE 37.



PART NUMBER	80399	80403
MAX PRESSURE	5000 PSI	5000 PSI
MAXTEMP	212° F	212° F
HOSE CAPACITY	100' x 3/8"	200' x 3/8"
MATERIAL	Heavy-duty Steel Construction	Heavy-duty Steel Construction

HOSE REEL INSTALLATION KITS

ALL INSTALLATION KITS COME COMPLETE WITH JUMPER HOSES & HARDWARE. INSTALLATION KITS

MUST BE PURCHASED IN ORDER FOR HOSE REEL TO BE CONNECTED TO UNIT.

Roll Cage low pressure kit

Small Roll Cage high pressure kit

M/L Roll Cage high pressure kit

HOT WATER PRESSURE WASHERS

With a series of hot water machines ranging in size, SIMPSON's Brute series is designed to perform in a variety of industrial cleaning situations. This robust lineup of hot-water pressure washers feature commercial engines powered by SIMPSON®, HONDA®, VANGUARD® or BRIGGS & STRATTON®. Equipped with either premium AAA™, CAT PUMPS®, COMET, or UDOR® industrial-grade pumps, professionals everywhere rely on Simpson's Brute series to get the job done right.



"The performance of this pressure washer really surprised me. Started easily, ran smoothly and the 50 feet of hose was the perfect length to allow me to reach where I needed to."

-Tony, New York City, NY- MB1518



Check out more of our product reviews at SIMPSONCLEANING.COM





HOT WATER PRESSURE WASHERS

MINI BRUTE^{1,}

BRUTE SERIES

















KING BRUTE XL^{2,3}



				_
MODEL NUMBER	MB1518	KB3028	KBXL3540	KBX
PART NUMBER	60363	65100	65120	6512
RESSURE RATING	1500 PSI	3000 PSI	3500 PSI	3500
FLOW RATING	1.8 GPM	2.8 GPM	4.0 GPM	4.0 G
ENGINE/MOTOR	120 V Electric	BRIGGS & STRATTON® OHV 1100	SIMPSON® 420cc	HON
PUMP	AAA® Triplex	CAT PUMPS® Industrial Triplex	AAA® Industrial Triplex	AAA®
INE FUEL CAPACITY	N/A	.75 gal Gasoline	1.6 gal Gasoline	1.6 g
NER FUEL CAPACITY	4.0 gal Diesel	5.0 gal Diesel	5.5 gal Diesel	5.5 g
DRIVE	Direct Drive	Direct Drive	Direct Drive	Direc
START	Electric	Recoil	Recoil	Reco
	1000			







BIG BRUTE^{2,3}

MODEL NUMBER	BB65106	BB65105	BB65108
PART NUMBER	65106	65105	65108
PRESSURE RATING	4000 PSI	4000 PSI	4000 PSI
FLOW RATING	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE/MOTOR	HONDA® GX390	VANGAURD® V-Twin	VANGAURD® V-Twin
PUMP	COMET Industrial Triplex	COMET Industrial Triplex	UDOR Industrial Triplex
ENGINE FUEL CAPACITY	6.0 gal Gasoline	6.0 gal Gasoline	6.0 gal Gasoline
BURNER FUEL CAPACITY	11 gal Diesel	11 gal Diesel	11 gal Diesel
DRIVE	Direct Drive	Direct Drive	Gear Drive
START	Recoil/ E-Start	E-Start	E-Start
TIRE/ WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic



- ¹MINI BRUTE includes a 15 amp high limit switch and 35' GFCI cord; not pictured.
- Battery not included on E-Start units. Requires 12V Garden tractor battery Type U1
- All Brute series models come standard with gun, lance, hose and nozzles.

SUPER BRUTE		
MODEL NUMBER	SB3555	SB4066
PART NUMBER	65110	65115
PRESSURE RATING	3500 PSI	4000 PSI
FLOW RATING	5.5 GPM	6.6 GPM
ENGINE/MOTOR	VANGUARD®570cc	SIMPSON® 679cc
PUMP	COMET Premium Series Industrial Triplex	UDOR Industrial Triplex
ENGINE FUEL CAPACITY	10 gal Gasoline	10 gal Gasoline
BURNER FUEL CAPACITY	10 gal Diesel	10 gal Diesel
DRIVE	Belt Drive	Gear Box
START	E-Start	E-Start
BASE	Forklift Feet / Permanent Mount	Forklift Feet / Permanent Mount

MOBILE TRAILER PRESSURE WASHERS



SIMPSON's mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailers, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.



"Investing in this pressure washer trailer has been one of the best investments I have made for my business! I can literally pull up to my customer sites and begin work without a water hookup necessary because of the huge water tank! Anyone with a pressure washer cleaning company should consider to add this to their fleet."

-Adam, Louisville, KY- 95003



Check out more of our product reviews at **SIMPSONCLEANING.COM**



MOBILE TRAILER PRESSURE WASHERS





	STAGE 1A	COLD WATER	STA	GE 1B COLD WATER		STAGE 1C HO	OT WATER
MODEL NUMBER	95000	95001	95002	95003	95004*	95005	95006
PRESSURE RATING	3200 PSI	3800 PSI	4200 PSI	4200 PSI	4200 PSI	4000 PSI	4000 PSI
FLOW RATING	2.8 GPM	3.5 GPM	4.0 GPM	4.0 GPM	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX200	HONDA® GX270	HONDA® GX390	HONDA® GX390 w/ Recoil & E-Start	VANGUARD V-TWIN w/ E-Start	HONDA® GX390 w/ Recoil & E-Start	VANGUARD V-TWIN w/ E-Start
PUMP	CAT PUMPS® Triplex	CAT PUMPS® Triplex	CAT PUMPS® Triplex	CAT PUMPS® Triplex	CAT PUMPS® Triplex	COMET Triplex	COMET Triplex
TRAILER SIZE	7' Overall (4' x 4' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)
TRAILER FRAME	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing
AXLE RATING	2000 lbs	2000 lbs	2000 lbs	2000 lbs	2000 lbs	3500 lbs	3500 lbs
TIRE	12" 6-Ply	12" 6-Ply	12" 6-Ply	12" 6-Ply	12" 6-Ply	13" 6-Ply	13" 6-Ply
LIGHTING	LED	LED	LED	LED	LED	LED	LED
TRAILER HITCH BALL SIZE	2" Ball	2" Ball	2" Ball	2" Ball	2" Ball	2" Ball	2" Ball
WATER TANK SIZE	100 Gal	150 Gal	150 Gal	150 Gal	150 Gal	200 Gal	200 Gal
HIGH PRESSURE HOSE	7 3/8"x 50' Steel-braided Monster w/ QC	3/8"x 100'Steel-braided Monster w/ QC	3/8"x 100' Steel-braided Monster w/ QC	3/8"x 100' Steel-braided Monster w/ QC	3/8"x 100' Steel-braided Monster w/ QC	3/8"x 100' Armor Hose™ w/ QC	3/8"x 100' Armor Hose™ w/ QC
HIGH PRESSURE HOSE REEL	100'	100'	100'	100'	100'	100'	100'
SUPPLY HOSE	N/A	N/A	N/A	N/A	N/A	3/4" x 75'	3/4" x 75'
SUPPLY HOSE REEL	N/A	N/A	N/A	N/A	N/A	Standard	Standard
Rattery not included. Require	es12V Garden tractor battery				95004 Comes with external		

*Battery not included. Requires12V Garden tractor battery type U1. 95004 Comes with external fuel tank.

19 | SIMPSONCLEANING.COM | 20

PREMIUM GENERATORS

SIMPSON's portable generators are perfect for providing power at work sites, recreational facilities, residential locations, and more. Many are equipped with a foldable handle for ease of mobility and storage. Their heavy-duty roll cage frames provide durability and protection for the generator. Whether tailgating before a game, charging tools at a construction site, or providing backup power for your home, rely on SIMPSON® for your power needs.



"...l am very happy with this generator. It was easy to assemble and get running. It starts well and isn't too loud when running. It can handle 5500 watts, which is enough for my fridge, sump pump and a few other things. It had a large gas tank so it can run overnight without needing to be refilled. I also have a lot more peace of mind knowing I have a backup plan..."

-Scott, Grayslake, IL -SPG5568



Check out more of our product reviews at **SIMPSONCLEANING.COM**











PREMIUM GENERATORS

COMMERCIAL SERIES











MODEL NUMBER	SPG3600	SPG3645	SPG5568
PART NUMBER	70029	70005	70006
STARTING WATTS	4000	4500	6875
RUNNING WATTS	3600	3600	5500
AC VOLTAGE	120V	120V	120/240V
AC FREQUENCY	60 Hz	60 Hz	60 Hz
ENGINE	SIMPSON® OHV	SIMPSON® OHV	SIMPSON® OHV
DISPLACEMENT	212cc	224cc	420cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic
START	Recoil	Recoil	Recoil
FUEL CAPACITY	3.4 gal Gasoline	3.4 gal Gasoline	6.1 gal Gasoline
TIRE/WHEEL	N/A	8" Never-flat	9" Never-flat
DIMENSIONS	27" x 23.1" x 20"	28.7"x 21.6" x 22.8"	31.1"x 21.6" x 23.8"
WEIGHT	101.4 lb	117.94 lb	194 lb







MODEL NUMBER	SPG7085E*	SPG7593E*	SPG8310E*
PART NUMBER	70010	70007	70008
STARTING WATTS	8500	9375	10000
RUNNING WATTS	7000	7500	8300
AC VOLTAGE	120/240V	120/240V	120/240V
AC FREQUENCY	60Hz	60 Hz	60 Hz
ENGINE	HONDA® GX390	SIMPSON® OHV	SIMPSON® OHV
DISPLACEMENT	389cc	420cc	439cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic
START	Recoil/E-Start	Recoil/E-Start	Recoil/E-Start
FUEL CAPACITY	6.1 gal Gasoline	6.1 gal Gasoline	6.1 gal Gasoline
TIRE/WHEEL	9" Never-flat	9" Never-flat	9" Never-flat
DIMENSIONS	31.1" x 21.6" x 23.8"	31.1" x 21.6" x 23.8"	31.1" x 21.6" x 23.8"
WEIGHT	191.8 lb	209.4 lb	220 lb

*Battery not included. Uses 12V-14AH battery.

SIMPSONCLEANING.COM | 22 SIMPSON HONDA

DISCOVER YOUR POWER

SIZING YOUR GENERATOR

Select the devices you wish to run at the same time


List any starting watts required Add up the running watts by your devices

of all of your devices

Add the HIGHEST starting watt listed to the total running watts required by your devices

DEVICE	STARTING WATTS	RUNNING WATTS	RECOMMENDED SIZE
LIGHT BULB	N/A	100	MINIMUM AMOUNT
REFRIGERATOR/ FREEZER	2200	700	OF STARTING WATTS NEEDED ON YOUR
CELL PHONE CHARGER	N/A	25	GENERATOR
TOTAL	2200	825	3025

GENERATOR PANEL CONFIGURATIONS*:

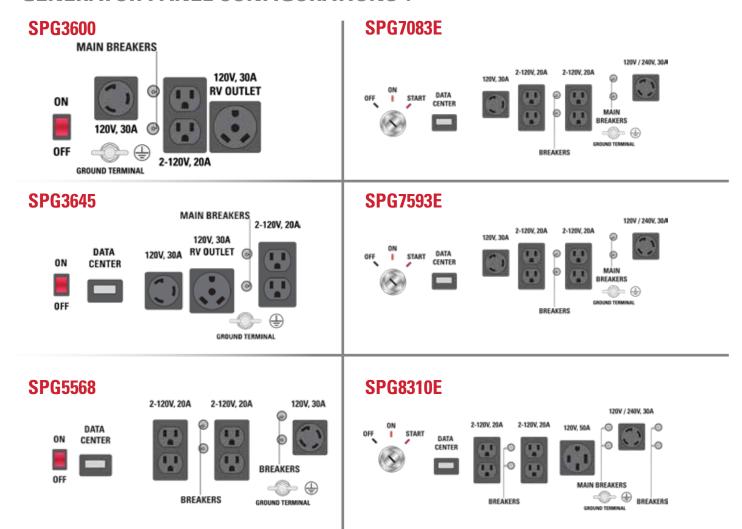

^{*}Generator panel configurations may vary from the above layout depending on the model.

PREMIUM GENERATORS

INDUSTRIAL SERIES

LIMITED WARRANTY 3YR





BUILT IN LIFT POINT

Equipped with a strong steel lifting point for quick crane lifting and easy job site transfer

CSA CERTIFIED RECEPTACLES

GFCI outlets standard on all models for use in OSHA safe work

WATERPROOF OUTLET COVERS

Provides safety and durable protection for all receptacles

EASY ACCESS CONTROL PANEL

Equipped with run time indicator

PREMIUM WHEELS

Provide easy maneuverability across various types of terrain

HEAVY-DUTY WELDED STEEL FRAME WITH POWDER COATED FINISH

Provides durability and corrosion resistance. Also features a fold-down handle for easy storage

MODEL NUMBER	SCGH5500	SCGH8500	SCGH8500E*	SCGH13000E*	SCGH15000E*
PART NUMBER	70053	70054	70055	70056	70057
STARTING WATTS	5500	8500	8500	13000	15000
RUNNING WATTS	4500	7000	7000	10500	13500
AC VOLTAGE	120V/240V	120V/240V	120V/240V	120V/240V	120V/240V
AC FREQUENCY	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
ENGINE	HONDA® GX270	HONDA® GX390	HONDA® GX390	HONDA® GX630	HONDA® GX690
DISPLACEMENT	270cc	389cc	389cc	688cc	688cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic	Automatic	Automatic
START	Recoil	Recoil	Recoil/ E-Start	E-Start	E-Start
FUEL CAPACITY	7.9 gal	7.9 gal	7.9 gal	7.9 gal	7.9 gal
TIRE/WHEEL	9" Never-flat	9" Never-flat	9" Never-flat *Rattery not included. Requires	9" Never-flat	9" Never-flat

Equipped with low oil shutdown to protect engine and extend product life

Please contact a Sales Representative for more details See page 41 for information.

*Battery not included. Requires 12V-14AH battery.

SCGH5500

(NEMA L5-20R) 2x 20A GCFI	(NEMA L14-30 1x 30A
	\odot

SCGH8500

000110300		
(NEMA L5-20R) 2x 20A GCFI	(NEMA L5-30R) 1x 30A	(NEMA L14-30R 1x 30A
=	\odot	\odot

SCGH8500E

(NEMA L5-20R)	(NEMA L5-30R)	(NEMA L14-30R)
2x 20A GCFI	1x 30A	1x 30A
=	\odot	

SCGH13000F

3641113000	<u> </u>	
(NEMA L5-20R)	(NEMA L5-30R)	(NEMA L14-30R)
2x 20A GCFI ²	1x 30A ²	1x 30A²
	\odot	\odot

SCGH15000F

000111300	OL .	
(NEMA L5-20F 2x 20A GCFI) (NEMA L5-30R) 1x 30A	(NEMA L14-30R) 1x 30A
	\odot	0

DEVICE WATTAGES

HEATING & COOLING

DEVICE	STARTING WATTS	RUNNING WATTS
10,000 BTU CENTRAL AC1	3000	1500
24,000 BTU CENTRAL AC1	4950	3800
1/2 HP FURNACE FAN BLOWER¹	2300	875
1/3 HP FURNACE FAN BLOWER¹	1400	700
HEAT PUMP	4500	4700
13 GAL HUMIDIFIER	-	175
SPACE HEATER	-	1800
10,000 BTU WINDOW AC	1800	1200
12,000 BTU WINDOW AC	3950	3250

RESIDENTIAL

DEVICE		STARTING WATTS	RUNNING WATTS
COFFEE MAKER		-	1500
COMPUTER		-	800
ELECTRIC DRYER		1800	5750
ELECTRIC RANGE	7/4	-	2100
ELECTRIC WATER HEATER		1000	2000
1/2 HP GARAGE DOOR OPENER	7/	2350	875
1250 WATT HAIR DRYER		-	1250
100 WATT LIGHT BULB		-	100
1000 WATT MICROWAVE		-	1000
REFRIGERATOR/ FREEZER		2200	700
SECURITY SYSTEM		-	500
1/2 HP SUMP PUMP		2150	1050
1/3 HP SUMP PUMP		1300	800
27" TELEVISION		-	500
TOASTER	4	-	1200
WASHING MACHINE	4	2300	1150
1/2 HP WELL PUMP	4	2100	1000
1/3 HP WELL PUMP		1400	750

¹Wattages listed are approximated, always check appliances for actual figures.

RECREATIONAL

DEVICE		STARTING WATTS	RUNNING WATTS
AM/ FM RADIO		-	100
BLENDER	74	450	400
20" BOX FAN	7	-	200
CD/ DVD PLAYER	7/4	-	100
CELLPHONE BATTERY CHARGER		-	25
13" COLOR TV		-	150
ELECTRIC GRILL		-	1650
INFLATER PUMP		150	50
OUTDOOR LIGHT STRING		-	250
13,500 BTU RV AC		700	1500
SLOW COOKER	7/	-	250

LANDSCAPING

<u>~</u>		
DEVICE	 STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350
ELECTRIC HEDGER	-	960
1/2 HP 12" ELEC. CHAIN SAW	-	900

WORK SITE

DEVICE	STARTING WATTS	RUNNING WATTS
1HP AIR COMPRESSOR	4500	1600
1/2 HP AIR COMPRESSOR	2000	1000
1/3 HP AIRLESS PAINT SPRAYER	1200	600
3" BELT SANDER	2400	1200
8" BENCH GRINDER	1100	1400
7-1/4" CIRCULAR SAW	2300	1400
1/2" HAND DRILL	900	600
3/8" HAND DRILL	600	400
10" MITER SAW	1800	1800
QUARTZ HALOGEN WORK LAMP	-	1000
RECIPROCATING SAW	-	960
TABLE SAW	2000	2000

AMP UP WITHPORTABLE POWER



INVERTER GENERATOR LIMITED WARRANTY ACCESSORY



AND PARALLEL BOX ACCESSORY



INVERTER GENERATOR

MODEL NUMBER	SIG2218
PART NUMBER	70011
STARTING WATTS	2200
RUNNING WATTS	1800
AC VOLTAGE	120V
AC FREQUENCY	60 Hz
AMPS	15
ENGINE	SIMPSON®
VOLTAGE REGULATION	Automatic
START	Recoil
FUEL CAPACITY	1.32 gal Gasoline
RUN TIME	8 Hour ¹




PARALLEL BOX ACCESSORY


MODEL NUMBER	SIG22PK	
PART NUMBER	80442	
AMPS	30	

The SIG22PK parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators rated up to 3300 running watts.

¹Run time with unit at 50% load.

- * Inverter generator and parallel box sold separately.
- * Unit is 50 State EPA/CARB compliant.

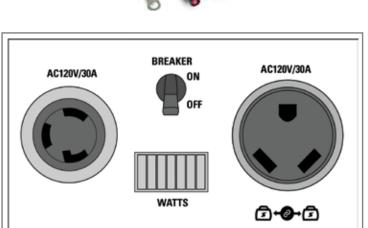



ACCURATE

Data center provides real time readings on fuel/wattage levels and run time.

QUIET

Power is quietly delivered in comparison to standard generator noise levels.

VERSATILE

Pair two inverter generators through a parallel box for twice the power when you need it.



HIGH-PERFORMANCE HOSES

Made in the USA* with high-quality foreign and domestic components, our hoses handle both hot and cold water applications while providing the flexibility and durability needed to survive the toughest job sites.



"This hose is awesome. It is very flexible, so you do not have to fight with stiffness or worry about any scuff marks showing on your sidewalks or patio. I highly recommend for a replacement hose or extension!"

Kels, Chicago, IL - MorFlex 40224



Check out more of our product reviews at SIMPSONCLEANING.COM



HIGH PERFORMANCE HOSES

WARRANTY



MORFLEX® HOSE SERIES WISA



SIMPSON's MorFlex technology is used for high flexibility and kink resistance. It has a lightweight polyester braid for easy handling and a polyurethane outer jacket that is non-marring and abrasion-resistant. MorFlex hoses are equipped with threaded M22 connections with a dual o-ring design to fit most gas and electric pressure washers with standard M22 connections.



PART NUMBER	40224 (41107)	40225 (41108)	40226 (41109)
MAX PRESSURE	3300 PSI	3700 PSI	3700 PSI
ID x LENGTH	1/4" x 25'	5/16" x 25'	5/16" x 50'
MAXTEMP	140° F	140° F	140° F
INNER MATERIAL	Polyester	Polyester	Polyester
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
ADAPTER	M22 x M22 MNPT	M22 x M22 MNPT	M22 x M22 MNPT
TERMINATED	M22 FNPT x M22 FNPT	M22 ENPT x M22 ENPT	M22 FNPT x M22 FNPT

SANTOPRENE™ HOSE **SANTOPRENE**



SIMPSON's Santoprene cold water hose delivers extended hose life. This polyester and steel-braided, abrasion resistant hose is designed to fit most gas and electric pressure washers with standard M22 connections.



PART NUMBER	41182
MAX PRESSURE	4000 PSI
ID x LENGTH	1/4" x 25'
MAXTEMP	140° F
INNER MATERIAL	Polyester & Steel-braided
OUTER MATERIAL	Santropene w/ 4" Bend Protectors
ADAPTER	M22 x M22 MNPT
TERMINATED	M22 FNPT x M22 FNPT





STEEL-BRAIDED MONSTER HOSE SERIES WISA



SIMPSON's Monster hose series is designed using dual-braided construction of steel over polyester for high durability. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



	PART NUMBER	41113	41028 (41071)	41030
	MAX PRESSURE	4500 PSI	4500 PSI	4500 PSI
	ID x LENGTH	3/8" x 25'	3/8" x 50'	3/8" x 100'
	MAXTEMP	140° F	140° F	140° F
	INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
B	OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
P	QC FITTINGS	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug
	TERMINATED	Solid MNPT x Solid MNPT	Solid QC Socket & Plug	Solid MNPT x Swivel MNPT

PART NUMBER	41032	41034
MAX PRESSURE	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'
MAXTEMP	140° F	140° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 6" Bend Protectors
QC FITTINGS	QC Socket & Plug	QC Socket & Plug
TERMINATED	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

29 | SIMPSONCLEANING.COM SIMPSONCLEANING.COM | 30 *Excluding the Wrapped Rubber Hose Series. (Comes in retail packaging)

HIGH PERFORMANCE HOSES

LIMITED UMRRANTY SOURCE



ARMOR HOSE™ SERIES **■**USA



The Armor hot water hose is built for high temperature applications up to 250°F and is designed with dual-braided construction of steel over polyester. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



PART NUMBER	41114 (41095)	41096	41115
MAX PRESSURE	4500 PSI	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 50'	3/8" x 100'	3/8" x 200'
MAXTEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
QC FITTINGS	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug
TERMINATED	Solid MNPT x Swivel FNPT	Solid MNPT x Swivel FNPT	Solid MNPT x Swivel FNPT

WRAPPED RUBBER HOSE SERIES

SIMPSON's wrapped rubber hose series features dual-braided construction of steel over polyester and is jacketed with wrapped rubber for high strength, durability and kink resistance. These hoses provide exceptional performance in high temperature applications up to 250°F and pressure ratings from 4,500 to 10,000 PSI.



PART NUMBER	41183	41184	41185
MAX PRESSURE	4500 PSI	8000 PSI	8000 PSI
ID x LENGTH	7 3/8" x 50'	3/8" x 50'	3/8" x 100'
MAX TEMP /	250° F	250° F	250° F
INNER MATERIAL	R1 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 6" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
QC FITTINGS	Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED /	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

PART NUMBER / 41186	41187	41188	41189
MAX PRESSURE 8000 PSI	10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH 3/8" x 200'	3/8" x 50'	3/8" x 100'	3/8" x 200'
MAX TEMP 250° F	250° F	250° F	250° F
INNER MATERIAL R2 Steel-braided	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
QC FITTINGS Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

PART NUMBER / 41190	41191	41192
MAX PRESSURE / 10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH / 1/2" x 50'	1/2" x 100'	1/2" x 200'
MAX TEMP 250° F	250° F	250° F
INNER MATERIAL R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
OC FITTINGS Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

HIGH PERFORMANCE HOSES

LIMITED WARRANTY

JETXTREME™ JETTER HOSE SERIES ■ USA



SIMPSON's Jetxtreme hose series is packed with performance for the toughest of jobs. This hose is constructed with a polyester braided inner tube and a polyurethane, anti-microbial outer jacket that provides added strength and durability. It's one wipe clean feature allows for quick clean up and storage from your jobsite. Designed to handle your hot water jetting needs up to 250°F, the Jetxtreme hose series offers a wide range of PSI performances.



PART NUMBER /	30120	30121
MAX PRESSURE	4000 PSI	4000 PSI
ID x LENGTH	3/8" x 50'	3/8" x 75'
MAXTEMP	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30122	30123	30124	30125
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	7 3/8" x 100'	3/8" x 150'	3/8" x 200'	3/8" x 300'
MAXTEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL /	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	7 Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER / 30170	30171	30172	30173
MAX PRESSURE 3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH 1/4" x 25'	1/4" x 50'	1/4" x 100'	1/4" x 150'
MAXTEMP 250° F	250° F	250° F	250° F
INNER MATERIAL Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30174	30175	30176	30200
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	4000 PSI
ID x LENGTH	1/4" x 200'	1/4" x 250'	1/4" x 300'	1/2" x 50'
MAXTEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT			

(Comes in retail packaging) SIMPSONCLEANING.COM | 32 31 | SIMPSONCLEANING.COM

LIMITED UMARRANTY SOURCE



HIGH PERFORMANCE HOSES

WARRANTY



JETXTREME™ JETTER HOSE SERIES- CONTINUED **SERIES**





PART NUMBER	30201	30202	30203
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 75'	1/2" x 100'	1/2" x 150'
MAXTEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30204	30205	30206
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 200'	1/2" x 5'	1/2" x 400'
MAXTEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

CARPET HOSE SERIES



SIMPSON's carpet cleaning solution hoses are ideal for many commercial cleaning applications. These solution hoses are built with a non-marring bonded jacket and a seamless heat resistant inner tube. Also included are 4-inch bend protectors to prevent harmful twists and breaks during cleaning. This heavy duty hose is flexible, lightweight, and is rated up to 3000 PSI.



PART NUMBER	30110	30111	30113
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8" x 25'	3/8" x 50'	3/8" x 100'
MAX TEMP /	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL /	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30114	30115	30116	30117
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'	1/4" x 250'	1/4" x 300'
MAXTEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT
PART NUMBER	30118	30119	30140	30141
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI

PART NUMBER	30118	30119	30140	30141
MAX PRESSURE /	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	7 3/8" x 40'	3/8" x 24"	1/4" x 25'	1/4" x 50'
MAX TEMP /	7 250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL /	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

CARPET HOSE SERIES- CONTINUED



PART NUMBER	30142	30143	30144
MAX PRESSURE /	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 100'	1/4" x 150'	1/4" x 200'
MAX TEMP /	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL /	Polyurethane	Polyurethane	Polyurethane
TERMINATED /	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER 30145	30146	30155	30156
MAX PRESSURE 3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH 1/4" x 250'	1/4" x 300'	1/4" x 12"	1/4" x 15"
MAX TEMP 250° F	250° F	250° F	250° F
INNER MATERIAL Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER 30157	30158	30159	30160
MAX PRESSURE 3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH 1/4" x 18"	3/8" x 12"	3/8" x 15"	3/8" x 18"
MAX TEMP 250° F	250° F	250° F	250° F
INNER MATERIAL Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED SS Solid MNPT x SS Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30161	30177	30178	30179
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 13"	1/4" x 12"	1/4" x 15"	1/4" x 18"
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT			

PART NUMBER	30207
MAX PRESSURE	3000 PSI
ID x LENGTH	1/4" x 75'
MAXTEMP	250° F
INNER MATERIAL	Polyester braided
OUTER MATERIAL	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT

33 | SIMPSONCLEANING.COM SIMPSONCLEANING.COM | 34

PREMIUM ACCESSORIES

SIMPSON offers a wide variety of premium pressure washer accessories to enhance your cleaning experience. Many accessories are designed to fit most pressure washers, providing more cleaning options for the homeowner and professional to keep you cleaning effectively and efficiently.



DID YOU KNOW?

- You should always replace any worn or broken nozzles as they can potentially be a safety hazard.
- You should always use accessories that are within your pressure washer's PSI range. Always refer to your product user manual for additional details.



PREMIUM ACCESSORIES

GUNS & LANCES

FRONT LOAD SPRAY GUN PART NUMBER 80147 MAX PRESSURE 3400 PSI MAX GPM 8.0 GPM MAX TEMP 140° F INLET - HOSE CONNECT M22 Male OUTLET - LANCE CONNECT M22 Female

360° SWIVEL SIDE ASSIS	T SPRAY GUN		-
PART NUMBER	80148	-0	(1)
MAX PRESSURE	4500 PSI		
MAX GPM	6.6 GPM		
MAX TEMP	140° F		
INLET - HOSE CONNECT	M22 Male w/ 3/8" Female QC plug adapter		
OUTLET - LANCE CONNECT	M22 Female		

HOT WATER SPRAY GUN	
PART NUMBER 80178	
MAX PRESSURE 5075 PSI	
MAX GPM 12.0 GPM	
MAX TEMP 212° F	*INCLUDES BONUS ADAPTERS
INLET - HOSE CONNECT 3/8" FNPT wit	_
OUTLET - LANCE CONNECT / 1/4" FNPT	an note that the

DIAL-N-WASH® ADJUSTABLE PRESSURE REGULATOR

PART NUMBER	82232	
MAX PRESSURE	4500 PSI	
MAX GPM	4.0 GPM	
MAXTEMP	140° F	
INLET -LANCE CONNECT	M22 Female	
OUTLET - GUN CONNECT	M22 Male	

16" SPRAY LANCE

LIMITED

WARRANTY ACCESSORY

PART NUMBER	80149
MAX PRESSURE	3600 PSI
MAX GPM	N/A
MAXTEMP	140° F
INLET-GUN CONNECT	M22 Male
OUTLET -NOZZLE CONNECT	1/4" QC Coupler

31" SPRAY LANCE

PART NUMBER	80479	
MAX PRESSURE	4500 PSI	
MAX GPM	N/A	
MAXTEMP	140° F	
INLET-GUN CONNECT	M22 Male	
OUTLET - NOZZLE CONNECT	1/4" QC Coupler	

48" INSULATED LANCE

PART NUMBER	80179	-
MAX PRESSURE	5000 PSI	
MAX GPM	N/A	
MAXTEMP	212° F	
INLET-GUN CONNECT	1/4" MNPT	
OUTLET -NOZZLE CONNECT	1/4" QC Coupler	

O-RING & FILTER KIT



PART NUMBER	7	80151
TWO FILTERS	7	One Size
TWO O-RING SETS	7	Five Sizes

PART NUMBER

MAX PRESSURE

MAX TEMP

NOZZLE SIZE

LANCE CONNECT

NOZZLES











2.8 - 3.2, SOAP

1/4" QC Plug

35 | SIMPSONCLEANING.COM

PREMIUM ACCESSORIES (CONT.)

OSCILLATING TURBO NOZZLES





/ 1/4" QC Plug	1/4" QC Plug	1/4" QC Plug
Sin		ig 200
80356	80357	80358
/ 5500	5500	5500

PART NUMBER	80356	80357	80358
MAX PRESSURE	5500	5500	5500
MAXTEMP	212° F	212° F	212° F
NOZZLE SIZE	6.0	7.0	8.0
LANCE CONNECT	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug

4.0

HOSE REELS

PART NUMBER

MAX PRESSURE

MAX TEMP

NOZZLE SIZE

LANCE CONNECT



HOSE REELS

PART NUMBER	7	80399	80403
MAX PRESSURE	7/	5000 PSI	5000 PSI
MAXTEMP	7/	212° F	212° F
HOSE CAPACITY	7/	100' x 3/8"	200' x 3/8"
MATERIAL	7	Heavy-duty Steel Construction	Heavy-duty Steel Construction

SURFACE CLEANERS






PART NUMBER	80401
MAX PRESSURE	5000 PSI
MAX TEMP	212° F
HOSE CAPACITY	100' x 3/8" or 125' x 1/4"
MATERIAL	Heavy-duty Steel Construction

20" COMMERCIAL SURFACE CLEANER

PART NUMBER	80182
MAX PRESSURE	4500 PSI
MAXTEMP	212° F
LANCE CONNECT	3/8" Plug
MATERIAL	Heavy-duty ABS
FILTER	High Pressure Inlet



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

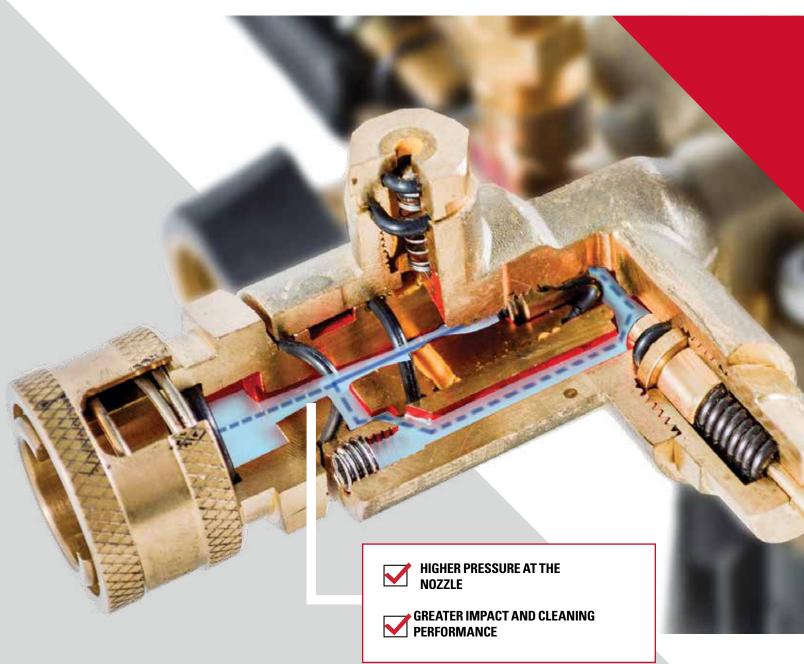

37 | SIMPSONCLEANING.COM SIMPSONCLEANING.COM | 38

OEM TECHNOLOGIESTM **AXIAL CAM PUMP KITS**

VERTICAL



PART NUMBER	90025	90026
MAX PRESSURE	2400 PSI	3000 PSI
MAX GPM	2.0 GPM	2.5 GPM
MANIFOLD	Clear Anodized Aluminum Manifold	Clear Anodized Aluminum Manifold
UNLOADER	Integrated w/ Easy Start Unloader	Integrated w/ Easy Start Unloader
SHAFT SIZE	7/8" Shaft	7/8" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet	Garden Hose Inlet/ M22 Outlet



0		
PART NUMBER	\mathcal{I}	90027
MAX PRESSURE	\mathbb{Z}	3100 PSI
MAX GPM	7/	2.5 GPM
MANIFOLD	$\overline{\mathcal{I}}$	Brass Manifold
UNLOADER	\mathcal{I}	Integrated w/ Easy Start Unloader
SHAFT SIZE	7	7/8" Shaft
THREADING	7	Garden Hose Inlet/ M22 Outlet

LIMITED WARRANTY

1YR SUMP







PART NUMBER	90028
MAX PRESSURE	3200 PSI
MAX GPM	2.4 GPM
MANIFOLD	Clear Anodized Aluminum Manifold
UNLOADER	Integrated w/ Easy Start Unloader
SHAFT SIZE	7/8" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet

HORIZONTAL



-
1111

PART NUMBER	90029
MAX PRESSURE	3100 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated w/ Easy Start Unloader
SHAFT SIZE	7/8" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet

AAATM **AX300 PRO AXIAL PUMP KIT**









	AX300 80059
PART NUMBER	90052
MAX PRESSURE /	3500 PSI
MAX GPM /	2.5 GPM
MANIFOLD /	Brass Manifold
UNLOADER /	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	1" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet

PUMP CARE







15W40 PUMP OIL 80138 16 oz

AAATM **TRIPLEX PUMP KITS**







	C32	C32 8889
PART NUMBER	90036	90037
MAX PRESSURE	3200 PSI	3400 PSI
MAX GPM	2.8 GPM	2.5 GPM
MANIFOLD	Brass Manifold	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	1" Shaft	1" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet	Garden Hose Inlet/ M22 Outlet

All Pump Kits come fully plumbed. Includes:

- Pump
- Mounting hardware (Nuts & Bolts)
- Siphon hose with filter
- Shaft key
- Instruction booklet



	C42 2005F	C42 60057	C42 8005
PART NUMBER	90038	90039	90034
MAX PRESSURE	7 3800 PSI	4400 PSI	4200 PSI
MAX GPM	3.5 GPM	3.3 GPM	4.0 GPM
MANIFOLD /	Brass Manifold	Brass Manifold	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader	Integrated & Adjustable w/ Easy Start Unloader	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	1" Shaft	1" Shaft	1" Shaft
THREADING	Garden Hose Inlet/ QC Outlet	Garden Hose Inlet/ QC Outlet	Garden Hose Inlet/ QC Outlet

INTERESTED IN BECOMING A SIMPSON® DEALER?

Partner with a vertically integrated manufacturer of outdoor power equipment as a SIMPSON® dealer and enjoy the following benefits:

Dedicated Account Representative to help grow your **SIMPSON** business



Access to exclusive sales promotions



Invitations to exclusive **DEALER ONLY** tradeshows and events



View our full library of literature including promotional sales materials



Feel secure with a service network of over **1,250 facilities** in North America



Become your own service center and increase your business



HAVE QUESTIONS?

CONTACT YOUR SALES REPRESENTATIVE AT:

SALES@SIMPSONCLEANING.COM OR

CALL US **1-847-348-1500**

CETA CPC-100 CERTIFIED TESTING STANDARDS



Why choose a CETA Certified product?





PROFESSIONAL MEMBER BASE:

CETA has a membership base of over 200 entities from four different countries representing manufacturers, dealers, service providers, customers/end-users and associates.



TOP INDUSTRY RATINGS:

CETA only allows for products to operate within and no less than 90% of the product rating. This accounts for normal variances within the manufacturing process.



PRECISE TESTING STANDARDS:

CETA certified products are rated based on performance recorded using the **same** nozzle as opposed to utilizing skewed data from different nozzle sizes.



CERTIFIED PERFORMANCE:

The CETA standard provides the end-user with a pressure washer that is certified to perform as intended with any nozzle provided as OEM equipment.

For more information visit https://ceta.org/cpc-100-performance-standard/

41 | SIMPSONCLEANING.COM | 42



DRIVEN BY **PERFORMANCE**TM

Disclaimer of liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information as possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog, also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-847-348-1500 with any concerns.

FC-022420-V2