



Driven by **PERFORMANCE™**

PRODUCT CATALOG

RESIDENTIAL | COMMERCIAL | INDUSTRIAL

PRESSURE WASHERS | MOBILE TRAILERS | PORTABLE GENERATORS & INVERTERS | HOSES | ACCESSORIES | PUMPS



THE SIMPSON® ADVANTAGE

Driven by Performance™ for more than 50 years, SIMPSON continues to provide the advantage you need to get the job done right every time. We design, engineer and manufacture products that are reliable, durable, and built to perform every time you need them. Whether you are a DIYer or an industry pro, SIMPSON offers an enhanced experience with professional results guaranteed. Join the historic journey and take the ADVANTAGE!

TABLE OF CONTENTS

| | |
|-----------------|--|
| PG 3 | RESIDENTIAL PRESSURE WASHERS |
| PG 4 | CLEAN MACHINE® SERIES |
| PG 5 | PREMIUM RESIDENTIAL PRESSURE WASHERS |
| PG 6-7 | MEGASHOT™ SERIES |
| PG 8 | COMMERCIAL PRESSURE WASHERS |
| PG 9 | POWERSHOT™ SERIES |
| PG 10 | PRO SERIES |
| PG 10 | ALUMINUM SERIES |
| PG 11 | ALUMINUM WATER BLASTER® SERIES |
| PG 11 | WATER BLASTER® SERIES |
| PG 12 | INDUSTRIAL PRESSURE WASHERS |
| PG 13 | WATER SHOTGUN® SERIES |
| PG 14 | INDUSTRIAL SERIES |
| PG 14 | RENTAL SERIES |
| PG 15-16 | SANITIZING MISTER |
| PG 17-18 | SUPER PRO ROLL CAGE SERIES |
| PG 19 | HOT WATER PRESSURE WASHERS |
| PG 20 | BRUTE SERIES |
| PG 21-22 | TRAILER MOUNTED PRESSURE WASHERS |
| PG 23-24 | PREMIUM PORTABLE & INVERTER GENERATORS |
| PG 25-26 | COMMERCIAL SERIES |
| PG 27-28 | INDUSTRIAL SERIES |
| PG 29-30 | INVERTER GENERATORS AND PARALLEL BOX |
| PG 31-32 | PREMIUM PORTABLE TRASH PUMPS |
| PG 33-37 | HIGH PERFORMANCE HOSES |
| PG 38 | PROFESSIONAL CLEANING SOLUTIONS |
| PG 39-41 | PREMIUM ACCESSORIES |
| PG 42 | POWERBOOST® & LOW OIL SHUTDOWN TECHNOLOGY |
| PG 43-44 | PRESSURE WASHER PUMP KITS |
| PG 45 | SIMPSON® INFORMATION |
| PG 45 | BECOME A DEALER |
| PG 45 | CETA® TESTING STANDARDS |

RESIDENTIAL PRESSURE WASHERS

The combination of lightweight portable frames, OEM axial cam pumps, and powerful electric motors or gas engines make the residential pressure washers perfect for any cleaning job around the house.

Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)



RESIDENTIAL PRESSURE WASHERS

CLEAN MACHINE® SERIES



BONUS!
Includes on board soap tank

| | |
|------------------|--------------------------------|
| MODEL NUMBER | CM60976(-S) |
| PART NUMBER | 60976 (61016) |
| PRESSURE RATING | 2300 PSI |
| FLOW RATING | 1.2 GPM |
| ENGINE | SIMPSON® 120V Electric Motor |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22 |
| TIRE/WHEEL | 10" Never-flat |
| LIMITED WARRANTY | 1yr Frame, 1yr Pump, 1yr Motor |



| |
|--|
| CM61083-S <small>LOW OIL SHUTDOWN</small> |
| (61083) |
| 3400 PSI |
| 2.5 GPM |
| CRX® 208cc |
| OEM Technologies™ Axial Cam |
| 5/16" x 25' x M22 |
| 10" Premium Pneumatic |
| 5yr Frame, 1yr Pump, 2yr Engine |



| |
|--|
| CM61135(-S) <small>LOW OIL SHUTDOWN</small> |
| (61135) |
| 2800 PSI |
| 2.3 GPM |
| CRX® 163cc |
| OEM Technologies™ Axial Cam |
| 1/4" x 25' x M22, HyFlex™ |
| 12" Never-flat |
| 5yr Frame, 1yr Pump, 2yr Engine |



| |
|--|
| CM61117 <small>LOW OIL SHUTDOWN</small> |
| 61117 |
| 3300 PSI |
| 2.4 GPM |
| KOHLER® SH Series |
| OEM Technologies™ Axial Cam |
| 1/4" x 25' x M22, HyFlex™ |
| 10" Premium Pneumatic |
| 5yr Frame, 1yr Pump, 2yr Engine |

BONUS!
Includes 15" steel surface cleaner



| |
|--|
| CM61118 <small>LOW OIL SHUTDOWN</small> |
| 61118 |
| 3500 PSI |
| 2.5 GPM |
| KOHLER® SH Series |
| AAA® AX300 PRO Axial |
| 5/16" x 25' x M22, MorFlex® |
| 10" Premium Pneumatic |
| 5yr Frame, 2yr Pump, 2yr Engine |

(-S) Indicates shippable packaging.

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.



PREMIUM RESIDENTIAL PRESSURE WASHERS

Designed for the do-it-yourselfer that needs a bit more out of a residential pressure washer, our premium residential pressure washers are ready to take on the toughest home projects.

Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)



PREMIUM RESIDENTIAL PRESSURE WASHERS

MEGASHOT™ SERIES

GAS POWERED



BONUS!
Includes on board
soap tank



| | |
|------------------|---------------------------------|
| MODEL NUMBER | MS60773(-S) |
| PART NUMBER | 60773 (60784) |
| PRESSURE RATING | 2800 PSI |
| FLOW RATING | 2.3 GPM |
| ENGINE | HONDA® GCV160 |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 12" Never-flat |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine |

(-S) Indicates shippable packaging.



| | |
|------------------|---|
| MODEL NUMBER | MS61114(-S) |
| PART NUMBER | 61114 (61114S) |
| PRESSURE RATING | 2800 PSI |
| FLOW RATING | 2.3 GPM |
| ENGINE | KOHLER® XTX675 (Lifetime no oil change) |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, HyFlex™ |
| TIRE/WHEEL | 12" Never-flat |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine |



| | |
|------------------|---------------------------------|
| MODEL NUMBER | MS60809(-S) |
| PART NUMBER | (60809) |
| PRESSURE RATING | 3000 PSI |
| FLOW RATING | 2.4 GPM |
| ENGINE | HONDA® GCV160 |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 12" Never-flat |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine |

BONUS!
Includes 15" steel surface
cleaner & on board soap tank



| | |
|------------------|---------------------------------|
| MODEL NUMBER | MS60805(-S) |
| PART NUMBER | (60808) |
| PRESSURE RATING | 3000 PSI |
| FLOW RATING | 2.4 GPM |
| ENGINE | HONDA® GCV160 |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 12" Never-flat |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine |

(-S) Indicates shippable packaging.

BONUS!
Includes 5-N-1 Nozzle



| | |
|------------------|---|
| MODEL NUMBER | MS61043(-S)* <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 61043 (61066) |
| PRESSURE RATING | 3000 PSI |
| FLOW RATING | 2.4 GPM |
| ENGINE | SIMPSON® 212cc |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 10" Premium Pneumatic |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine |

*Contact a Sales Representative for availability
See page 45 for information.
*49 State Compliant

BONUS!
Includes 5-N-1 Nozzle



| | |
|------------------|---|
| MODEL NUMBER | MS61043(-S)* <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 61106 (61107) |
| PRESSURE RATING | 3000 PSI |
| FLOW RATING | 2.4 GPM |
| ENGINE | SIMPSON® 208cc |
| PUMP | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 10" Premium Pneumatic |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine |

*Contact a Sales Representative for availability
See page 45 for information.
*50 State Compliant

PREMIUM RESIDENTIAL PRESSURE WASHERS

MEGASHOT™ SERIES



| | | | | |
|------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| MODEL NUMBER | MS60763(-S) | MS31025HT | MSH3125-S | MS61049(-S)* |
| PART NUMBER | (60763) | 60652 | 60551 | 61049 (61062) |
| PRESSURE RATING | 3100 PSI | 3200 PSI | 3200 PSI | 3300 PSI |
| FLOW RATING | 2.4 GPM | 2.5 GPM | 2.5 GPM | 2.4 GPM |
| ENGINE | KOHLER® RH265 | HONDA® GC190 | HONDA® GC190 | HONDA® GC190 |
| PUMP | OEM Technologies™ Axial Cam | OEM Technologies™ Axial Cam | OEM Technologies™ Axial Cam | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® | 1/4" x 25' x M22, MorFlex® | 1/4" x 25' x M22, MorFlex® | 1/4" x 35' x M22, MorFlex® |
| TIRE/WHEEL | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine | 5yr Frame, 1yr Pump, 2yr Engine | 5yr Frame, 1yr Pump, 2yr Engine | 5yr Frame, 1yr Pump, 2yr Engine |

*Contact a Sales Representative for availability
See page 45 for information.

BONUS!
Includes 15" steel
surface cleaner



| | | | | |
|------------------|---------------------------------|---------------------------------|---|---|
| MODEL NUMBER | MS61033(-S) | MS60921 | MS61124(-S) <small>LOW OIL SHUTDOWN</small> | MS61084(-S) <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | (61033) | 60921 | 61124 | 61084 (61085) |
| PRESSURE RATING | 3300 PSI | 3300 PSI | 3400 PSI | 3400 PSI |
| FLOW RATING | 2.4 GPM | 2.4 GPM | 2.4 GPM | 2.5 GPM |
| ENGINE | HONDA® GC190 | HONDA® GC190 | KOHLER® SH Series | KOHLER® SH Series |
| PUMP | OEM Technologies™ Axial Cam | OEM Technologies™ Axial Cam | OEM Technologies™ Axial Cam | OEM Technologies™ Axial Cam |
| HOSE | 1/4" x 25' x M22, MorFlex® | 1/4" x 25' x M22, MorFlex® | 5/16" x 35' x M22, MorFlex® | 5/16" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic |
| LIMITED WARRANTY | 5yr Frame, 1yr Pump, 2yr Engine | 5yr Frame, 1yr Pump, 2yr Engine | 5yr Frame, 1yr Pump, 3yr Engine | 5yr Frame, 1yr Pump, 2yr Engine |

(-S) Indicates shippable packaging.

COMMERCIAL PRESSURE WASHERS



Our commercial pressure washers are perfect for professionals who take on jobs a bit larger than the ones found around the house.



Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)

COMMERCIAL PRESSURE WASHERS

POWERSHOT™ SERIES



BONUS!
Includes 15" steel
surface cleaner



| | | | | |
|------------------|---|--|--|--|
| MODEL NUMBER | PS3228-S <small>LOW OIL SHUTDOWN</small> | PS61002(-S) <small>LOW OIL SHUTDOWN</small> | PS61115(-S) <small>LOW OIL SHUTDOWN</small> | PS60995(-S) <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 60629 | 61002 (61014) | 61115 | 60995 (60996) |
| PRESSURE RATING | 3300 PSI | 3500 PSI | 3500 PSI | 3600 PSI |
| FLOW RATING | 2.5 GPM | 2.5 GPM | 2.5 GPM | 2.5 GPM |
| ENGINE | HONDA® GX200 | HONDA® GX200 | KOHLER® SH Series | HONDA® GX200 |
| PUMP | AAA® Triplex | AAA® AX300 Axial Cam | AAA® AX300 Axial Cam | AAA® Triplex |
| HOSE | 5/16" x 25' x M22, MorFlex® | 5/16" x 25' x M22, MorFlex® | 5/16" x 25' x M22, MorFlex® | 5/16" x 25' x M22, MorFlex® |
| TIRE/WHEEL | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 2yr Pump, 3yr Engine | 10yr Frame, 2yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine |

COMMERCIAL PRESSURE WASHERS

PRO SERIES



| | | | | |
|------------------|---|---|--|--|
| MODEL NUMBER | PS61044(-S) <small>POWER BOOST</small> | PS61042 <small>POWER BOOST</small> | PS60982(-S) <small>POWER BOOST LOW OIL SHUTDOWN</small> | PS60918 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 61044 (61064) | 61042 | 60982 (61000) | 60918 |
| PRESSURE RATING | 3400 PSI | 3400 PSI | 3700 PSI | 4000 PSI |
| FLOW RATING | 2.3 GPM | 2.5 GPM | 2.5 GPM | 3.5 GPM |
| ENGINE | HONDA® GS190 | BRIGGS & STRATTON® CRX950 | HONDA® GX200 | HONDA® GX270 |
| PUMP | AAA® AX300 PRO Axial | AAA® AX300 PRO Axial | AAA® Triplex | AAA® Triplex |
| HOSE | 5/16" x 25' x M22, MorFlex® | 5/16" x 25' x M22, MorFlex® | 5/16" x 50' x M22, MorFlex® | 3/8" x 50' x QC, Steel-braided Monster |
| TIRE/WHEEL | 10" Premium Pneumatic | 10" Premium Pneumatic | 10" Premium Pneumatic | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3+2yr Engine | 10yr Frame, 5yr Pump, 3+2yr Engine | 10yr Frame, 5yr Pump, 3+2yr Engine | 10yr Frame, 5yr Pump, 3+2yr Engine |

ALUMINUM SERIES



| | | | |
|------------------|--|---|--|
| MODEL NUMBER | PS60869 <small>LOW OIL SHUTDOWN</small> | PS4240 <small>LOW OIL SHUTDOWN</small> | PS60843 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 60869 | 60456 | 60843 |
| PRESSURE RATING | 4000 PSI | 4200 PSI | 4400 PSI |
| FLOW RATING | 3.5 GPM | 4.0 GPM | 4.0 GPM |
| ENGINE | HONDA® GX270 | HONDA® GX390 | SIMPSON® 420cc |
| PUMP | AAA® Triplex | AAA® Triplex | AAA® Triplex |
| HOSE | 3/8" x 50' x QC, Steel-braided Monster | 3/8" x 50' x QC, Steel-braided Monster | 3/8" x 50' x QC, Steel-braided Monster |
| TIRE/WHEEL | 13" Premium Pneumatic | 13" Premium Pneumatic | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine |

| | | | |
|------------------|--|--|--|
| MODEL NUMBER | ALH3228-S <small>LOW OIL SHUTDOWN</small> | ALH3425-S <small>LOW OIL SHUTDOWN</small> | ALH4240 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 60735 | 60689 | 60688 |
| PRESSURE RATING | 3400 PSI | 3600 PSI | 4200 PSI |
| FLOW RATING | 2.5 GPM | 2.5 GPM | 4.0 GPM |
| ENGINE | HONDA® GX200 | HONDA® GX200 | HONDA® GX390 |
| PUMP | CAT PUMPS® Triplex | AAA® Triplex | CAT PUMPS® Triplex |
| HOSE | 5/16" x 25' x QC, Steel-braided Monster | 5/16" x 35' x M22, MorFlex® | 3/8" x 50' x QC, Steel-braided Monster |
| TIRE/WHEEL | 10" Premium Pneumatic | 10" Premium Pneumatic | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine |

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

POWER BOOST - Indicates pump equipped with PowerBoost® Technology. See page 42 for details.
(-S) Indicates shippable packaging.

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

POWER BOOST - Indicates pump equipped with PowerBoost® Technology. See page 42 for details.
(-S) Indicates shippable packaging.

COMMERCIAL PRESSURE WASHERS

ALUMINUM WATER BLASTER® SERIES

GAS POWERED



LIGHTWEIGHT ALUMINUM FRAME!

LIGHTWEIGHT ALUMINUM FRAME!

LIGHTWEIGHT ALUMINUM FRAME!



| | | | |
|------------------|---|---|---|
| MODEL NUMBER | ALWB60827 <small>LOW OIL SHUTDOWN</small> | ALWB60828 <small>LOW OIL SHUTDOWN</small> | ALWB60825 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 60827 | 60828 | 60825 |
| PRESSURE RATING | 4200 PSI | 4200 PSI | 4400 PSI |
| FLOW RATING | 4.0 GPM | 4.0 GPM | 4.0 GPM |
| ENGINE | HONDA® GX390 | HONDA® GX390 | SIMPSON® 420cc |
| PUMP | AAA® Triplex | CAT PUMPS® Triplex | AAA® Triplex |
| HOSE | 3/8" x 50' x QC, Steel-braided Monster | 3/8" x 50' x QC, Steel-braided Monster | 3/8" x 50' x QC, Steel-braided Monster |
| TIRE/WHEEL | 13" Premium Pneumatic | 13" Premium Pneumatic | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine |

WATER BLASTER® SERIES

GAS POWERED



| | | |
|------------------|--|---|
| MODEL NUMBER | WB4200 <small>LOW OIL SHUTDOWN</small> | WB60824 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 60205 | 60824 |
| PRESSURE RATING | 4200 PSI | 4400 PSI |
| FLOW RATING | 4.0 GPM | 4.0 GPM |
| ENGINE | HONDA® GX390 | SIMPSON® 420cc |
| PUMP | AAA® Triplex | AAA® Triplex |
| HOSE | 3/8" x 50' x QC, Steel-braided Monster | 3/8" x 50' x QC, Steel-braided Monster |
| TIRE/WHEEL | 13" Premium Pneumatic | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine | 10yr Frame, 5yr Pump, 3yr Engine |

INDUSTRIAL PRESSURE WASHERS



Featuring high-performance, industrial-grade pumps and welded robust steel frames, these machines are built to take on the toughest industrial jobs.



Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)





INDUSTRIAL PERFORMANCE

- **FEATURING HIGH PERFORMANCE, AAA™ OR COMET INDUSTRIAL GRADE PUMPS.**
- **EQUIPPED WITH A BOLT-ON EXTERNAL UNLOADER AND BYPASS HOSE.**
- **DURABLE HEAVY GAUGE FRAME DESIGN.**



WATER SHOTGUN® SERIES



Includes external fuel tank

| | | |
|------------------|------------------------------------|------------------------------------|
| MODEL NUMBER | WS4050V | WS5050H |
| PART NUMBER | 60242 | 60243 |
| PRESSURE RATING | 4000 PSI | 5000 PSI |
| FLOW RATING | 5.0 GPM | 5.0 GPM |
| ENGINE | VANGUARD® V-Twin / E-Start | HONDA® GX630 / E-Start |
| PUMP | COMET Premium Series | COMET Premium Series |
| HOSE | 3/8" x 50' x QC, R2 Wrapped Rubber | 3/8" x 50' x QC, R2 Wrapped Rubber |
| TIRE/WHEEL | 13" Premium Aluminum | 13" Premium Aluminum |
| LIMITED WARRANTY | 10yr Frame, 7yr Pump, 3yr Engine | 10yr Frame, 7yr Pump, 3yr Engine |

*Battery not included. Requires 12V Garden tractor battery type U1. *Battery not included. Requires 12V Garden tractor battery type U1.

INDUSTRIAL PRESSURE WASHERS



INDUSTRIAL SERIES



LOW OIL SHUTDOWN - Featured on all units (Excludes electric and HONDA® GC models). See page 42 for details.



61129



61023



61026



61030



| MODEL NUMBER | PART NUMBER | PRESSURE RATING | FLOW RATING | DRIVE | ENGINE/MOTOR | PUMP | TIRE/WHEEL | HOSE | LIMITED WARRANTY |
|----------------------|-------------|-----------------|-------------|--------|----------------|--------------------------|-----------------|---|------------------------------------|
| IS61129 | 61129 | 1500 PSI | 2.0 GPM | DIRECT | 120V ELECTRIC | AAA® Industrial Triplex | N/A- HANDHELD | 5/16" x 25' x QC, Steel-braided Monster | 5yr Pump, 1yr Motor |
| IS61023 ¹ | 61023 | 2700 PSI | 2.7 GPM | DIRECT | HONDA® GC190 | AAA® AX300 PRO Axial | 10" Foam Filled | 5/16" x 50' x QC, Steel-braided Monster | 10yr Frame, 3yr Pump, 2yr Engine |
| IS61022 ¹ | 61022 | 3000 PSI | 2.7 GPM | DIRECT | HONDA® GX200 | AAA® AX300 PRO Axial | 10" Foam Filled | 5/16" x 50' x QC, Steel-braided Monster | 10yr Frame, 3yr Pump, 3+2yr Engine |
| IS61024 ² | 61024 | 3000 PSI | 3.0 GPM | DIRECT | HONDA® GX200 | AAA® Industrial Triplex | 10" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3+2yr Engine |
| IS61026 ² | 61026 | 3500 PSI | 4.0 GPM | DIRECT | HONDA® GX270 | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3+2yr Engine |
| IS61028 ² | 61028 | 4400 PSI | 4.0 GPM | DIRECT | HONDA® GX390 | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3+2yr Engine |
| IS61029 ² | 61029 | 4400 PSI | 4.0 GPM | DIRECT | SIMPSON® 420cc | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3+2yr Engine |
| IS61030 ² | 61030 | 4200 PSI | 4.0 GPM | BELT | HONDA® GX390 | COMET Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3+2yr Engine |

¹Black welded heavy gauge steel frame, powdered coated for corrosion resistance.

²Ultra lightweight aircraft grade aluminum frame.



RENTAL SERIES



FEATURING:

- Steel dashboards with set up/use instructions
- Gas and 230V electric units with heavy-duty aluminum frames
- Gas and 230V electric units have bolt-on external unloader and bypass hose
- Digital hour meter
- Heavy-duty inlet filter
- Engine vibration dampeners
- Professional grade insulated trigger gun and lance



61094



61095



61096

LOW OIL SHUTDOWN - Featured on all units (Excludes electric models). See page 42 for details.

| MODEL NUMBER | PART NUMBER | PRESSURE RATING | FLOW RATING | DRIVE | ENGINE/MOTOR | PUMP | TIRE/WHEEL | HOSE | LIMITED WARRANTY |
|--------------|-------------|-----------------|-------------|--------|----------------|-------------------------|-----------------|--|----------------------------------|
| IR61094 | 61094 | 1500 PSI | 2.0 GPM | DIRECT | 120V ELECTRIC | AAA® Industrial Triplex | 8" Never-Flats | 3/8" x 25' x QC, Steel-braided Monster | 5yr Frame, 5yr Pump, 1yr Motor |
| IR61130 | 61130 | 2000 PSI | 3.0 GPM | DIRECT | 230V ELECTRIC | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 1yr Motor |
| IR61131 | 61131 | 2500 PSI | 3.5 GPM | DIRECT | 230V ELECTRIC | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 1yr Motor |
| IR61132 | 61132 | 3000 PSI | 4.0 GPM | DIRECT | 230V ELECTRIC | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 1yr Motor |
| IR61143 | 61143 | 2700 PSI | 3.0 GPM | DIRECT | HONDA® GX200 | AAA® Industrial Triplex | 10" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3yr Engine |
| IR61095 | 61095 | 3000 PSI | 3.0 GPM | DIRECT | HONDA® GX200 | AAA® Industrial Triplex | 10" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3yr Engine |
| IR61133 | 61133 | 3500 PSI | 4.0 GPM | DIRECT | HONDA® GX270 | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3yr Engine |
| IR61134 | 61134 | 4400 PSI | 4.0 GPM | DIRECT | SIMPSON® 420cc | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3yr Engine |
| IR61096 | 61096 | 4400 PSI | 4.0 GPM | DIRECT | HONDA® GX390 | AAA® Industrial Triplex | 13" Foam Filled | 3/8" x 50' x QC, Steel-braided Monster | 10yr Frame, 7yr Pump, 3yr Engine |

INTRODUCING THE SM1200 ALL IN ONE

Sanitizing Mister and Pressure Washing System



VERSATILE: The new Simpson SM1200 provides misting and powerful pressure washing all-in-one machine.

PORTABLE: The small, lightweight design is easy to maneuver and transport, so you can use the SM1200 inside or out.

POWERFUL: With its powerful self-priming supply pump, the SM1200 can draw water or chemicals vertically up to 5 feet.

PROFESSIONAL MISTING NOZZLE



WITH QC PLUG

SELF-PRIMING SUPPLY PUMP



ELECTRIC INDUCTION MOTOR



DUAL-ACTION METERING VALVE



AAA™ INDUSTRIAL TRIPLEX PUMP



HIGH PRESSURE/ CHEMICAL HOSE



*PRODUCT IMAGES MAY VARY SLIGHTLY FROM THE PRODUCT YOU RECEIVE. PLEASE CONTACT YOUR SALES REPRESENTATIVE FOR QUESTIONS ON YOUR PRODUCT.

- ✓ **PROFESSIONAL MISTING NOZZLE:** Designed to deliver a uniform mist resulting in an outstanding disinfecting application
- ✓ **SELF-PRIMING SUPPLY PUMP:** Allows the SM1200 to draw water or chemicals vertically up to 5 feet through its large 3/8" supply hose (Included)
- ✓ **ELECTRIC INDUCTION MOTOR:** 1.6 horsepower, 120-volt, 35 foot power cord with GFCI is designed to operate from any standard 15-amp outlet
- ✓ **DUAL-ACTION METERING VALVE:** Allows the user to quickly switch between misting and pressure washing modes
- ✓ **AAA™ INDUSTRIAL TRIPLEX PUMP:** Designed to deliver top performance
- ✓ **HIGH PRESSURE/CHEMICAL HOSE:** The 75 foot high pressure hose is designed to handle a wide variety of cleaning and sanitation chemicals for misting and high pressure washing

| | |
|------------------|---|
| MODEL NUMBER | SM1200 |
| PART NUMBER | 61102 |
| PRESSURE RATING | 1200 PSI |
| FLOW RATING | 2.0 GPM |
| ENGINE | 120V MOTOR |
| PUMP | AAA™ Triplex + Self-Priming Supply Pump |
| HOSE | 1/4" x 75' x QC, High Pressure/5' Supply Hose |
| TIRE/WHEEL | 10" Never-Flat |
| LIMITED WARRANTY | 5yr Frame, 5yr Pump, 4yr Self Priming Pump, 1yr Motor |



DESIGNED FOR INTERIOR & EXTERIOR USE

HEALTH CARE

- Hospitals
- Medical & Dental Offices
- Pharmacies
- Ambulances

VETERINARY

- Animal Kennels
- Animal Transportation Vehicles & Units
- Examination & Surgery Rooms

STADIUMS & ARENAS

- Sport Complexes
- Concert Halls
- Amphitheaters

FOOD PROCESSING & HANDLING

- Restaurants
- Cafeterias & Kitchens
- Refrigerated Storage Units
- Food Processing Plants

FARMING & AGRICULTURE

- Animal Pens
- Egg & Meat Processing Facilities
- Fleet Equipment

MAINTENANCE & HOSPITALITY

- Hotels & Guest Services
- Fitness Center & Pools
- Guest Rooms
- Banquet Halls & Conference Rooms
- Lobbies & Bars

EDUCATION

- Schools & Daycare Facilities
- Play Grounds & Equipment
- Cafeterias
- Desks & Chairs
- Bathrooms

GROCERY & RETAIL

- Food Markets
- Department Stores
- Clothing & Specialty Shops
- Barber Shops & Salons

FITNESS FACILITIES

- Gyms & Locker Rooms
- Weight Lifting Equipment
- Aerobic & Equipment
- Spas/Saunas & Tanning Rooms
- Showers
- Water Fountains

PUBLIC TRANSPORTATION

- Buses & Trains
- Planes & Helicopters
- Boats & Ferries
- Ships & Cruise lines
- Rental Cars & Facilities

MANUFACTURING FACILITIES

- Material Handling Plants
- Packaging Facilities
- Warehouse & Distribution Centers

| Included with SM1200 (61102) | Additional Accessories | Optional Dual Misting Kit (# 88256) |
|---|--|-------------------------------------|
| 75' High-Pressure Chemical Hose x1 | 75' High-Pressure Chemical Hose x1 (#30208) | Three-Way Hose Adapter x1 |
| Pressure Washer Spray Gun x1 | Dedicated Misting Spray Gun x1 (# 88257) | 75' High-Pressure Chemical Hose x1 |
| 16" Steel Wand x1 | 31" Spray Wand (# 80479) | Dedicated Misting Spray Gun x1 |
| 4-Piece QC Nozzle x1 | Misting Nozzle with QC (#88258) | |
| QC Misting Nozzle x1 | Misting Nozzle with MNPT Connection (#88259) | |
| 5' Supply Hose x1 | Three-Way Hose Adapter (#88260) | |
| Dedicated spray gun and misting nozzle with QC hose connection x1 | | |

INDUSTRIAL PRESSURE WASHERS

SUPER PRO ROLL CAGE SERIES

GAS POWERED



65200
SMALL
31" x 24.25" x 28.25"

HEAVY DUTY
HOSE REELS
AVAILABLE

SOLD SEPARATELY. SEE NEXT PAGE
FOR DETAILS OR PAGE 41.



65208
MEDIUM
42" x 36.25" x 33.5"



65228
LARGE
47.5" x 29.5" x 38.5"
Large external fuel tank
for extended run time.



INDUSTRIAL PRESSURE WASHERS

SUPER PRO ROLL CAGE SERIES

GAS POWERED



LOW OIL SHUTDOWN - Featured on all units (Excludes 65228). See page 42 for details.

| MODEL NUMBER | PART NUMBER | PRESSURE RATING | FLOW RATING | DRIVE | ENGINE | PUMP | TIRE/WHEEL | HOSE | LIMITED WARRANTY |
|--------------|-------------|-----------------|-------------|--------|----------------|-------------------------|-----------------------|---------------------------------|----------------------------------|
| SMALL | | | | | | | | | |
| SW3625HADS | 65200 | 3600 PSI | 2.5 GPM | DIRECT | HONDA® GX200 | AAA® Industrial Triplex | 10" Premium Pneumatic | 5/16" x 25' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| SW3625SADS | 65202 | 3600 PSI | 2.5 GPM | DIRECT | SIMPSON® 208cc | AAA® Industrial Triplex | 10" Premium Pneumatic | 5/16" x 25' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| MEDIUM | | | | | | | | | |
| SW4035HADM | 65203 | 4000 PSI | 3.5 GPM | DIRECT | HONDA® GX270 | AAA® Industrial Triplex | 10" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| SW4440HCDM | 65206 | 4400 PSI | 4.0 GPM | DIRECT | HONDA® GX390 | AAA® Industrial Triplex | 10" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| SW4440SCDM | 65208 | 4400 PSI | 4.0 GPM | DIRECT | SIMPSON® 420cc | AAA® Industrial Triplex | 10" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| SW4440HCBM | 65209 | 4200 PSI | 4.0 GPM | BELT | HONDA® GX390 | AAA® Industrial Triplex | 10" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| SW4440SCBDM | 65211 | 4400 PSI | 4.0 GPM | BELT | SIMPSON® 420cc | AAA® Industrial Triplex | 10" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 5yr Pump, 3yr Engine |
| LARGE | | | | | | | | | |
| SW3080HUGL | 65217* | 3000 PSI | 8.0 GPM | GEAR | HONDA® GX690 | UDOR Industrial Triplex | 13" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 7yr Pump, 3yr Engine |
| SW4060SUGL | 65219* | 4000 PSI | 6.0 GPM | GEAR | SIMPSON® 680cc | UDOR Industrial Triplex | 13" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 7yr Pump, 3yr Engine |
| SW5050HCGL | 65227* | 5000 PSI | 5.0 GPM | GEAR | HONDA® GX690 | UDOR Industrial Triplex | 13" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 7yr Pump, 3yr Engine |
| SW7040KCGL | 65228* | 7000 PSI | 4.0 GPM | GEAR | KOHLER® CH750 | UDOR Industrial Triplex | 13" Premium Pneumatic | 3/8" x 50' x QC, Steel Braided | 10yr Frame, 7yr Pump, 3yr Engine |

*Battery not included. Requires 12V Garden tractor battery type U1.

HOSE REELS

ALSO LISTED IN ACCESSORIES
SECTION ON PAGE 41.



| PART NUMBER | 80399 | 80490 | 80403 | 80401 |
|---------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| MAX PRESSURE | 5000 PSI | 5000 PSI | 5000 PSI | 5000 PSI |
| MAX TEMP | 212° F | 212° F | 212° F | 212° F |
| HOSE CAPACITY | 100' x 3/8" or 125' x 1/4" | 100' x 3/8" or 125' x 1/4" | 200' x 3/8" or 250' x 1/4" | 100' x 3/8" or 125' x 1/4" |
| MATERIAL | Heavy-duty Steel Construction | Heavy-duty Steel Construction | Heavy-duty Steel Construction | Heavy-duty Steel Construction |

*Does not have Hose Reel Guide

HOSE REEL INSTALLATION KITS

ALL INSTALLATION KITS COME COMPLETE WITH JUMPER HOSES & HARDWARE. INSTALLATION KITS MUST BE PURCHASED IN ORDER FOR HOSE REEL TO BE CONNECTED TO UNIT.

| PART # | 80381 | 80382 | 80383 |
|-------------|----------------------------|-----------------------------------|---------------------------------|
| DESCRIPTION | Roll Cage low pressure kit | Small Roll Cage high pressure kit | M/L Roll Cage high pressure kit |

HIGH-PERFORMANCE
INDUSTRIAL FEATURES



High & low pressure mountable hose reels available. (Sold separately)



Premium SIMPSON®, HONDA® or KOHLER® engines for powerful performance.



Strong steel lifting points for quick crane lifting and reinforced welded design with solid wheel axle for easy forklift transfer. On small and medium models ONLY.



Bolt-on external unloader with bypass hose provides durability for extended pump life.



Four wheel, heavy gauge 1.5" steel frame design with a wheel locking brake system.



HOT WATER PRESSURE WASHERS

Removing heavy grease, oil, salt, and algae can be a tough job but SIMPSON's hot water line is up to the task. With sizes ranging from the Mini Brute to the Super Brute, there is a SIMPSON hot-water machine ready to take on the toughest jobs no matter how big or small.



Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)



HOT WATER PRESSURE WASHERS BRUTE SERIES



GAS POWERED



ELECTRIC INDUCTION MOTOR



MINI BRUTE^{1,3}

| | |
|----------------------|---------------------------------|
| MODEL NUMBER | MB1518 |
| PART NUMBER | 60363 |
| PRESSURE RATING | 1500 PSI |
| FLOW RATING | 1.8 GPM |
| ENGINE/MOTOR | 120V Electric |
| PUMP | AAA® Triplex |
| ENGINE FUEL CAPACITY | N/A |
| BURNER FUEL CAPACITY | 4.0 gal Diesel |
| DRIVE | Direct Drive |
| START | Electric |
| TIRE/ WHEEL | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 1yr Motor |



KING BRUTE

| | |
|----------------------|----------------------------------|
| MODEL NUMBER | KB3028 |
| PART NUMBER | 65100 |
| PRESSURE RATING | 3000 PSI |
| FLOW RATING | 2.8 GPM |
| ENGINE/MOTOR | BRIGGS & STRATTON® OHV 1100 |
| PUMP | CAT PUMPS® Industrial Triplex |
| ENGINE FUEL CAPACITY | .75 gal Gasoline |
| BURNER FUEL CAPACITY | 5.0 gal Diesel |
| DRIVE | Direct Drive |
| START | Recoil |
| TIRE/ WHEEL | 13" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 2yr Engine |



BIG BRUTE^{2,3}

| | |
|----------------------|---|
| MODEL NUMBER | BB65106 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 65106 |
| PRESSURE RATING | 4000 PSI |
| FLOW RATING | 4.0 GPM |
| ENGINE/MOTOR | HONDA® GX390 |
| PUMP | COMET Industrial Triplex |
| ENGINE FUEL CAPACITY | 5.5 gal Gasoline |
| BURNER FUEL CAPACITY | 10 gal Diesel |
| DRIVE | Direct Drive |
| START | Recoil/ E-Start |
| TIRE/ WHEEL | 10" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine |



BIG BRUTE^{2,3}

| | |
|----------------------|---|
| MODEL NUMBER | BB65105 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 65105 |
| PRESSURE RATING | 4000 PSI |
| FLOW RATING | 4.0 GPM |
| ENGINE/MOTOR | VANGUARD® V-Twin |
| PUMP | COMET Industrial Triplex |
| ENGINE FUEL CAPACITY | 5.5 gal Gasoline |
| BURNER FUEL CAPACITY | 10 gal Diesel |
| DRIVE | Direct Drive |
| START | E-Start |
| TIRE/ WHEEL | 10" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine |



BIG BRUTE^{2,3}

| | |
|----------------------|---|
| MODEL NUMBER | BB65108 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 65108 |
| PRESSURE RATING | 4000 PSI |
| FLOW RATING | 4.0 GPM |
| ENGINE/MOTOR | VANGUARD® V-Twin |
| PUMP | UDOR Industrial Triplex |
| ENGINE FUEL CAPACITY | 5.5 gal Gasoline |
| BURNER FUEL CAPACITY | 10 gal Diesel |
| DRIVE | Gear Drive |
| START | E-Start |
| TIRE/ WHEEL | 10" Premium Pneumatic |
| LIMITED WARRANTY | 10yr Frame, 7yr Pump, 3yr Engine |



SUPER BRUTE^{2,3}

| | |
|----------------------|---|
| MODEL NUMBER | SB3555 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 65110 |
| PRESSURE RATING | 3500 PSI |
| FLOW RATING | 5.5 GPM |
| ENGINE/MOTOR | VANGUARD® 570cc |
| PUMP | COMET Premium Series Industrial Triplex |
| ENGINE FUEL CAPACITY | 8.75 gal Gasoline |
| BURNER FUEL CAPACITY | 8.75 gal Diesel |
| DRIVE | Belt Drive |
| START | E-Start |
| TIRE/ WHEEL | Forklift Feet / Permanent Mount |
| LIMITED WARRANTY | 10yr Frame, 7yr Pump, 3yr Engine |

65110

SUPER BRUTE^{2,3}

| | |
|----------------------|--|
| MODEL NUMBER | SB4066 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 65115 |
| PRESSURE RATING | 4000 PSI |
| FLOW RATING | 6.6 GPM |
| ENGINE/MOTOR | SIMPSON® 679cc |
| PUMP | UDOR Industrial Triplex |
| ENGINE FUEL CAPACITY | 8.75 gal Gasoline |
| BURNER FUEL CAPACITY | 8.75 gal Diesel |
| DRIVE | Gear Box |
| START | E-Start |
| TIRE/ WHEEL | Forklift Feet / Permanent Mount |
| LIMITED WARRANTY | 10yr Frame, 7yr Pump, 3yr Engine |



65110

SUPER BRUTE^{2,3}

| | |
|----------------------|---|
| MODEL NUMBER | SB65123 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 65123 |
| PRESSURE RATING | 3500 PSI |
| FLOW RATING | 5.5 GPM |
| ENGINE/MOTOR | HONDA® GX630 |
| PUMP | General Pump® |
| ENGINE FUEL CAPACITY | 8.75 gal Gasoline |
| BURNER FUEL CAPACITY | 8.75 gal Diesel |
| DRIVE | Belt Drive |
| START | E-Start |
| TIRE/ WHEEL | Forklift Feet / Permanent Mount |
| LIMITED WARRANTY | 10yr Frame, 5yr Pump, 3yr Engine |

¹MINI BRUTE includes a 15 amp high limit switch and 35' GFCI cord; not pictured.
²Battery not included on E-Start units. Requires 12V Garden tractor battery Type U1.
³All Brute series models come standard with gun, lance, hose and nozzles.

Contact a Sales Representative for more details. See page 45 for information.
LOW OIL SHUTDOWN Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

TRAILER MOUNTED PRESSURE WASHERS



SIMPSON's mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailers, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.

MOBILE TRAILER PRESSURE WASHERS



GAS POWERED



- ☒ CUSTOM SUPERIOR CRAFTSMANSHIP
- ☒ THICK WALL RECTANGULAR STEEL TUBING



95001



95003



95006

| | STAGE 1A COLD WATER | | STAGE 1B COLD WATER | | | | STAGE 1C HOT WATER | |
|-------------------------|--|---|---|---|---|-------------------------------------|-------------------------------------|--|
| MODEL NUMBER | 95000 | 95001 | 95002 | 95003* | 95004* | 95005* | 95006* | |
| PRESSURE RATING | 3200 PSI | 3800 PSI | 4200 PSI | 4200 PSI | 4200 PSI | 4000 PSI | 4000 PSI | |
| FLOW RATING | 2.8 GPM | 3.5 GPM | 4.0 GPM | 4.0 GPM | 4.0 GPM | 4.0 GPM | 4.0 GPM | |
| ENGINE | HONDA® GX200 | HONDA® GX270 | HONDA® GX390 | HONDA® GX390 w/ Recoil & E-Start | VANGUARD V-TWIN w/ E-Start | HONDA® GX390 w/ Recoil & E-Start | VANGUARD V-TWIN w/ E-Start | |
| PUMP | CAT PUMPS® Triplex | CAT PUMPS® Triplex | CAT PUMPS® Triplex | CAT PUMPS® Triplex | CAT PUMPS® Triplex | COMET Triplex | COMET Triplex | |
| TRAILER SIZE | 7' Overall (4' x 4' Platform) | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform) | 9' Overall (4' x 5.5' Platform) | |
| TRAILER FRAME | Rectangular thick wall steel tubing | Rectangular thick wall steel tubing | Rectangular thick wall steel tubing | Rectangular thick wall steel tubing | Rectangular thick wall steel tubing | Rectangular thick wall steel tubing | Rectangular thick wall steel tubing | |
| AXLE RATING | 2000 lbs | 2000 lbs | 2000 lbs | 2000 lbs | 2000 lbs | 3500 lbs | 3500 lbs | |
| TIRE | 12" 6-Ply | 12" 6-Ply | 12" 6-Ply | 12" 6-Ply | 12" 6-Ply | 13" 6-Ply | 13" 6-Ply | |
| LIGHTING | LED | LED | LED | LED | LED | LED | LED | |
| TRAILER HITCH BALL SIZE | 2" Ball | 2" Ball | 2" Ball | 2" Ball | 2" Ball | 2" Ball | 2" Ball | |
| WATER TANK SIZE | 100 Gal | 150 Gal | 150 Gal | 150 Gal | 150 Gal | 200 Gal | 200 Gal | |
| HIGH PRESSURE HOSE | 3/8" x 50' Steel-braided Monster w/ QC | 3/8" x 100' Steel-braided Monster w/ QC | 3/8" x 100' Steel-braided Monster w/ QC | 3/8" x 100' Steel-braided Monster w/ QC | 3/8" x 100' Steel-braided Monster w/ QC | 3/8" x 100' Armor Hose™ w/ QC | 3/8" x 100' Armor Hose™ w/ QC | |
| HIGH PRESSURE HOSE REEL | 100' | 100' | 100' | 100' | 100' | 100' | 100' | |
| SUPPLY HOSE | N/A | N/A | N/A | N/A | N/A | 3/4" x 75' | 3/4" x 75' | |
| SUPPLY HOSE REEL | N/A | N/A | N/A | N/A | N/A | Standard | Standard | |
| LIMITED WARRANTY | 1yr Frame, 5yr Pump, 3yr Engine | 1yr Frame, 5yr Pump, 3yr Engine | 1yr Frame, 5yr Pump, 3yr Engine | 1yr Frame, 5yr Pump, 3yr Engine | 1yr Frame, 5yr Pump, 3yr Engine | 1yr Frame, 5yr Pump, 3yr Engine | 1yr Frame, 5yr Pump, 3yr Engine | |

LOW OIL SHUTDOWN Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

95004 Comes with external fuel tank. *Battery not included. Requires 12V Garden tractor battery type U1.



PREMIUM PORTABLE & INVERTER GENERATORS



Powershot™ portable and inverter generators by Simpson® are engineered to provide power in even the toughest weather conditions. Reliable and easy to use, Powershot™ portable and inverter generators are ideal for back-up power, tailgate parties, construction sites and or any other outdoor event where and when power is needed most.



POWERED by
SIMPSON HONDA
SIMPSONCLEANING.COM | 24

PREMIUM GENERATORS
COMMERCIAL SERIES



| | | | |
|---------------------|--------------------------------|--------------------------------|--------------------------------|
| MODEL NUMBER | SPG3640 | SPG3645 | SPG5568 |
| PART NUMBER | 70062 | 70005 | 70006 |
| STARTING WATTS | 4500 | 4500 | 6875 |
| RUNNING WATTS* | 3600 | 3600 | 5500 |
| AC VOLTAGE | 120V | 120V | 120/240V |
| AC FREQUENCY | 60 Hz | 60 Hz | 60 Hz |
| ENGINE | SIMPSON® OHV | SIMPSON® OHV | SIMPSON® OHV |
| DISPLACEMENT | 224cc | 224cc | 420cc |
| VOLTAGE REGULATION | Automatic | Automatic | Automatic |
| START | Recoil | Recoil | Recoil |
| FUEL CAPACITY | 3.4 gal Gasoline | 3.4 gal Gasoline | 6.1 gal Gasoline |
| TIRE/WHEEL | N/A | 8" Never-flat | 9" Never-flat |
| DIMENSIONS | 27" x 23.1" x 20" | 28.7"x 21.6" x 22.8" | 31.1"x 21.6" x 23.8" |
| WEIGHT | 101.4 lb | 117.94 lb | 194 lb |
| RUN TIME- 50% LOAD | 8 Hours | 8 Hours | 9 Hours |
| dBA- 25% LOAD @ 7M+ | 71 | 72 | 79 |
| LIMITED WARRANTY** | 3yr Residential, 6m Commercial | 3yr Residential, 6m Commercial | 3yr Residential, 6m Commercial |

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

GENERATOR PANEL CONFIGURATIONS*:

SPG3640



SPG3645



SPG5568



SPG7085E



SPG7593E



SPG8310E



PREMIUM GENERATORS
COMMERCIAL SERIES



| | | | |
|---------------------|--------------------------------|--------------------------------|--------------------------------|
| MODEL NUMBER | SPG7085E | SPG7593E | SPG8310E |
| PART NUMBER | 70010 | 70007 | 70008 |
| STARTING WATTS | 8500 | 9375 | 10000 |
| RUNNING WATTS* | 7000 | 7500 | 8300 |
| AC VOLTAGE | 120/240V | 120/240V | 120/240V |
| AC FREQUENCY | 60Hz | 60 Hz | 60 Hz |
| ENGINE | HONDA® GX390 | SIMPSON® OHV | SIMPSON® OHV |
| DISPLACEMENT | 389cc | 420cc | 439cc |
| VOLTAGE REGULATION | Automatic | Automatic | Automatic |
| START | Recoil/E-Start | Recoil/E-Start | Recoil/E-Start |
| FUEL CAPACITY | 6.1 gal Gasoline | 6.1 gal Gasoline | 6.1 gal Gasoline |
| TIRE/WHEEL | 9" Never-flat | 9" Never-flat | 9" Never-flat |
| DIMENSIONS | 31.1" x 21.6" x 23.8" | 31.1" x 21.6" x 23.8" | 31.1" x 21.6" x 23.8" |
| WEIGHT | 191.8 lb | 209.4 lb | 220 lb |
| RUN TIME- 50% LOAD | 8 Hours | 8 Hours | 8 Hours |
| dBA- 25% LOAD @ 7M+ | 74 | 76 | 78 |
| LIMITED WARRANTY** | 3yr Residential, 6m Commercial | 3yr Residential, 6m Commercial | 3yr Residential, 6m Commercial |

Battery not included. Uses 12V-14AH battery.

Battery not included. Uses 12V-14AH battery.

Battery not included. Uses 12V-14AH battery.

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

DISCOVER YOUR POWER NEEDS.
SIZING YOUR GENERATOR

- 1 Select the devices you wish to run at the same time
- 2 List any starting watts required by your devices
- 3 Add up the running watts of all of your devices
- 4 Add the HIGHEST starting watt listed to the total running watts required by your devices

| DEVICE | STARTING WATTS | RUNNING WATTS | RECOMMENDED SIZE |
|-----------------------|----------------|---------------|---|
| LIGHT BULB | N/A | 100 | MINIMUM AMOUNT OF STARTING WATTS NEEDED ON YOUR GENERATOR |
| REFRIGERATOR/ FREEZER | 2200 | 700 | |
| CELL PHONE CHARGER | N/A | 25 | |
| TOTAL | 2200 | 825 | |
| | | | 3025 |

High altitude carburator kits and USDA Forestry approved spark areorters available, but not included.

*Generator per PGMA (Portable Generator Manufactures’ Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

**See Operator’s Manual for complete warranty details.

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

PREMIUM GENERATORS

INDUSTRIAL SERIES

LIFTING HOOK
Equipped with a strong steel lifting hook for quick crane lifting and easy job site transfer

EASY ACCESS CONTROL PANEL
Equipped with run time indicator

WELDED WHEEL BARROW LIFTING HANDLE
For stable maneuvering and easy mobility across a variety of terrains

PREMIUM HONDA® ENGINES
Equipped with low oil shutdown to protect engine and extend product life

V-MOUNT VIBRATION ISOLATION SYSTEM
Extends generator life

UL LISTED RECEPTACLES
GFCI outlets standard on all models for use in OSHA safe work environments

WATERPROOF OUTLET COVERS
Provides safety and durable protection for all receptacles

HIGH-QUALITY 100% COPPER-WOUND BRUSHLESS ALTERNATOR
Provides reliable, low THD power that is safe for use on sensitive devices

PREMIUM NEVER-FLAT WHEELS
Provide easy maneuverability across various types of terrain

AUTO IDLE DOWN
Reduces noise and saves fuel

HEAVY-DUTY WELDED STEEL FRAME WITH POWDER COATED FINISH
Provides durability and corrosion resistance



| | | | |
|---------------------|----------------|----------------|------------------|
| MODEL NUMBER | SCGH5500 | SCGH8500 | SCGH8500E |
| PART NUMBER | 70053 | 70054 | 70055 |
| STARTING WATTS | 5500 | 8500 | 8500 |
| RUNNING WATTS* | 4500 | 7000 | 7000 |
| AC VOLTAGE | 120V/240V | 120V/240V | 120V/240V |
| AC FREQUENCY | 60 Hz | 60 Hz | 60 Hz |
| ENGINE | HONDA® GX270 | HONDA® GX390 | HONDA® GX390 |
| DISPLACEMENT | 270cc | 389cc | 389cc |
| VOLTAGE REGULATION | Automatic | Automatic | Automatic |
| START | Recoil | Recoil | Recoil/ E-Start* |
| FUEL CAPACITY | 7.9 gal | 7.9 gal | 7.9 gal |
| TIRE/WHEEL | 9" Never-flat | 9" Never-flat | 9" Never-flat |
| RUN TIME- 50% LOAD | 17 | 12 | 12 |
| dBA- 25% LOAD @ 7M+ | 72 | 74 | 74 |
| LIMITED WARRANTY** | 3yr Commercial | 3yr Commercial | 3yr Commercial |


Please contact a Sales Representative for more details
See page 45 for information.

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

SCGH5500

(NEMA L5-20R)
2x 120V GFCI

(NEMA L14-30R)
1x 120V



SCGH8500

(NEMA L5-20R)
2x 120V GFCI

(NEMA L5-30R)
1x 120V

(NEMA L14-30R)
1x 120/240V




SCGH8500E

(NEMA L5-20R)
2x 120V GFCI

(NEMA L5-30R)
1x 120V

(NEMA L14-30R)
1x 120/240V



 - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

DEVICE WATTAGES

HEATING & COOLING

| DEVICE | STARTING WATTS | RUNNING WATTS |
|----------------------------|----------------|---------------|
| 10,000 BTU CENTRAL AC¹ | 3000 | 1500 |
| 24,000 BTU CENTRAL AC¹ | 4950 | 3800 |
| 1/2 HP FURNACE FAN BLOWER¹ | 2300 | 875 |
| 1/3 HP FURNACE FAN BLOWER¹ | 1400 | 700 |
| HEAT PUMP | 4500 | 4700 |
| 13 GAL HUMIDIFIER | - | 175 |
| SPACE HEATER | - | 1800 |
| 10,000 BTU WINDOW AC | 1800 | 1200 |
| 12,000 BTU WINDOW AC | 3950 | 3250 |

RESIDENTIAL

| DEVICE | STARTING WATTS | RUNNING WATTS |
|---------------------------|----------------|---------------|
| COFFEE MAKER | - | 1750 |
| ELECTRIC DRYER | 1800 | 5750 |
| ELECTRIC RANGE | - | 1500/ELEMENT |
| ELECTRIC WATER HEATER | 1000 | 2000 |
| 1/2 HP GARAGE DOOR OPENER | 2350 | 500-875 |
| 1250 WATT HAIR DRYER | - | 1250 |
| 100 WATT LIGHT BULB | - | 100 |
| 1000 WATT MICROWAVE | - | 1000 |
| REFRIGERATOR/ FREEZER | 2200 | 700 |
| SECURITY SYSTEM | - | 500 |
| 1/2 HP SUMP PUMP | 2150 | 800-1050 |
| 1/3 HP SUMP PUMP | 1300 | 800 |
| TELEVISION | - | 200-500 |
| TOASTER | - | 1200-1650 |
| WASHING MACHINE | 2300 | 1150 |
| 1/2 HP WELL PUMP | 2100 | 1000 |
| 1/3 HP WELL PUMP | 1400 | 750 |

¹Wattages listed are approximated, always check appliances for actual figures.

High altitude carburator kits and USDA Forestry approved spark arreoters available, but not included.

*Generator per PGMA (Portable Generator Manufactures’ Association) standard
ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

**See Operator’s Manual for complete warranty details.

RECREATIONAL

| DEVICE | STARTING WATTS | RUNNING WATTS |
|---------------------------|----------------|---------------|
| AM/ FM RADIO | - | 100 |
| BLENDER | 450 | 400 |
| 20" BOX FAN | - | 200 |
| CD/ DVD PLAYER | - | 100 |
| CELLPHONE BATTERY CHARGER | - | 25 |
| COLOR TV | - | 200-500 |
| ELECTRIC GRILL | - | 1650 |
| INFLATER PUMP | 150 | 50 |
| OUTDOOR LIGHT STRING | - | 250 |
| 13,500 BTU RV AC | 700 | 1500 |
| SLOW COOKER | - | 250 |

LANDSCAPING

| DEVICE | STARTING WATTS | RUNNING WATTS |
|----------------------------|----------------|---------------|
| ELECTRIC HEDGE TRIMMER | - | 400 |
| ELECTRIC LAWN MOWER | - | 1200 |
| 9" ELECTRIC LINE TRIMMER | - | 350-500 |
| 1/2 HP 12" ELEC. CHAIN SAW | - | 900-1220 |

WORK SITE

| DEVICE | STARTING WATTS | RUNNING WATTS |
|------------------------------|----------------|---------------|
| 1HP AIR COMPRESSOR | 4500 | 2000 |
| 1/2 HP AIR COMPRESSOR | 2000 | 1400 |
| 1/3 HP AIRLESS PAINT SPRAYER | 1200 | 600 |
| 3" BELT SANDER | 2400 | 1200 |
| 8" BENCH GRINDER | 1100 | 1400 |
| 6 1/2" CIRCULAR SAW | 2300 | 800-1000 |
| 1/2" HAND DRILL | 900 | 600 |
| 3/8" HAND DRILL | 600 | 400 |
| 10" MITER SAW/TABLE SAW | 2100 | 840 |
| QUARTZ HALOGEN WORK LAMP | - | 1000 |
| RECIPROCATING SAW | - | 960 |

AMP UP WITH PORTABLE POWER



INVERTER GENERATOR AND PARALLEL BOX ACCESSORY



NOW WITH GFCI PROTECTION!
70061



RV PLUG ADAPTER INCLUDED!
70059



RV PLUG ADAPTER INCLUDED!
70063

| | | | |
|---------------------|---|---|--|
| MODEL NUMBER | SIG2218 | SIG3632 | SIG4540 |
| PART NUMBER | 70061 | 70059 | 70063 |
| STARTING WATTS | 2200 | 3600 | 4500 |
| RUNNING WATTS* | 1800 | 3200 | 4000 |
| AC VOLTAGE | 120V | 120V | 120V |
| AC FREQUENCY | 60 Hz | 60 Hz | 60 Hz |
| ENGINE | SIMPSON® | SIMPSON® | SIMPSON® |
| START | Recoil | Recoil / Electric | Recoil / Electric |
| FUEL CAPACITY | 1.2 gal Gasoline | 1.5 gal Gasoline | 2.4 gal Gasoline |
| RUN TIME- 25% LOAD | 10 Hour | 9 Hour | 9 Hour |
| dBA- 25% LOAD @ 7M+ | 53 | 67 | 69 |
| OUTLET TYPE | 120V Duplex (5-20R) GFCI 12V DC Automotive | 120V (5-30R) 120V Duplex (5-20R) GFCI 12V DC Automotive | 120V (TT-30R) RV Outlet 120V Duplex (5-20R) GFCI 12V DC Automotive |
| LIMITED WARRANTY** | 3yr Consumer, 1yr Commercial | 3yr Consumer, 1yr Commercial Battery Included | 3yr Consumer, 1yr Commercial Battery Included |

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

PARALLEL BOX ACCESSORY

| | |
|------------------|----------------|
| MODEL NUMBER | SIG22PK |
| PART NUMBER | 80442 |
| AMPS | 30 |
| LIMITED WARRANTY | 90 Days |

The SIG22PK parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators rated up to 3300 running watts.

Inverter generators and parallel box sold separately.

High altitude carburetor kits available but not included.

*Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

**See Operator's Manual for complete warranty details.



PREMIUM PORTABLE TRASH PUMPS

Engineered to handle water containing mud, sand, leaves, twigs, and other contaminants, SIMPSON's trash water pumps are perfect for clearing floodwater and wastewater from residential, municipal, and industrial sites. Easy to transport, use, and clean, SIMPSON's trash water pumps will get the job done no matter where you need them.

Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)

PREMIUM PORTABLE TRASH PUMPS

POWERSHOT™ SERIES

GAS POWERED



| | |
|-----------------------|---|
| MODEL NUMBER | S8TP02 <small>LOW OIL SHUTDOWN</small> |
| PART NUMBER | 71006 |
| ENGINE | KOHLER® SH270 |
| START | Recoil |
| FLOW RATE | 158 GPM |
| INLET/OUTLET DIAMETER | 2" |
| FUEL TANK CAPACITY | 2.5 gal |
| SUCTION HEAD LIFT | 25' |
| TOTAL HEAD LIFT | 95' |
| LIMITED WARRANTY | 3yr |

| |
|---|
| S8TP03 <small>LOW OIL SHUTDOWN</small> |
| 71003 |
| HONDA® GX200 |
| Recoil |
| 285 GPM |
| 3" |
| 2.5 gal |
| 25' |
| 95' |
| 3yr |

FEATURES

PUMP HOUSING MATERIAL = DIE CAST ALUMINUM

MECHANICAL SEAL MATERIAL = SILICON CARBIDE

IMPELLER MATERIAL = CAST IRON

INCLUDES

HOSE CLAMPS (X3)

HOSE BARBS (X2)

HOSE NUTS (X2)

GASKETS (X2)

STRAINER ATTACHMENT (X1)


STRAINER (X1)

TOOL KIT



LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.



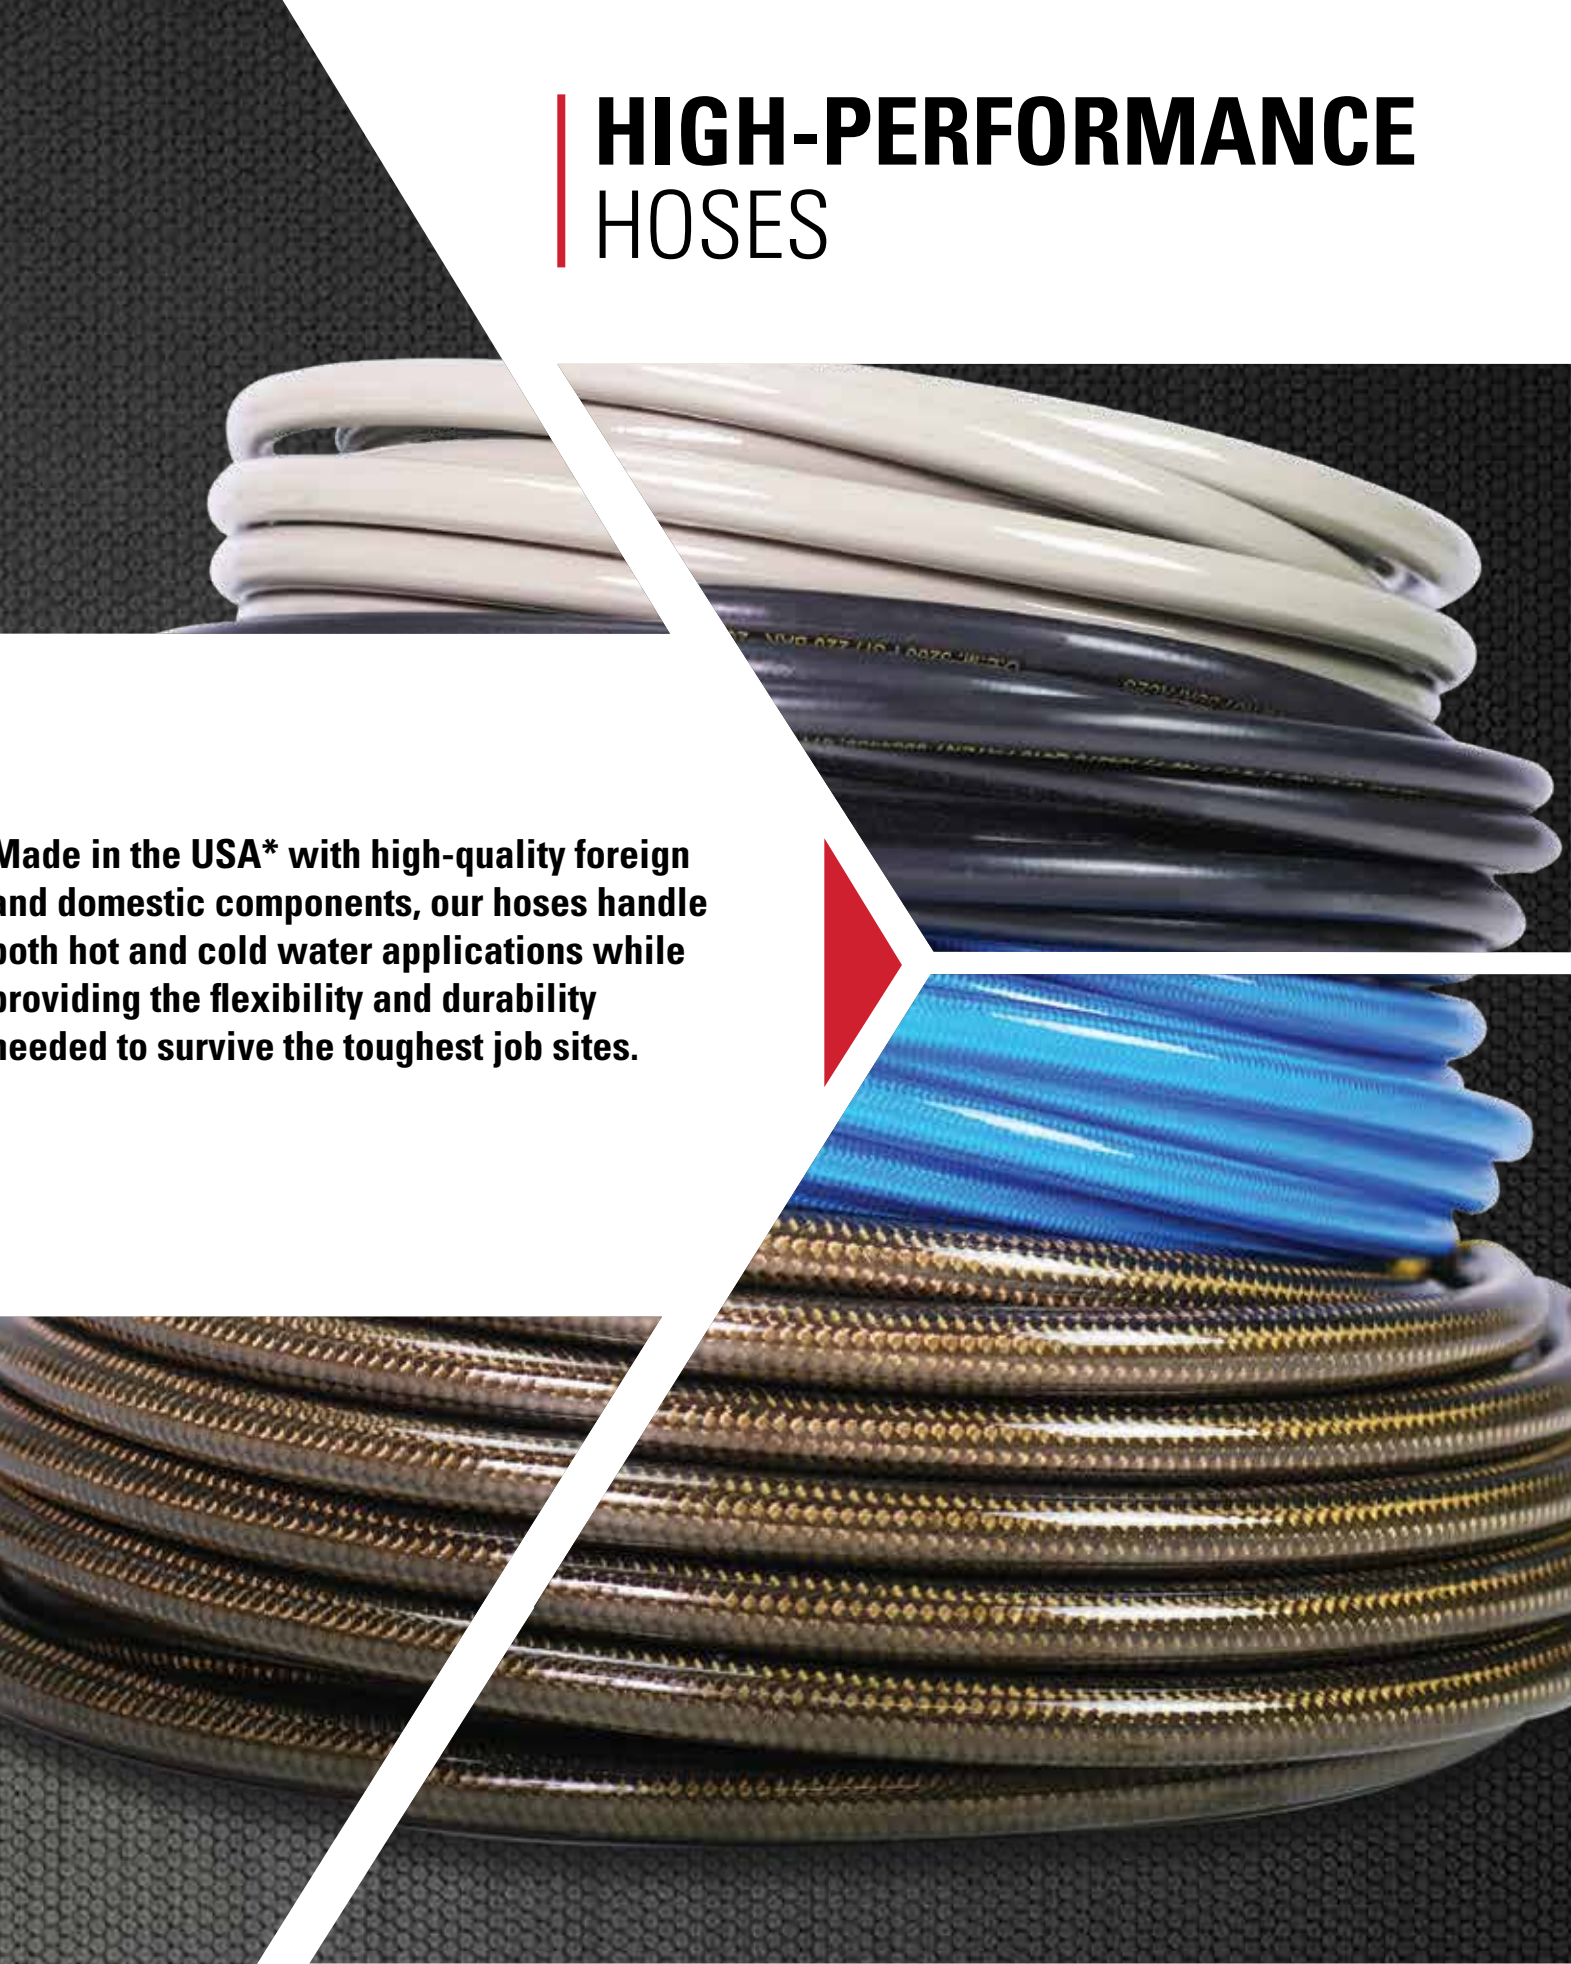

Made in the USA* with high-quality foreign and domestic components, our hoses handle both hot and cold water applications while providing the flexibility and durability needed to survive the toughest job sites.



*Excluding the Wrapped Rubber Hose Series.

HIGH PERFORMANCE HOSES



LIMITED
WARRANTY



MORFLEX® HOSE SERIES



SIMPSON's MorFlex technology is used for high flexibility and kink resistance. It has a lightweight polyester braid for easy handling and a polyurethane outer jacket that is non-marring and abrasion-resistant. MorFlex hoses are equipped with threaded M22 connections with a dual o-ring design to fit most gas and electric pressure washers with standard M22 connections. M22 x M22 adapter included.



| | | | |
|----------------|------------------------------------|------------------------------------|------------------------------------|
| PART NUMBER | 40224 (41107) | 40225 (41108) | 40226 (41109) |
| MAX PRESSURE | 3300 PSI | 3700 PSI | 3700 PSI |
| ID x LENGTH | 1/4" x 25' | 5/16" x 25' | 5/16" x 50' |
| MAX TEMP | 140° F | 140° F | 140° F |
| INNER MATERIAL | Polyester | Polyester | Polyester |
| OUTER MATERIAL | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors |
| FITTINGS | M22 FNPT x M22 FNPT | M22 FNPT x M22 FNPT | M22 FNPT x M22 FNPT |

SANTOPRENE™ HOSE



SIMPSON's Santoprene cold water hose delivers extended hose life. This polyester and steel-braided, abrasion resistant hose is designed to fit most gas and electric pressure washers with standard M22 connections. M22 x M22 adapter included.



| | |
|----------------|----------------------------------|
| PART NUMBER | 41182 |
| MAX PRESSURE | 4000 PSI |
| ID x LENGTH | 1/4" x 25' |
| MAX TEMP | 140° F |
| INNER MATERIAL | Polyester & Steel-braided |
| OUTER MATERIAL | Santoprene w/ 4" Bend Protectors |
| FITTINGS | M22 FNPT x M22 FNPT |

M22 ADAPTER INCLUDED
WITH MORFLEX® & SANTOPRENE™ HOSES
USED TO CONNECT MULTIPLE HOSES WITH STANDARD M22 CONNECTIONS



STEEL-BRAIDED MONSTER HOSE SERIES



SIMPSON's Monster hose series is designed using dual-braided construction of steel over polyester for high durability. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



| | | | |
|----------------|------------------------------------|------------------------------------|------------------------------------|
| PART NUMBER | 41113 | 41028 (41071) | 41030 |
| MAX PRESSURE | 4500 PSI | 4500 PSI | 4500 PSI |
| ID x LENGTH | 3/8" x 25' | 3/8" x 50' | 3/8" x 100' |
| MAX TEMP | 140° F | 140° F | 140° F |
| INNER MATERIAL | Polyester & Steel-braided | Polyester & Steel-braided | Polyester & Steel-braided |
| OUTER MATERIAL | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors |
| FITTINGS | QC Socket & Plug | QC Socket & Plug | QC Socket & Plug |

| | | |
|----------------|------------------------------------|------------------------------------|
| PART NUMBER | 41032 | 41034 |
| MAX PRESSURE | 4500 PSI | 4500 PSI |
| ID x LENGTH | 3/8" x 150' | 3/8" x 200' |
| MAX TEMP | 140° F | 140° F |
| INNER MATERIAL | Polyester & Steel-braided | Polyester & Steel-braided |
| OUTER MATERIAL | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors |
| FITTINGS | QC Socket & Plug | QC Socket & Plug |

(Comes in retail packaging)

HIGH PERFORMANCE HOSES



LIMITED
WARRANTY



ARMOR HOSE™ SERIES



The Armor hot water hose is built for high temperature applications up to 250°F and is designed with dual-braided construction of steel over polyester. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



| | | | |
|----------------|------------------------------------|------------------------------------|------------------------------------|
| PART NUMBER | 41114 (41095) | 41096 | 41115 |
| MAX PRESSURE | 4500 PSI | 4500 PSI | 4500 PSI |
| ID x LENGTH | 3/8" x 50' | 3/8" x 100' | 3/8" x 200' |
| MAX TEMP | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester & Steel-braided | Polyester & Steel-braided | Polyester & Steel-braided |
| OUTER MATERIAL | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors | Polyurethane w/ 4" Bend Protectors |
| FITTINGS | QC Socket & Plug | QC Socket & Plug | QC Socket & Plug |

WRAPPED RUBBER HOSE SERIES

SIMPSON's wrapped rubber hose series features dual-braided construction of steel over polyester and is jacketed with wrapped rubber for high strength, durability and kink resistance. These hoses provide exceptional performance in high temperature applications up to 250°F and pressure ratings from 4,500 to 10,000 PSI.



| | | | |
|----------------|--------------------------------------|---------------------------------------|---------------------------------------|
| PART NUMBER | 41183 | 41184 | 41185 |
| MAX PRESSURE | 4500 PSI | 8000 PSI | 8000 PSI |
| ID x LENGTH | 3/8" x 50' | 3/8" x 50' | 3/8" x 100' |
| MAX TEMP | 250° F | 250° F | 250° F |
| INNER MATERIAL | R1 Steel-braided | R2 Steel-braided | R2 Steel-braided |
| OUTER MATERIAL | Wrapped Rubber w/ 6" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors |
| FITTINGS | Steel QC w/ Plug | Stainless Steel QC w/ Plug | Stainless Steel QC w/ Plug |

| | | | | |
|----------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| PART NUMBER | 41186 | 41187 | 41188 | 41189 |
| MAX PRESSURE | 8000 PSI | 10,000 PSI | 10,000 PSI | 10,000 PSI |
| ID x LENGTH | 3/8" x 200' | 3/8" x 50' | 3/8" x 100' | 3/8" x 200' |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | R2 Steel-braided | R2 Steel-braided | R2 Steel-braided | R2 Steel-braided |
| OUTER MATERIAL | Wrapped Rubber w/ 24" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors |
| FITTINGS | Stainless Steel QC w/ Plug | Stainless Steel QC w/ Plug | Stainless Steel QC w/ Plug | Stainless Steel QC w/ Plug |

| | | | |
|----------------|---------------------------------------|---------------------------------------|---------------------------------------|
| PART NUMBER | 41190 | 41191 | 41192 |
| MAX PRESSURE | 10,000 PSI | 10,000 PSI | 10,000 PSI |
| ID x LENGTH | 1/2" x 50' | 1/2" x 100' | 1/2" x 200' |
| MAX TEMP | 250° F | 250° F | 250° F |
| INNER MATERIAL | R2 Steel-braided | R2 Steel-braided | R2 Steel-braided |
| OUTER MATERIAL | Wrapped Rubber w/ 24" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors | Wrapped Rubber w/ 24" Bend Protectors |
| FITTINGS | Stainless Steel QC w/ Plug | Stainless Steel QC w/ Plug | Stainless Steel QC w/ Plug |

HIGH PERFORMANCE HOSES



LIMITED
WARRANTY



JETXTREME™ JETTER HOSE SERIES



SIMPSON's Jetxtreme hose series is packed with performance for the toughest of jobs. This hose is constructed with a polyester braided inner tube and a polyurethane, anti-microbial outer jacket that provides added strength and durability. It's one wipe clean feature allows for quick clean up and storage from your job site. Designed to handle your hot water jetting needs up to 250°F, the Jetxtreme hose series offers a wide range of PSI performances.



| | | | |
|----------------|-------------------------|-------------------------|-------------------------|
| PART NUMBER | 30120 | 30121 | 30122 |
| MAX PRESSURE | 4000 PSI | 4000 PSI | 4000 PSI |
| ID x LENGTH | 3/8" x 50' | 3/8" x 75' | 3/8" x 100' |
| MAX TEMP | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT |

| | | | | |
|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| PART NUMBER | 30123 | 30124 | 30125 | 30170 |
| MAX PRESSURE | 4000 PSI | 4000 PSI | 4000 PSI | 3000 PSI |
| ID x LENGTH | 3/8" x 150' | 3/8" x 200' | 3/8" x 300' | 1/4" x 25' |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT |

| | | | | |
|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| PART NUMBER | 30171 | 30172 | 30173 | 30174 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 1/4" x 50' | 1/4" x 100' | 1/4" x 150' | 1/4" x 200' |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT |

| | | | | |
|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| PART NUMBER | 30175 | 30176 | 30200 | 30201 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 4000 PSI | 4000 PSI |
| ID x LENGTH | 1/4" x 250' | 1/4" x 300' | 1/2" x 50' | 1/2" x 75' |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT |

| | | | | |
|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| PART NUMBER | 30202 | 30203 | 30204 | 30205 |
| MAX PRESSURE | 4000 PSI | 4000 PSI | 4000 PSI | 4000 PSI |
| ID x LENGTH | 1/2" x 100' | 1/2" x 150' | 1/2" x 200' | 1/2" x 5' |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT | Solid MNPT x Solid MNPT |

| | |
|----------------|-------------------------|
| PART NUMBER | 30206 |
| MAX PRESSURE | 4000 PSI |
| ID x LENGTH | 1/2" x 400' |
| MAX TEMP | 250° F |
| INNER MATERIAL | Polyester braided |
| OUTER MATERIAL | Polyurethane |
| FITTINGS | Solid MNPT x Solid MNPT |

HIGH PERFORMANCE HOSES



CARPET HOSE SERIES



LIMITED
WARRANTY



SIMPSON’s carpet cleaning solution hoses are ideal for many commercial cleaning applications. These solution hoses are built with a non-marring bonded jacket and a seamless heat resistant inner tube. Also included are 4-inch bend protectors to prevent harmful twists and breaks during cleaning. This heavy duty hose is flexible, lightweight, and is rated up to 3000 PSI.



| | | | |
|----------------|-------------------------------|-------------------------------|-------------------------------|
| PART NUMBER | 30210 | 30211 | 30213 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 3/8” x 25’ | 3/8” x 50’ | 3/8” x 100’ |
| MAX TEMP | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT |

| | | | | |
|----------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| PART NUMBER | 30214 | 30215 | 30218 | 30219 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 3/8” x 150’ | 3/8” x 200’ | 3/8” x 40’ | 3/8” x 24” |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT |

| | | | | |
|----------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| PART NUMBER | 30140 | 30141 | 30142 | 30143 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 1/4” x 25’ | 1/4” x 50’ | 1/4” x 100’ | 1/4” x 150’ |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT |

| | | | | |
|----------------|-------------------------------|---|---|---|
| PART NUMBER | 30144 | 30145 | 30146 | 30155 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 1/4” x 200’ | 1/4” x 250’ | 1/4” x 300’ | 1/4” x 12” |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | SS Solid MNPT x SS Solid MNPT | SS Heavy-duty MNPT x SS Heavy-duty MNPT | SS Heavy-duty MNPT x SS Heavy-duty MNPT | Steel Solid 1/4” MNPT x Steel Solid 1/4” MNPT |

| | | | | |
|----------------|---|---|-------------------------------|-------------------------------|
| PART NUMBER | 30156 | 30157 | 30258 | 30259 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 1/4” x 15” | 1/4” x 18” | 3/8” x 12” | 3/8” x 15” |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | Steel Solid 1/4” MNPT x Steel Solid 1/4” MNPT | Steel Solid 1/4” MNPT x Steel Solid 1/4” MNPT | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT |

| | | | | |
|----------------|-------------------------------|-------------------------------|---|---|
| PART NUMBER | 30260 | 30161 | 30177 | 30178 |
| MAX PRESSURE | 3000 PSI | 3000 PSI | 3000 PSI | 3000 PSI |
| ID x LENGTH | 3/8” x 18” | 1/4” x 13” | 1/4” x 12” | 1/4” x 15” |
| MAX TEMP | 250° F | 250° F | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| FITTINGS | SS Solid MNPT x SS Solid MNPT | SS Solid MNPT x SS Solid MNPT | Steel Solid 3/8” MNPT x Steel Solid 3/8” MNPT | Steel Solid 3/8” MNPT x Steel Solid 3/8” MNPT |

| | | |
|----------------|---|---|
| PART NUMBER | 30179 | 30207 |
| MAX PRESSURE | 3000 PSI | 3000 PSI |
| ID x LENGTH | 1/4” x 18” | 1/4” x 75’ |
| MAX TEMP | 250° F | 250° F |
| INNER MATERIAL | Polyester braided | Polyester braided |
| OUTER MATERIAL | Polyurethane | Polyurethane |
| FITTINGS | Steel Solid 3/8” MNPT x Steel Solid 3/8” MNPT | Steel Solid 3/8” MNPT x Steel Solid 3/8” MNPT |

VITAL OXIDE

PROFESSIONAL GRADE CLEANING

Vital Oxide is an EPA registered hospital disinfectant cleaner, mold killer and super effective odor eliminator. Ready to use with no mixing required, just spray, wipe or fog right from the bottle. Non-irritating to the skin and non-corrosive to treated articles.

VITAL OXIDE IN ACTION:

- *Used in emergency response to eliminate Norovirus out-breaks.*
- *Clinical trials have shown a decrease of 95% in Health-care Associated Infections (HAI’S) of Acinetobacter spp in hospital environment.*
- *Used in disaster response to eliminate mold and mildew from flood damage.*
- *University and government sponsored studies document long-term effectiveness on mold and mold spores, even eliminating mold spores.*

| MODEL NUMBER | CONTENTS AMOUNT |
|--------------|-----------------|
| 82245 | 5 GALLON PAIL |
| 82246* | 15 GALLON DRUM |
| 82247* | 55 GALLON DRUM |
| 82248* | 261 GALLON TOTE |

*Shipping times vary due to availability. Contact your sales rep for more information



CLEANING DETERGENT

PROFESSIONAL GRADE CLEANING

SIMPSON® pressure washer cleaners are specifically formulated to enhance your pressure washer’s performance. Featuring different formulas, multi- purpose, heavy-duty, and biodegradable, SIMPSON® cleaners will help cut through tough grease, power away stains, and easily remove mold and mildew on the jobsite and at home.

FOR USE ON MULTIPLE SURFACES:

- *DECK, FENCE & PATIO*
- *BRICK, SIDING & CONCRETE*
- *CARS, TRUCKS, BIKES & RVs*
- *OUTDOOR FURNITURE*



MULTI-PURPOSE



HEAVY-DUTY



NATURAL GREEN FORMULA

| | | | |
|----------------|---------------|---------------|---------------|
| PART NUMBER | 88289 (88281) | 88290 (88282) | 88291 (88283) |
| CONTENT AMOUNT | 1 Gallon | 1 Gallon | 1 Gallon |

PREMIUM ACCESSORIES

SIMPSON® offers a wide variety of premium pressure washer accessories to enhance your cleaning experience. Many accessories are designed to fit most pressure washers, providing more cleaning options for the homeowner and professional to keep you cleaning effectively and efficiently.



PREMIUM ACCESSORIES

LIMITED WARRANTY

GUNS & LANCES

FRONT LOAD SPRAY GUN

| | |
|------------------------|------------|
| PART NUMBER | 80147 |
| MAX PRESSURE | 3400 PSI |
| MAX GPM | 8.0 GPM |
| MAX TEMP | 140° F |
| INLET - HOSE CONNECT | M22 Male |
| OUTLET - LANCE CONNECT | M22 Female |



360° SWIVEL SIDE ASSIST SPRAY GUN

| | |
|------------------------|---|
| PART NUMBER | 80148 |
| MAX PRESSURE | 4500 PSI |
| MAX GPM | 6.6 GPM |
| MAX TEMP | 140° F |
| INLET - HOSE CONNECT | M22 Male w/ 3/8" Female QC plug adapter |
| OUTLET - LANCE CONNECT | M22 Female |



HOT WATER SPRAY GUN

| | |
|------------------------|--------------------------|
| PART NUMBER | 80178 |
| MAX PRESSURE | 5075 PSI |
| MAX GPM | 12.0 GPM |
| MAX TEMP | 212° F |
| INLET - HOSE CONNECT | 3/8" FNPT with adapters* |
| OUTLET - LANCE CONNECT | 1/4" FNPT |



*INCLUDES BONUS ADAPTERS
QTY 1: 3/8" MNPT x M22 Male
QTY 1: 3/8" MNPT x QC Plug

DIAL-N-WASH® ADJUSTABLE PRESSURE REGULATOR

| | |
|-----------------------|------------|
| PART NUMBER | 82232 |
| MAX PRESSURE | 4500 PSI |
| MAX GPM | 4.0 GPM |
| MAX TEMP | 140° F |
| INLET - LANCE CONNECT | M22 Female |
| OUTLET - GUN CONNECT | M22 Male |



16" SPRAY LANCE

| | |
|-------------------------|-----------------|
| PART NUMBER | 80149 |
| MAX PRESSURE | 3600 PSI |
| MAX GPM | N/A |
| MAX TEMP | 140° F |
| INLET - GUN CONNECT | M22 Male |
| OUTLET - NOZZLE CONNECT | 1/4" QC Coupler |



31" SPRAY LANCE

| | |
|-------------------------|-----------------|
| PART NUMBER | 80479 |
| MAX PRESSURE | 4500 PSI |
| MAX GPM | N/A |
| MAX TEMP | 140° F |
| INLET - GUN CONNECT | M22 Male |
| OUTLET - NOZZLE CONNECT | 1/4" QC Coupler |



48" INSULATED LANCE

| | |
|-------------------------|-----------------|
| PART NUMBER | 80179 |
| MAX PRESSURE | 5000 PSI |
| MAX GPM | N/A |
| MAX TEMP | 212° F |
| INLET - GUN CONNECT | 1/4" MNPT |
| OUTLET - NOZZLE CONNECT | 1/4" QC Coupler |



O-RING & FILTER KIT



| | |
|-----------------|------------|
| PART NUMBER | 80151 |
| TWO FILTERS | One Size |
| TWO O-RING SETS | Five Sizes |

DID YOU KNOW?

- You should always replace any worn or broken nozzles as they can potentially be a safety hazard.
- You should always use accessories that are within your pressure washer's PSI range. Always refer to your product user manual for additional details.



NOZZLES

SET OF 5 SPRAY NOZZLES: 0°, 15°, 25°, 40° AND SOAP



| | | |
|---------------|--------------|--------------|
| PART NUMBER | 80145 | 80146 |
| MAX PRESSURE | 3600 PSI | 4500 PSI |
| MAX TEMP | 212° F | 212° F |
| NOZZLE SIZE | 3.0, SOAP | 4.0, SOAP |
| LANCE CONNECT | 1/4" QC Plug | 1/4" QC Plug |

Plug

SET OF 2 SECOND STORY NOZZLES: WASH AND SOAP



| | |
|---------------|--------------|
| PART NUMBER | 80177 |
| MAX PRESSURE | 5000 PSI |
| MAX TEMP | 212° F |
| NOZZLE SIZE | 10.0, 40.0 |
| LANCE CONNECT | 1/4" QC Plug |

5-N-1 SPRAY NOZZLE: 0°, 15°, 25°, 40° AND SOAP



| | |
|---------------|-----------------|
| PART NUMBER | 80142 |
| MAX PRESSURE | 3600 PSI |
| MAX TEMP | 140° F |
| NOZZLE SIZE | 2.8 - 3.2, SOAP |
| LANCE CONNECT | 1/4" QC Plug |

PREMIUM ACCESSORIES (CONT.)

OSCILLATING TURBO NOZZLES

LIMITED WARRANTY 90 DAY WARRANTY ACCESSORY



| | | | | | | |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|
| PART NUMBER | 80143 | 80144 | 80355 | 80356 | 80357 | 80358 |
| MAX PRESSURE | 3600 | 4500 | 5500 | 5500 | 5500 | 5500 |
| MAX TEMP | 212° F | 212° F | 212° F | 212° F | 212° F | 212° F |
| NOZZLE SIZE | 3.0 | 4.0 | 5.0 | 6.0 | 7.0 | 8.0 |
| LANCE CONNECT | 1/4" QC Plug | 1/4" QC Plug | 1/4" QC Plug | 1/4" QC Plug | 1/4" QC Plug | 1/4" QC Plug |

HOSE REELS



HOSE REELS

| | | | | |
|---------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| PART NUMBER | 80399 | 80490 | 80403 | 80401 |
| MAX PRESSURE | 5000 PSI | 5000 PSI | 5000 PSI | 5000 PSI |
| MAX TEMP | 212° F | 212° F | 212° F | 212° F |
| HOSE CAPACITY | 100' x 3/8" | 100' x 3/8" or 125' x 1/4" | 200' x 3/8" | 100' x 3/8" or 125' x 1/4" |
| MATERIAL | Heavy-duty Steel Construction | Heavy-duty Steel Construction | Heavy-duty Steel Construction | Heavy-duty Steel Construction |

*Does not have Hose Reel Guide

SURFACE CLEANERS

15" STEEL SURFACE CLEANER

| | |
|---------------|----------------------------------|
| PART NUMBER | 80165 |
| MAX PRESSURE | 3700 PSI |
| MAX TEMP | 140° F |
| LANCE CONNECT | 1/4" Plug |
| MATERIAL | Powder Coated Steel Construction |



20" COMMERCIAL SURFACE CLEANER

| | |
|---------------|---------------------|
| PART NUMBER | 80182 |
| MAX PRESSURE | 4500 PSI |
| MAX TEMP | 212° F |
| LANCE CONNECT | 3/8" Plug |
| MATERIAL | Heavy-duty ABS |
| FILTER | High Pressure Inlet |



PUMP CARE

PUMP GUARD

| | |
|----------------|-------|
| PART NUMBER | 80130 |
| CONTENT AMOUNT | 12oz |



PUMP GUARD- AEROSOL

| | |
|----------------|-------|
| PART NUMBER | 88266 |
| CONTENT AMOUNT | 4oz |




15W40 PUMP OIL

| | |
|----------------|-------|
| PART NUMBER | 80138 |
| CONTENT AMOUNT | 16oz |



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

- HIGHER PRESSURE AT THE NOZZLE
- GREATER IMPACT AND CLEANING PERFORMANCE

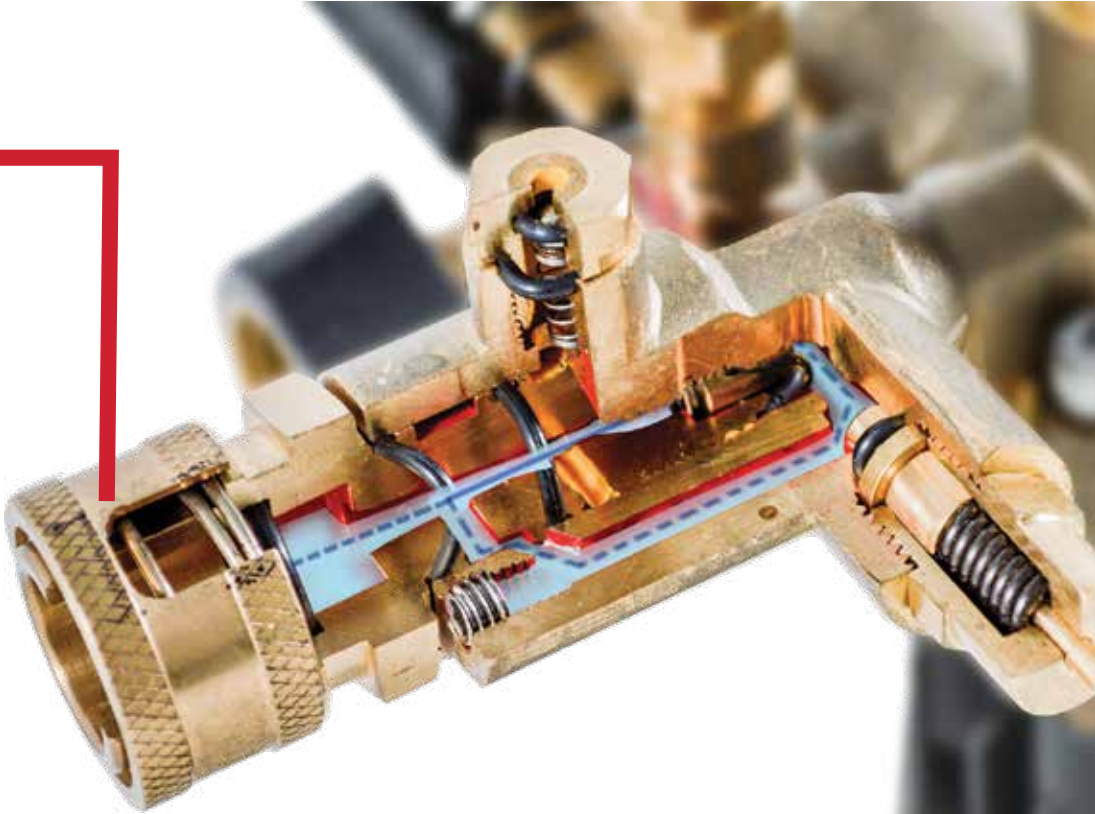


The Low Oil Shutdown (LOS) feature helps to prevent engine damage due to a low oil condition. LOS is an oil level sensor inside the engine crankcase. When the engine oil reaches a level that is too low for proper operation, the LOS will automatically stop the engine, indicating the oil needs to be refilled.

PREMIUM PUMPS


All Pump Kits come fully plumbed. Includes:

- Pump
- Mounting hardware (Nuts & Bolts)
- Siphon hose with filter
- Shaft key
- Instruction booklet


OEM TECHNOLOGIES™ AXIAL CAM PUMP KITS




Vertical Pump Kit Materials




| | | |
|------------------|-----------------------------------|----------|
| PART NUMBER | 90025 | VERTICAL |
| MAX PRESSURE | 2400 PSI | |
| MAX GPM | 2.0 GPM | |
| MANIFOLD | Clear Anodized Aluminum Manifold | |
| UNLOADER | Integrated w/ Easy Start Unloader | |
| SHAFT SIZE | 7/8" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 1yr | |




| | | |
|------------------|-----------------------------------|----------|
| PART NUMBER | 90026 | VERTICAL |
| MAX PRESSURE | 3100 PSI | |
| MAX GPM | 2.4 GPM | |
| MANIFOLD | Clear Anodized Aluminum Manifold | |
| UNLOADER | Integrated w/ Easy Start Unloader | |
| SHAFT SIZE | 7/8" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 1yr | |




| | | |
|------------------|-----------------------------------|----------|
| PART NUMBER | 90027 | VERTICAL |
| MAX PRESSURE | 3300 PSI | |
| MAX GPM | 2.4 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated w/ Easy Start Unloader | |
| SHAFT SIZE | 7/8" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 1yr | |



Horizontal Pump Kit Materials



| | | |
|------------------|-----------------------------------|------------|
| PART NUMBER | 90028 | HORIZONTAL |
| MAX PRESSURE | 3300 PSI | |
| MAX GPM | 2.4 GPM | |
| MANIFOLD | Clear Anodized Aluminum Manifold | |
| UNLOADER | Integrated w/ Easy Start Unloader | |
| SHAFT SIZE | 3/4" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 2yr | |



| | | |
|------------------|-----------------------------------|------------|
| PART NUMBER | 90029 | HORIZONTAL |
| MAX PRESSURE | 3400 PSI | |
| MAX GPM | 2.5 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated w/ Easy Start Unloader | |
| SHAFT SIZE | 3/4" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 2yr | |

AAA™ PUMP KITS



AAA™ Triplex Pump Kit Materials



| | | |
|------------------|--|-------------|
| PART NUMBER | 90038 | POWER BOOST |
| MAX PRESSURE | 3800 PSI | |
| MAX GPM | 3.5 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated & Adjustable w/ Easy Start Unloader | |
| SHAFT SIZE | 1" Shaft | |
| THREADING | Garden Hose Inlet/ QC Outlet | |
| LIMITED WARRANTY | 5yr | |



| | | |
|------------------|--|-------------|
| PART NUMBER | 90039 | POWER BOOST |
| MAX PRESSURE | 4000 PSI | |
| MAX GPM | 3.5 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated & Adjustable w/ Easy Start Unloader | |
| SHAFT SIZE | 1" Shaft | |
| THREADING | Garden Hose Inlet/ QC Outlet | |
| LIMITED WARRANTY | 5yr | |




| | | |
|------------------|--|-------------|
| PART NUMBER | 90034 | POWER BOOST |
| MAX PRESSURE | 4400 PSI | |
| MAX GPM | 4.0 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated & Adjustable w/ Easy Start Unloader | |
| SHAFT SIZE | 1" Shaft | |
| THREADING | Garden Hose Inlet/ QC Outlet | |
| LIMITED WARRANTY | 5yr | |

PREMIUM PUMPS (CONT.)


AAA™ PUMP KITS



Pump Kit Materials




| | | |
|------------------|--|-------------|
| PART NUMBER | 90052 | POWER BOOST |
| MAX PRESSURE | 3500 PSI | |
| MAX GPM | 2.5 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated & Adjustable w/ Easy Start Unloader | |
| SHAFT SIZE | 3/4" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 3yr | |




| | | |
|------------------|--|-------------|
| PART NUMBER | 90036 | POWER BOOST |
| MAX PRESSURE | 3200 PSI | |
| MAX GPM | 2.8 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated & Adjustable w/ Easy Start Unloader | |
| SHAFT SIZE | 3/4" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 5yr | |




| | | |
|------------------|--|-------------|
| PART NUMBER | 90037 | POWER BOOST |
| MAX PRESSURE | 3700 PSI | |
| MAX GPM | 2.5 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Integrated & Adjustable w/ Easy Start Unloader | |
| SHAFT SIZE | 3/4" Shaft | |
| THREADING | Garden Hose Inlet/ M22 Outlet | |
| LIMITED WARRANTY | 5yr | |



Pump Kit Materials



| | | |
|------------------|----------------------------------|--|
| PART NUMBER | 90058 | |
| MAX PRESSURE | 3000 PSI | |
| MAX GPM | 3.0 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Remote Unloader with Bypass Hose | |
| SHAFT SIZE | 3/4" Shaft | |
| THREADING | Garden Hose Inlet/ QC Outlet | |
| LIMITED WARRANTY | 5yr | |



| | | |
|------------------|----------------------------------|--|
| PART NUMBER | 90057 | |
| MAX PRESSURE | 3500 PSI | |
| MAX GPM | 4.0 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Remote Unloader with Bypass Hose | |
| SHAFT SIZE | 1" Shaft | |
| THREADING | Garden Hose Inlet/ QC Outlet | |
| LIMITED WARRANTY | 5yr | |



| | | |
|------------------|----------------------------------|--|
| PART NUMBER | 90056 | |
| MAX PRESSURE | 4400 PSI | |
| MAX GPM | 4.0 GPM | |
| MANIFOLD | Brass Manifold | |
| UNLOADER | Remote Unloader with Bypass Hose | |
| SHAFT SIZE | 1" Shaft | |
| THREADING | Garden Hose Inlet/ QC Outlet | |
| LIMITED WARRANTY | 5yr | |

AAA™ PUMP UNLOADERS



| | | |
|--------------|---------------------------|--|
| PART NUMBER | 80362 | |
| MAX PRESSURE | 3600 PSI | |
| MAX GPM | 12 GPM | |
| MATERIAL | Brass Construction | |
| THREADING | 3/8" FTP Inlet/ QC Outlet | |
| MAX TEMP | 212° F | |



| | | |
|--------------|---------------------------|--|
| PART NUMBER | 80361 | |
| MAX PRESSURE | 4500 PSI | |
| MAX GPM | 12 GPM | |
| MATERIAL | Brass Construction | |
| THREADING | 3/8" FTP Inlet/ QC Outlet | |
| MAX TEMP | 212° F | |



| | | |
|--------------|---------------------------|--|
| PART NUMBER | 80404 | |
| MAX PRESSURE | 5500 PSI | |
| MAX GPM | 12 GPM | |
| MATERIAL | Brass Construction | |
| THREADING | 3/8" FTP Inlet/ QC Outlet | |
| MAX TEMP | 212° F | |



| | | |
|--------------|------------------------------|--|
| PART NUMBER | 80405 | |
| MAX PRESSURE | 6500 PSI | |
| MAX GPM | 12 GPM | |
| MATERIAL | Stainless Steel Construction | |
| THREADING | 3/8" FTP Inlet/ QC Outlet | |
| MAX TEMP | 212° F | |



| | | |
|--------------|---------------------------|----------------|
| PART NUMBER | 80364 | BANJO UNLOADER |
| MAX PRESSURE | 3600 PSI | |
| MAX GPM | 12 GPM | |
| MATERIAL | Brass Construction | |
| THREADING | 3/8" FTP Inlet/ QC Outlet | |
| MAX TEMP | 212° F | |



| | | |
|--------------|---------------------------|----------------|
| PART NUMBER | 80363 | BANJO UNLOADER |
| MAX PRESSURE | 4500 PSI | |
| MAX GPM | 12 GPM | |
| MATERIAL | Brass Construction | |
| THREADING | 3/8" FTP Inlet/ QC Outlet | |
| MAX TEMP | 212° F | |

 - Indicates pump equipped with PowerBoost® see page 38 for details.

INTERESTED IN BECOMING A **SIMPSON® DEALER?**

Partner with a vertically integrated manufacturer of outdoor power equipment as a SIMPSON® dealer and enjoy the following benefits:

- 1 Dedicated Account Representative to help grow your **SIMPSON** business
- 2 Access to exclusive sales promotions
- 3 Invitations to exclusive **DEALER ONLY** trade shows and events
- 4 View our full library of literature including promotional sales materials
- 5 Become your own service center and increase your business

HAVE QUESTIONS? CONTACT YOUR SALES REPRESENTATIVE AT: SALES@SIMPSONCLEANING.COM
OR CALL US **1-847-348-1500**



CETA CPC-100 CERTIFIED **TESTING STANDARDS**

Why choose a CETA Certified product?




- ✓ **PROFESSIONAL MEMBER BASE:**
CETA has a membership base of over 200 entities from four different countries representing manufacturers, dealers, service providers, customers/end-users and associates.
- ✓ **TOP INDUSTRY RATINGS:**
CETA only allows for products to operate within and no less than 90% of the product rating. This accounts for normal variances within the manufacturing process.
- ✓ **PRECISE TESTING STANDARDS:**
CETA certified products are rated based on performance recorded using the **same** nozzle as opposed to utilizing skewed data from different nozzle sizes.
- ✓ **CERTIFIED PERFORMANCE:**
The CETA standard provides the end-user with a pressure washer that is certified to perform as intended with any nozzle provided as OEM equipment.

For more information visit <https://ceta.org/cpc-100-performance-standard/>

THANK YOU FOR **CHOOSING SIMPSON®**



LEARN MORE AT **SIMPSONCLEANING.COM**

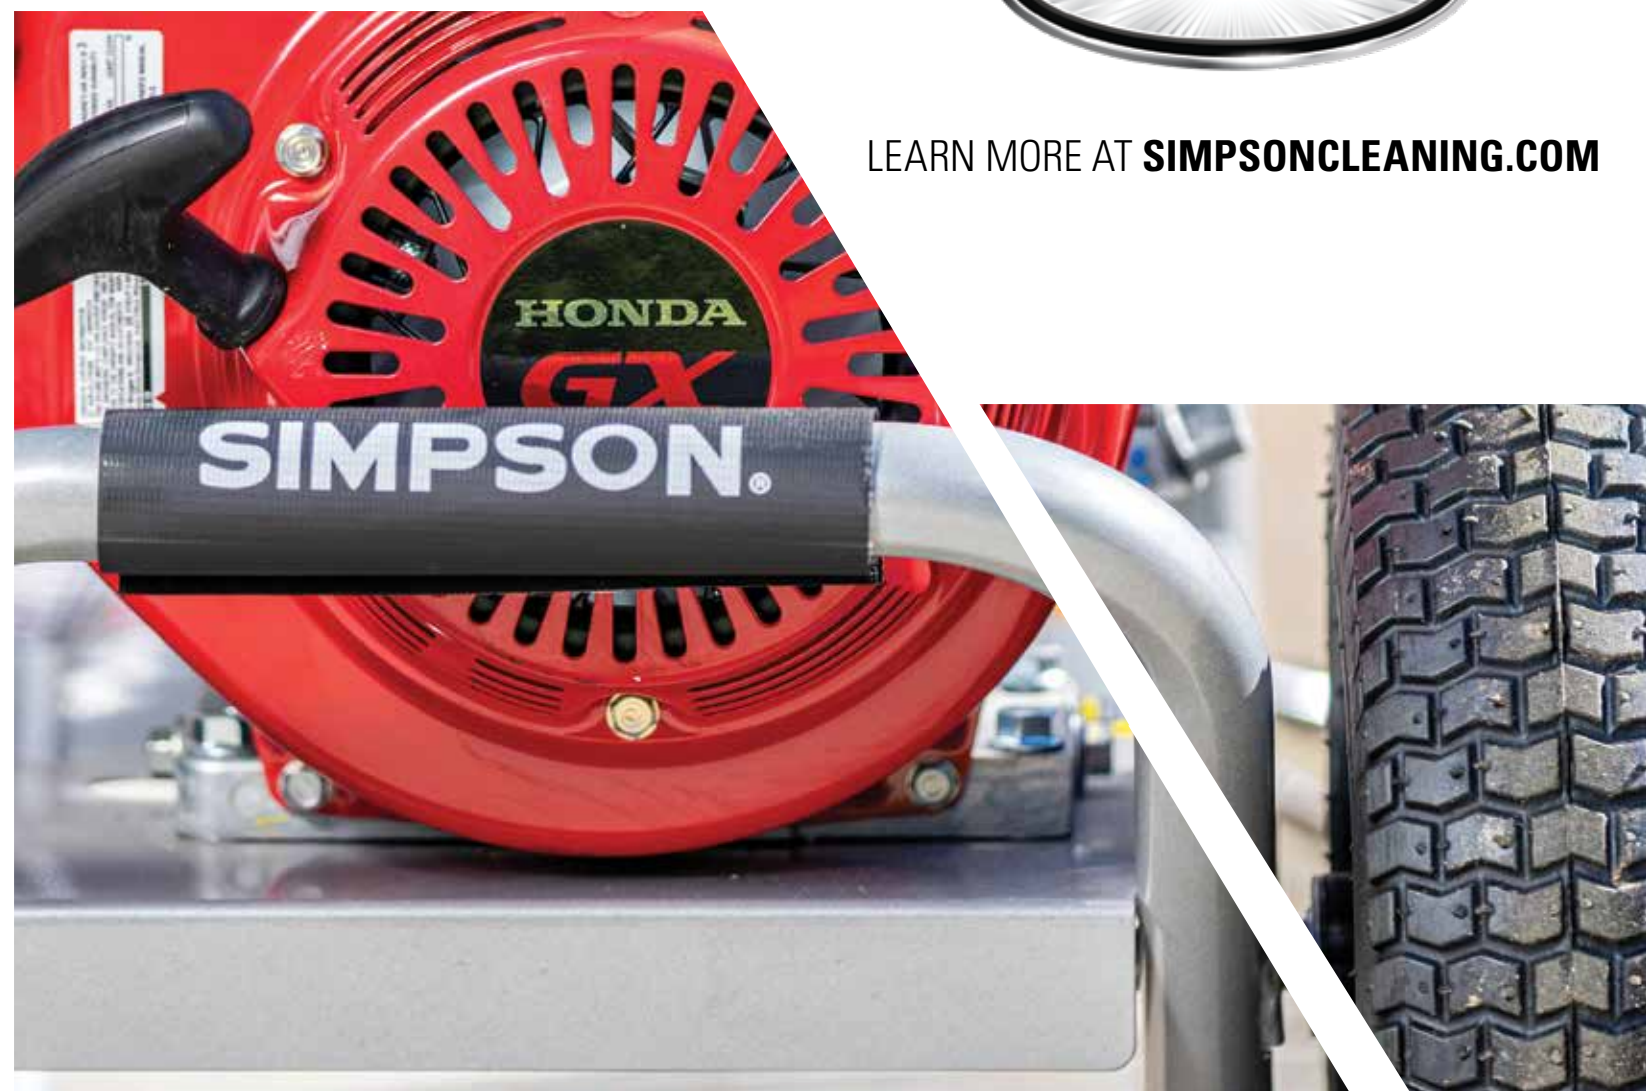



Driven by **PERFORMANCE™**

Disclaimer of liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information as possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog, also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-847-348-1500 with any concerns.

FC08252021-V10

LEARN MORE AT [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com) | CONNECT WITH US ON SOCIAL MEDIA: [SIMPSON_OPE](#)

