

## **COLD WATER MOBILE TRAILER**

**FRAME** 


Welded steel frame construction with powder-coated finish for durability and corrosion resistance

## **HONDA® GX390 ENGINE**

Equipped with a low oil shutdown feature

## 13" PREMIUM 6-PLY **TIRES**

For increased mobility across various terrains

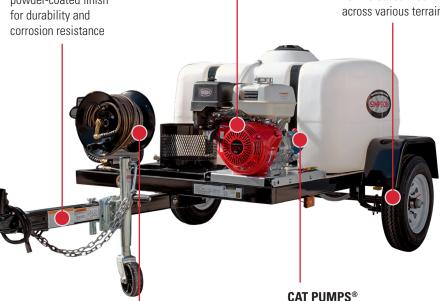

## **PRESSURE HOSE**

Non-marring, flexible, kink and abrasion resistant with **INDUSTRIAL TRIPLEX** 

With external unloader and bypass hose

100' DUAL BRAIDED HIGH

QC fittings and polyurethane

outer jacket

POWERED by HONDA

**NOT FOR SALE IN CALIFORNIA** 

**PART#** 95002

PRESSURE RATING: 4200 PSI

FLOW RATING: 4.0 GPM

**ENGINE:** HONDA® GX390

**PUMP:** CAT PUMPS® Industrial Triplex

**TRAILER SIZE:** 9' Overall (4'x 5'6" Platform)

**TRAILER FRAME:** Rectangular think wall steel tubing

**AXLE RATING: 2000 lbs** 

TIRE: 5.30" - 12"

**LIGHTING: LED** 

TRAILER HITCH BALL SIZE: 2" ball

WATER TANK SIZE: 150 gal

**HIGH PRESSURE HOSE:** 3/8" x 100' Monster Hose

**HIGH PRESSURE HOSE REEL: 100'** 

**SUPPLY HOSE: N/A** 

**SUPPLY REEL: N/A** 

**DIMENSIONS / WEIGHT:** L:80" x W:52" x H:72" | 630 lbs.

**LIMITED PRODUCT WARRANTIES** 

3 YEAR ENGINE WARRANTY

**5 YEAR** PUMP WARRANTY

1 YEAR FRAME WARRANTY