



# INDUSTRIAL EQUIPMENT CATALOG

**CRX**®





## **A MESSAGE FROM THE EXECUTIVE VICE PRESIDENT OF FNA GROUP**

For more than six decades, FNA Group has built its reputation on one foundational belief: professionals deserve equipment engineered to perform, built to last, and supported by people who stand behind their work. That belief has shaped the growth of our entire family of brands, each playing a vital role in delivering industry leading solutions to the markets we serve.

SIMPSON continues to define what commercial cleaning equipment should be: durable, powerful, and trusted on the job. Delco brings a legacy of premium cleaning systems and commercial innovation that professionals have relied on for generations. CRX extends our commitment even further with purpose-built power solutions designed for strength, reliability, and long-term value. Together these brands represent the depth, versatility, and engineering excellence that define FNA Group.

Our vertically integrated approach from industrial design and component manufacturing to the advanced AAA<sup>®</sup> pump technologies that power many of our machines, allows us to maintain strict quality control while continuously pushing innovation forward. This isn't just product development; it's a disciplined commitment to performance, safety, and the evolving needs of the people who depend on our equipment every day.

But above all, our work is shaped by the relationships we've built with the professionals, dealers, and partners who trust our brands. You are not just customers - you're part of the FNA family. Your feedback guides our engineering. Your expectations set our standards. Your success is the measure we use to define our own.

This catalog reflects that commitment. It showcases not only the breadth of our product lines, but the passion, pride, and craftsmanship poured into every machine we build. Across each FNA facility in the United States, our teams show up every day with a shared mission: to support your work, your business, and your livelihood with equipment that performs when it matters most.

Thank you for your partnership, your trust, and your continued belief in the brands of FNA Group. We are honored to serve you, and we look forward to building the future of this industry together, as one family.

**WILLIAM ALEXANDER**

Executive Vice President of FNA Group

# TABLE OF CONTENTS

## PRESSURE WASHERS 4

Electric Series	5
Powershot® Series	6
Aluminum Series	7
Water Blaster® Series	8
Water Shotgun® Series	9
Industrial Series	10
Rental Series	11
Super Pro Roll Cage Series	12
Truck Mount Series	14
Soft Wash Series	15
Brute Series	16

## MOBILE TRAILERS 20

SWT Water Trailer Series	22
Cold Water Series	23
Hot Water Series	24

## GENERATORS & INVERTER GENERATORS 26

SIMPSON Generators	27
SCGH Series	28
SCGH Industrial Series	29
SIMPSON Inverters	30

## COMPRESSOR/WELDER/GENERATOR 31

## WATER PUMPS 32

## CARPET EXPRESS 33

## ACCESSORIES 34

High Performance Hoses	35
Premium Accessories	36
Professional Cleaning Detergents	37
Premium Pumps & Unloader Kits	38

## ENGINES 39

## DELCO PRESSURE WASHERS 40

Dual Wash Pro Series	41
Patriot Series	42
Cobalt Series	43
Versa Series	44
Streamliner Series	45
Eliminator Series	46
Equalizer Series	48
Dominator Series	49
CWE Series	50
Mobile Trailer Series	51



## DISCLAIMER

1. \$3500 min. order for prepaid freight on all machines
2. \$500 min. order for prepaid freight on all accessories, pumps, hoses
3. No prepaid freight program for trailers
4. FNA reserves the right to adjust the prices quoted herein due to cost increase of raw materials, products, components, currency fluctuations, tariff increases, and any other increase beyond FNA's controls.

**PRESSURE WASHERS  
ENGINEERED  
FOR DURABILITY.  
DESIGNED FOR  
RESULTS.**



# ELECTRIC SERIES

## PROFESSIONAL

Designed for ease of use on the job site, the SIMPSON® Electric Series offers simplicity and efficiency. Its compact, lightweight frame makes it easy to transport and maneuver, ensuring quick setup and reliable performance for various cleaning tasks.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 1-Year Motor



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP / DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
IS1520012A	61129	1500 PSI	2.0 GPM	1.5HP / 120V / 1Ø / 13A	AAA® / Direct	16"	Steel	3/8" x 25', QC	N/A
<b>RENTAL</b>									
IR1520012A	61094	1500 PSI	2.0 GPM	1.5HP / 120V / 1Ø / 13A	AAA® / Direct	16"	Steel	3/8" x 25', QC	8"
PES2030012B	61130	2000 PSI	3.0 GPM	3HP / 230V / 1Ø / 18.2A	AAA® / Direct	36"	Steel	3/8" x 50', QC	13"
PESAL2030012B	61314	2000 PSI	3.0 GPM	3HP / 230V / 1Ø / 18.2A	AAA® / Direct	36"	Aluminum	3/8" x 50', QC	13"
PES2535012B	61131	2500 PSI	3.5 GPM	5HP / 230V / 1Ø / 24.8A	AAA® / Direct	36"	Steel	3/8" x 50', QC	13"
PESAL2535012B	61315	2500 PSI	3.5 GPM	5HP / 230V / 1Ø / 24.8A	AAA® / Direct	36"	Aluminum	3/8" x 50', QC	13"
PES3040012B	61132	3000 PSI	4.0 GPM	8HP / 230V / 1Ø / 30.6A	AAA® / Direct	36"	Steel	3/8" x 50', QC	13"
PESAL3040012B	61316	3000 PSI	4.0 GPM	8HP / 230V / 1Ø / 28.5A	AAA® / Direct	36"	Aluminum	3/8" x 50', QC	13"

### PUMP

#### AAA® Industrial Triplex Pump

- Forged brass manifold (61130, 61314, 61131, 61315, 61132, 61316)
- Ceramic-coated plunger sleeves
- Thermal relief valve
- Integrated unloader (61094, 61129)
- External unloader with bypass hose

### FRAMES

#### Aircraft-Grade Aluminum Frame

- Light weight and corrosion-resistant

#### Steel Frame

- Durable and corrosion-resistant

### HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

### TIRES

- Premium never-flat wheels or pneumatic tires for ease of maneuverability across various terrains

### NOZZLES

- (4) quick-connect nozzles for a variety of cleaning applications

### ELECTRICAL CORD

- 35' long, with GFCI protection

### DIMENSIONS & WEIGHTS

61129	L 18" x W 13" x H 17"   47 lbs.
61094	L 26" x W 22" x H 24"   87 lbs.
61130, 61314, 61131, 61315	L 46" x W 26" x H 24"   145 lbs.
61132, 61316	L 46" x W 26" x H 24"   175 lbs.

# POWERSHOT® SERIES

## PROFESSIONAL

The SIMPSON® Powershot® Series combines durability and high performance, built for the toughest jobs. Suited for professionals in industries like contract cleaning, facility maintenance, and paint prep, it provides the power and reliability needed for demanding projects.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

<b>60629</b>	10-Year Frame, 5-Year Pump, 3-Year Engine
<b>61014</b>	10-Year Frame, 3-Year Pump, 3-Year Engine
<b>61368</b>	10-Year Frame, 5-Year Pump, 3-Year Engine
<b>60869</b>	10-Year Frame, 5-Year Pump, 3-Year Engine
<b>60456</b>	10-Year Frame, 5-Year Pump, 3-Year Engine
<b>60843</b>	10-Year Frame, 5-Year Pump, 3-Year Engine



60869



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
<b>PS3228-S<sup>1</sup></b>	60629	3300 PSI	2.5 GPM	HONDA® GX200*	AAA® / Direct	16"	Steel	5/16" x 25' M22, MorFlex®	10"
<b>PS61002-S<sup>1</sup></b>	61014	3500 PSI	2.5 GPM	HONDA® GX200*	AAA® / Direct	16"	Steel	5/16" x 25' M22, MorFlex®	10"
<b>PS61368<sup>1</sup></b>	61368	3600 PSI	2.5 GPM	HONDA® GX200*	AAA® / Direct	16"	Steel	5/16" x 25' M22, MorFlex®	10"
<b>PS60869<sup>1</sup></b>	60869	4000 PSI	3.5 GPM	HONDA® GX270*	AAA® / Direct	31"	Steel	3/8" x 50', QC	13"
<b>PS4240<sup>1</sup></b>	60456	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® / Direct	31"	Steel	3/8" x 50', QC	13"
<b>PS60843<sup>1</sup></b>	60843	4400 PSI	4.0 GPM	CRX® 420*	AAA® / Direct	31"	Steel	3/8" x 50', QC	13"

### PUMP

#### AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- Integrated unloader

#### AAA® Axial Pump (61014 only)

- Thermal relief valve
- Integrated unloader

### FRAME

#### Steel Frame

- Durable and corrosion-resistant

### HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

### TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

### NOZZLES

- (5) quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
<b>CRX® 420</b>	420cc	1.6 gal.
<b>HONDA® GX270</b>	270cc	1.4 gal.
<b>HONDA® GX390</b>	389cc	1.6 gal.

### DIMENSIONS / WEIGHT

<b>60629</b>	L 21" x W 24" x H 34"   77 lbs.
<b>61014</b>	L 21" x W 24" x H 34"   74 lbs.
<b>61368</b>	L 21" x W 24" x H 34"   77 lbs.
<b>60869</b>	L 38" x W 24" x H 29"   120 lbs.
<b>60456</b>	L 38" x W 24" x H 29"   136 lbs.
<b>60843</b>	L 38" x W 24" x H 29"   138 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# ALUMINUM SERIES

## PROFESSIONAL

Engineered to meet the needs of cleaning professionals, the SIMPSON® Aluminum Series features a lighter aircraft-grade aluminum frame. Ideal for contractors handling heavy-duty cleaning tasks like paint prep, equipment washing, and facility cleaning, it offers portability without compromising on strength.



61252

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 0°, 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
ALH3228-S <sup>1</sup>	60735	3400 PSI	2.5 GPM	HONDA® GX200*	CAT PUMPS® / Direct	16"	Aluminum	5/16" x 25', QC	10"
ALH3425-S <sup>1</sup>	60689	3600 PSI	2.5 GPM	HONDA® GX200*	AAA® / Direct	16"	Aluminum	5/16" x 35', M22	10"
ALH4240 <sup>1</sup>	60688	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS® / Direct	31"	Aluminum	3/8" x 50', QC	13"
ALH4440 <sup>1</sup>	61252	4400 PSI	4.0 GPM	CRX® 420*	CAT PUMPS® / Direct	31"	Aluminum	3/8" x 50', QC	13"

### PUMPS

#### AAA® Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- Adjustable integrated unloader with easy start

#### CAT PUMPS® Triplex

- Thermal relief valve
- Integrated with easy-start unloader

### FRAME

#### Aircraft-Grade Aluminum Frame

- Light weight and corrosion-resistant

### HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket
- MorFlex® high-pressure hose is non-marring, flexible, and abrasion-resistant with M22 fittings

### TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

### NOZZLES

- (5) quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	1.6 gal.
HONDA® GX200	196cc	0.8 gal.
HONDA® GX390	389cc	1.6 gal.

### DIMENSIONS & WEIGHTS

60735	L 21" x W 24" x H 34"   81 lbs.
60689	L 21" x W 24" x H 24"   78 lbs.
60688, 61252	L 38" x W 24" x H 29"   133 lbs.

<sup>◇</sup> ETL Certified Model.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# WATER BLASTER® SERIES

## PROFESSIONAL & INDUSTRIAL

The SIMPSON® Water Blaster® Series offers a robust solution for professional cleaners, excelling in tasks like deck cleaning, wood restoration, paint preparation, and graffiti removal. Its dual-belt system separates the engine and pump, preventing overheating and pump fatigue, ensuring optimal performance and reliability even in the most challenging environments.



60827

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
<b>PROFESSIONAL</b>									
ALWB4240211 <sup>1</sup>	60827	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® / Belt	48"	Aluminum	3/8" x 50', QC	13"
WB4240211 <sup>1</sup>	60205	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® / Belt	48"	Steel	3/8" x 50', QC	13"
WB4440111 <sup>1</sup>	60824	4400 PSI	4.0 GPM	CRX® 420*	AAA® / Belt	48"	Steel	3/8" x 50', QC	13"
ALWB4440111 <sup>1</sup>	60825	4400 PSI	4.0 GPM	CRX® 420*	AAA® / Belt	48"	Aluminum	3/8" x 50', QC	13"
<b>INDUSTRIAL</b>									
ALWB4240261 <sup>1</sup>	60828	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS® / Belt	48"	Aluminum	3/8" x 50', QC	13"

### PUMP

#### AAA® Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose

#### CAT PUMP® Triplex

- Slow speed
- Thermal relief valve
- External unloader with bypass hose

### FRAME

#### Aircraft-Grade Aluminum Frame

- Light weight and corrosion-resistant

#### Steel Frame

- Durable and corrosion-resistant

### HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

### TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

### NOZZLES

- (4) quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	1.6 gal.
HONDA® GX390	389cc	1.6 gal.

### DIMENSIONS & WEIGHTS

60205, 60824	L 46" x W 26" x H 25"   159 lbs.
60827, 60828	L 46" x W 26" x H 25"   146 lbs.
60825	L 46" x W 26" x H 25"   143 lbs.



EXTERNAL UNLOADER WITH BYPASS HOSE

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# WATER SHOTGUN® SERIES

## INDUSTRIAL

Designed for deep cleaning, the Water Shotgun® Series is ideal for paint preparation, professional cleaning, graffiti removal, industrial sites, and fleet maintenance. Featuring a powerful twin-cylinder engine, it also incorporates a dual-belt system that separates the engine and pump to prevent overheating and pump fatigue, enhancing both efficiency and the lifespan of the engine and pump.



60243

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

**All Units** 10-Year Frame, 5-Year Pump, 3-Year Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
WS5050231E <sup>0,1,2</sup>	60243	5000 PSI	5.0 GPM	HONDA® GX690* / Key-start	COMET / Belt	48"	Steel	3/8" x 50, QC	13"

### PUMP

#### COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose
- Solid-bronze conrod

### FRAME

#### Steel Frame

- Durable and corrosion-resistant

### HOSE

- R2 dual steel-braided hose with wrapped-rubber outer jacket and bend protectors

### TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

### NOZZLES

- MEG nozzles with 1/4" MNPT connection

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
HONDA® GX690	688cc	6.0 gal. External

### DIMENSIONS & WEIGHTS

60243 L 49" x W 29" x H 27" | 214 lbs.



Includes 6-gallon external fuel tank

<sup>0</sup> ETL Certified Model.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

<sup>2</sup> Battery not included.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# INDUSTRIAL SERIES

The SIMPSON® Industrial Series, a valuable addition to the pressure washer lineup, is tailored for construction, rentals, oil fields, heavy-duty paint prep, and large-scale projects. This series ensures reliable and efficient performance, making it an essential tool for these challenging tasks.



61026

## UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 0°, 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

## LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine



CRX<sup>®</sup> POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	HOSE	FRAME TYPE	TIRES
IS3030212 <sup>0,1</sup>	61024	3000 PSI	3.0 GPM	HONDA <sup>®</sup> GX200*	AAA <sup>®</sup> / Direct	16"	3/8" x 50', QC	Aluminum	10"
IS3030112 <sup>1</sup>	61279	3000 PSI	3.0 GPM	CRX <sup>®</sup> 210*	AAA <sup>®</sup> / Direct	16"	3/8" x 50', QC	Aluminum	10"
IS3540212 <sup>0,1</sup>	61026	3500 PSI	4.0 GPM	HONDA <sup>®</sup> GX270*	AAA <sup>®</sup> / Direct	31"	3/8" x 50', QC	Aluminum	13"
IS4240231 <sup>0,1</sup>	61030	4200 PSI	4.0 GPM	HONDA <sup>®</sup> GX390*	COMET / Belt	31"	3/8" x 50', QC	Aluminum	13"
IS4440212 <sup>0,1</sup>	61028	4400 PSI	4.0 GPM	HONDA <sup>®</sup> GX390*	AAA <sup>®</sup> / Direct	31"	3/8" x 50', QC	Aluminum	13"
IS4440112 <sup>0,1</sup>	61029	4400 PSI	4.0 GPM	CRX <sup>®</sup> 420*	AAA <sup>®</sup> / Direct	31"	3/8" x 50', QC	Aluminum	13"
IS4240131 <sup>0,1</sup>	61274	4200 PSI	4.0 GPM	CRX <sup>®</sup> 420*	COMET / Belt	48"	3/8" x 50', QC	Aluminum	13"

## PUMPS

### AAA<sup>®</sup> Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose

### COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

## FRAME

### Aircraft-Grade Aluminum Frame

- Light weight and corrosion-resistant

## HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

## TIRES

- Premium foam-filled tires for ease of maneuverability across various terrains

## NOZZLES

- (5) quick-connect nozzles for a variety of cleaning applications

## ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX <sup>®</sup> 210	208cc	0.8 gal.
CRX <sup>®</sup> 420	420cc	1.6 gal.
HONDA <sup>®</sup> GX200	196cc	0.8 gal.
HONDA <sup>®</sup> GX270	270cc	1.4 gal.
HONDA <sup>®</sup> GX390	389cc	1.6 gal.

## DIMENSIONS & WEIGHT

61024, 61279	L 32" x W 22" x H 23"   85 lbs.
61026	L 38" x W 23" x H 27"   125 lbs.
61030	L 46" x W 27" x H 26"   180 lbs.
61029	L 38" x W 23" x H 27"   131 lbs.
61028	L 38" x W 23" x H 27"   136 lbs.

<sup>0</sup> ETL Certified Model.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# RENTAL SERIES

## INDUSTRIAL

Built for the rental industry to ensure maximum uptime, the SIMPSON® Rental Series comes standard with an robust water inlet filter, dual braided high-pressure hose with QC fittings, and clear set-up and use instructions on the steel dashboards. Trust in its added durability, courtesy of the heavy-duty aluminum frames.



61462

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine



CRX POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FRAME	HOSE	TIRES
IRAL3030142 <sup>1</sup>	61457	3000 PSI	3.0 GPM	CRX® 210*	UDOR® / Direct	36"	Aluminum	3/8" x 50', QC	10"
IRAL3030242 <sup>1</sup>	61458	3000 PSI	3.0 GPM	HONDA® GX200*	UDOR® / Direct	36"	Aluminum	3/8" x 50', QC	10"
IRAL3030141 <sup>1</sup>	61463	3000 PSI	3.0 GPM	CRX® 210*	UDOR® / Belt	48"	Aluminum	3/8" x 50', QC	13"
IRAL3030241 <sup>1</sup>	61464	3000 PSI	3.0 GPM	HONDA® GX200*	UDOR® / Belt	48"	Aluminum	3/8" x 50', QC	13"
IRAL3535142 <sup>1</sup>	61459	3500 PSI	3.5 GPM	CRX® 340**	UDOR® / Direct	48"	Aluminum	3/8" x 50', QC	10"
IRAL3535242 <sup>1</sup>	61460	3500 PSI	3.5 GPM	HONDA® GX270*	UDOR® / Direct	48"	Aluminum	3/8" x 50', QC	10"
IRAL3535111 <sup>1</sup>	61465	3500 PSI	3.5 GPM	CRX® 340*	AAA® / Belt	48"	Aluminum	3/8" x 50', QC	13"
IRAL3535211 <sup>1</sup>	61466	3500 PSI	3.5 GPM	HONDA® GX270	AAA® / Belt	48"	Aluminum	3/8" x 50', QC	13"
IRAL4040142 <sup>1</sup>	61461	4000 PSI	4.0 GPM	CRX® 420*	UDOR® / Direct	48"	Aluminum	3/8" x 50', QC	10"
IRAL4040242 <sup>1</sup>	61462	4000 PSI	4.0 GPM	HONDA® GX390*	UDOR® / Direct	48"	Aluminum	3/8" x 50', QC	10"
IRAL4040111 <sup>1</sup>	61467	4000 PSI	4.0 GPM	CRX® 420*	AAA® / Belt	48"	Aluminum	3/8" x 50', QC	13"
IRAL4040211 <sup>1</sup>	61468	4000 PSI	4.0 GPM	HONDA® GX390*	AAA® / Belt	48"	Aluminum	3/8" x 50', QC	13"

### PUMPS

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### AAA® G-Series Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged-brass manifold
- Dual oil drain ports
- Thermal shock-resistant ceramic plunger sleeves
- External unloader with bypass hose
- Thermal relief valve

### FRAMES

#### Aircraft-Grade Aluminum Frame

- Light weight and corrosion-resistant

### HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

### TIRES

- Premium foam-filled tires for ease of maneuverability across various terrains

### NOZZLES

- (4) quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINES	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	0.8 gal.
CRX® 340	338cc	1.6 gal.
CRX® 420	420cc	1.6 gal.
HONDA® GX200	196cc	0.8 gal.
HONDA® GX270	270cc	1.4 gal.
HONDA® GX390	389cc	1.6 gal.

### DIMENSIONS & WEIGHT

61457, 61458	L 41" x W 19" x H 25"   80 lbs.
61459, 61460, 61461, 61462	L 41" x W 21" x H 27"   115 lbs.
61463, 61464	L 51" x W 26" x H 24"   145 lbs.
61465, 61466, 61467, 61468	L 51" x W 26" x H 24"   145 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.  
\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# SUPER PRO ROLL CAGE SERIES

## INDUSTRIAL

Designed for resilience on tough job sites, the SIMPSON® Super Pro Roll Cage Series feature high-quality pumps and engines encased in protective four-wheeled roll cages. These machines ensure stability and facilitate easy transportation across rugged terrains.



65227

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 0°, 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FUEL TANK CAPACITY	HOSE	TIRES
<b>SMALL</b>									
SRC3625212 <sup>0,1</sup>	65200	3600 PSI	2.5 GPM	HONDA® GX200*	AAA® / Direct	36"	0.8 gal.	5/16" x 25', QC	10"
SRC3625112 <sup>1</sup>	65202	3600 PSI	2.5 GPM	CRX® 210*	AAA® / Direct	36"	0.8 gal.	5/16" x 25', QC	10"
<b>MEDIUM</b>									
SRC4035212 <sup>0,1</sup>	65203	4000 PSI	3.5 GPM	HONDA® GX270*	AAA® / Direct	48"	1.4 gal.	3/8" x 50', QC,	10"
SRC4240211 <sup>0,1</sup>	65209	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® / Belt	48"	1.6 gal.	3/8" x 50', QC,	10"
SRC4440212 <sup>0,1</sup>	65206	4400 PSI	4.0 GPM	HONDA® GX390*	AAA® / Direct	48"	1.6 gal.	3/8" x 50', QC,	10"
SRC4440112 <sup>0,1</sup>	65208	4400 PSI	4.0 GPM	CRX® 420*	AAA® / Direct	48"	1.6 gal.	3/8" x 50', QC,	10"
SRC4440111 <sup>0,1</sup>	65211	4400 PSI	4.0 GPM	CRX® 420*	AAA® / Belt	48"	1.6 gal.	3/8" x 50', QC,	10"

Refer to page 37  
for hose reels



<sup>0</sup> ETL Certified Model.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# SUPER PRO ROLL CAGE SERIES CONTINUED

MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	SPRAY LANCE	FUEL TANK CAPACITY	NOZZLE	HOSE	TIRES
<b>LARGE</b>										
<b>SRC3080243E</b> <sup>1,1,**</sup>	65217	3000 PSI	8.0 GPM	HONDA® GX690*	UDOR® / Gear	48"	4.9 gal.	0°, 15°, 25°, and 40°	3/8" x 50', QC	13"
<b>SRC3080143E</b> <sup>1,**</sup>	65236	3000 PSI	8.0 GPM	CRX® 680*	UDOR® / Gear	48"	4.9 gal.	0°, 15°, 25°, and 40°	3/8" x 50', QC	13"
<b>SRC4060143E</b> <sup>1,1,**</sup>	65219	4000 PSI	6.0 GPM	CRX® 680*	UDOR® / Gear	48"	4.9 gal.	15°, 25°, 40°, and Soap	3/8" x 50', QC	13"
<b>SRC4060243E</b> <sup>1,**</sup>	65353	4000 PSI	6.0 GPM	HONDA® GX690*	UDOR® / Gear	48"	4.9 gal.	15°, 25°, 40°, and Soap	3/8" x 50', QC	13"
<b>SRC5040141E</b> <sup>1</sup>	65291	5000 PSI	4.0 GPM	CRX® 750*	UDOR® / Belt	47"	10.0 gal.	MEG: 15°, 25°, 40°, and Soap	3/8" x 50', NPT	13"
<b>SRC5050243E</b> <sup>1,1,**</sup>	65227	5000 PSI	5.0 GPM	HONDA® GX690*	UDOR® / Gear	47"	4.9 gal.	MEG: 15°, 25°, 40°, and Soap	3/8" x 50', NPT	13"
<b>SRC5050143E</b> <sup>1,**</sup>	65238	5000 PSI	5.0 GPM	CRX® 680*	UDOR® / Gear	47"	4.9 gal.	MEG: 15°, 25°, 40°, and Soap	3/8" x 50', NPT	13"
<b>SRC7040143E</b> <sup>1,**</sup>	65237	7000 PSI	4.0 GPM	CRX® 750*	UDOR® / Gear	47"	4.9 gal.	MEG: 15°, 25°, and 40°	3/8" x 50', NPT	13"
<b>SRC7040243E</b> <sup>1,**</sup>	65354	7000 PSI	4.0 GPM	HONDA® GX690*	UDOR® / Gear	47"	4.9 gal.	MEG: 15°, 25°, and 40°	3/8" x 50', NPT	13"

## PUMPS

### AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose

### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose



65291

## FRAME

### Steel Frame

- Full 360° protection
- Built-in extended run fuel tanks
- Lifting and hose mounting capabilities
- Durable and corrosion-resistant

## HOSES

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket
- Wrapped rubber hoses are dual-braided with 24-inch bend protectors

## TIRES

- Premium pneumatic or foam-filled tires for ease of maneuverability across various terrains

## NOZZLES

- (5) quick-connect nozzles for a variety of cleaning applications
- MEG nozzles with 1/4" MNPT connection (only on units 5000 PSI and above)

## ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
<b>CRX® 210</b>	208cc
<b>CRX® 275</b>	272cc
<b>CRX® 420</b>	420cc
<b>CRX® 680</b>	679cc
<b>CRX® 750</b>	750cc
<b>HONDA® GX200</b>	196cc
<b>HONDA® GX270</b>	270cc
<b>HONDA® GX390</b>	389cc
<b>HONDA® GX690</b>	688cc

## DIMENSIONS & WEIGHT

<b>65200</b>	L 31" x W 25" x H 29"   150 lbs.
<b>65202</b>	L 31" x W 27" x H 30"   150 lbs.
<b>65203</b>	L 38" x W 28" x H 33"   165 lbs.
<b>65206</b>	L 43" x W 28" x H 35"   179 lbs.
<b>65208, 65211</b>	L 38" x W 28" x H 33"   182 lbs.
<b>65209</b>	L 38" x W 28" x H 33"   194 lbs.
<b>65217, 65236</b>	L 48" x W 40" x H 24"   360 lbs.
<b>65219, 65353</b>	L 46" x W 30" x H 40"   370 lbs.
<b>65227, 65238</b>	L 46" x W 30" x H 40"   381 lbs.
<b>65237, 65354</b>	L 46" x W 30" x H 40"   400 lbs.
<b>65291</b>	L 46" x W 30" x H 40"   365 lbs.

<sup>◇</sup> ETL Certified Model.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\* Battery not included.

# TRUCK MOUNT SERIES

## INDUSTRIAL

Experience the ease of mobility with SIMPSON®'s truck-mounted pressure washers. Units are designed to be effortlessly transported to any job site. They provide a comprehensive cleaning solution that merges power with convenience. With SIMPSON's pressure washers, your work becomes simpler, more efficient, and you're always prepared for any task.

### UNIT INCLUDES

- Nozzles: 15°, 25°, and 40°

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80294	Two-gun system for use with 65251 and 65252 <ul style="list-style-type: none"> <li>• 6 nozzles: (2) 15°, (2) 25° and (2) 40°</li> <li>• Attachable nozzle-holder bracket</li> <li>• Plumbing hardware for two-hose discharge conversion</li> </ul>
80295	Two-gun system for use with 65253 and 65254 <ul style="list-style-type: none"> <li>• 6 nozzles: (2) 15°, (2) 25° and (2) 40°</li> <li>• Attachable nozzle-holder bracket</li> <li>• Plumbing hardware for two-hose discharge conversion</li> </ul>



**CRX** POWERED BY **HONDA**

MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	BASEPLATE	PRODUCT WEIGHT
<b>SMALL</b>							
MTM2810143E <sup>1</sup>	65422	2800 PSI	10.0 GPM	CRX® 750* / Key-start	UDOR® / Gear	Stainless Steel	200 lbs.
MTM2810243E <sup>1</sup>	65423	2800 PSI	10.0 GPM	HONDA® GX690* / Key-start	UDOR® / Gear	Stainless Steel	200 lbs.
MTM3050141E <sup>1</sup>	65416	3000 PSI	5.0 GPM	CRX® 420* / Key-start	UDOR® / Belt	Stainless Steel	210 lbs.
MTM3050241E <sup>1</sup>	65417	3000 PSI	5.0 GPM	HONDA® GX390* / Key-start	UDOR® / Belt	Stainless Steel	210 lbs.
MTM3080143E <sup>1</sup>	65420	3000 PSI	8.0 GPM	CRX® 680* / Key-start	UDOR® / Gear	Stainless Steel	200 lbs.
MTM3080243E <sup>1</sup>	65421	3000 PSI	8.0 GPM	HONDA® GX690* / Key-start	UDOR® / Gear	Stainless Steel	200 lbs.
<b>LARGE</b>							
TM2810141E <sup>1</sup>	65253	2800 PSI	10.0 GPM	CRX® 750* / Key-start	UDOR® / Belt	Aluminum	260 lbs.
TM2810241E <sup>1</sup>	65254	2800 PSI	10.0 GPM	HONDA® GX690* / Key-start	UDOR® / Belt	Aluminum	260 lbs.
TM3080141E <sup>1</sup>	65251	3000 PSI	8.0 GPM	CRX® 680* / Key-start	UDOR® / Belt	Aluminum	260 lbs.
TM3080241E <sup>1</sup>	65252	3000 PSI	8.0 GPM	HONDA® GX690* / Key-start	UDOR® / Belt	Aluminum	260 lbs.

### PUMP

#### UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### BASEPLATE

#### Stainless Steel Frame (Small)

- Durable and corrosion-resistant
- Rubber feet

#### Aircraft-Grade Aluminum Frame (Large)

- Light weight and corrosion-resistant
- Forklift slots
- Rubber feet

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 420	420cc
CRX® 680	679cc
CRX® 750	679cc
HONDA® GX390	389cc
HONDA® GX690	688cc

### DIMENSIONS

65251, 65252, 65253, 65254	L 38" x W 25" x H 24"
65416, 65417	L 35" x W 17" x H 22"
65420, 65421, 65422, 65423	L 30" x W 20" x H 22"

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

# SOFT WASH SERIES

## INDUSTRIAL

Introducing the all-new SIMPSON® Soft Wash System – the perfect solution for safely and efficiently cleaning delicate exterior surfaces. With up to 300 PSI and up to 12 GPM, it's designed for tasks like cleaning roofs, siding, windows, and hard-to-reach areas. The system uses low-pressure water combined with powerful cleaning solutions to effectively eliminate mold, mildew, moss, bacteria, and other microorganisms, leaving surfaces spotless and ensuring a long-lasting clean.

### LIMITED WARRANTY

65426, 65427, 65424, 65425, 65428	10-Year Frame, 2-Year Pump, 3-Year Engine
65442, 65443	10-Year Frame, 1-Year Pump, 3-Year Engine

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION	PART #	DESCRIPTION
80629	Wash Down Gun (8-9 GPM)	80631	100' Soft Wash Hose
80667	Wash Down Gun (10-12 GPM)	80632	200' Soft Wash Hose
80630	50' Soft Wash Hose		



65427



**CRX** POWERED by **HONDA**

MODEL #	PART #	MAX PRESSURE	MAX FLOW	ENGINE	PUMP / DRIVE	BASEPLATE	PRODUCT WEIGHT
SW380233E <sup>1</sup>	65426	300 PSI	8.0 GPM	HONDA® GX200* / Key-start	BPX25 / Gear	Stainless Steel	70 lbs.
SW380133E <sup>1</sup>	65427	300 PSI	8.0 GPM	CRX® 225* / Key-start	BPX25 / Gear	Stainless Steel	70 lbs.
SW310283E <sup>1</sup>	65442	300 PSI	10.0 GPM	HONDA® GX200* / Key-start	POLY2035 / Gear	Stainless Steel	70 lbs.
SW310183E <sup>1</sup>	65443	300 PSI	10.0 GPM	CRX® 225* / Key-start	POLY2035 / Gear	Stainless Steel	70 lbs.
SW312233E <sup>1</sup>	65424	300 PSI	12.0 GPM	HONDA® GX200* / Key-start	P40 / Gear	Stainless Steel	80 lbs.
SW312133E <sup>1</sup>	65425	300 PSI	12.0 GPM	CRX® 225* / Key-start	P40 / Gear	Stainless Steel	80 lbs.
SW312133 <sup>1</sup>	65428	300 PSI	12.0 GPM	HONDA® GX200* / Recoil	P40 / Gear	Stainless Steel	80 lbs.

### PUMPS

#### COMET BPX25 Industrial Diaphragm Pump

- 540 RPM
- 2 cylinder diaphragm pump
- Polypropylene/stainless steel body

#### COMET P40 Industrial Diaphragm Pump

- 550 RPM
- 3 cylinder diaphragm pump
- Polypropylene/stainless steel body

#### Bertolini POLY2035 Industrial Diaphragm Pump

- 650 RPM
- 2 cylinder diaphragm pump
- Polypropylene/stainless steel body

### BASEPLATE

#### Stainless Steel Frame

- Durable and corrosion-resistant
- Rubber feet

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
HONDA® GX200	196cc	0.8 gal.
CRX® 225	224cc	0.8 gal.

### DIMENSIONS

All Units L 28" x W 17" x H 17"

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.



**BUILT TOUGH TO  
GET THE JOB DONE**

# BRUTE SERIES

## INDUSTRIAL

Removing heavy grease, oil, salt, and algae can be a tough job, but SIMPSON®'s hot water line is up to the task. With performance ranging from a 1000 PSI Mini Brute to a 4000 PSI Diesel Super Brute, there's a SIMPSON hot-water machine ready to take on the toughest jobs no matter how big or small.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

**60363** 10-Year Frame, 5-Year Pump, 1-Year Motor

**65132, 65133, 65106, 65129, 65462** 10-Year Frame, 5-Year Pump, 3-Year Engine

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80657	Analog Thermostat Kit
80646	Steam Kit (Big Brute only)



60363



**CRX** POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE/MOTOR	PUMP / DRIVE	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	TIRES
---------	--------	----------	------	--------------	--------------	----------------------	----------------------	-------

### MINI BRUTE

<b>MNB1518012AAC1</b> <sup>1</sup>	60363	1000 PSI	1.8 GPM	1.5HP / 120V / 1Ø / 13A	AAA® / Direct	N/A	3.1 gal. Diesel	13"
------------------------------------	-------	----------	---------	-------------------------	---------------	-----	-----------------	-----

### KING BRUTE

<b>KB4040112EDC1</b> <sup>1,**</sup>	65132	4000 PSI	4.0 GPM	CRX® 420* Recoil / Key-start	AAA® / Direct	1.6 gal. Gasoline	5.0 gal. Diesel	13" with 2 Casters
--------------------------------------	-------	----------	---------	---------------------------------	---------------	-------------------	-----------------	--------------------

<b>KB4040252EDC1</b> <sup>1,**</sup>	65133	4000 PSI	4.0 GPM	HONDA® GX390* Recoil / Key-start	General Pump® / Direct	1.6 gal. Gasoline	5.0 gal. Diesel	13" with 2 Casters
--------------------------------------	-------	----------	---------	-------------------------------------	------------------------	-------------------	-----------------	--------------------

### BIG BRUTE

<b>BB4040233EDC1</b> <sup>1,**</sup>	65462	4000 PSI	4.0 GPM	HONDA® GX390* Recoil / Key-start	COMET / Gear	5.0 gal. Gasoline	10.0 gal. Diesel	10"
--------------------------------------	-------	----------	---------	-------------------------------------	--------------	-------------------	------------------	-----

<b>BB4040232EDC1</b> <sup>1,**</sup>	65106	4000 PSI	4.0 GPM	HONDA® GX390* Recoil / Key-start	COMET / Direct	5.0 gal. Gasoline	10.0 gal. Diesel	10"
--------------------------------------	-------	----------	---------	-------------------------------------	----------------	-------------------	------------------	-----

<b>BB4040132EDC1</b> <sup>1,**</sup>	65129	4000 PSI	4.0 GPM	CRX® 420* Recoil / Key-start	COMET / Direct	5.0 gal. Gasoline	10.0 gal. Diesel	10"
--------------------------------------	-------	----------	---------	---------------------------------	----------------	-------------------	------------------	-----

### PUMPS

#### AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose

#### General Pump® Industrial Triplex

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### COMET Industrial Triplex

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

#### Steel Frame

- Durable and corrosion-resistant

### HOSE

- The 3/8" x 50' Armor Hose® is a hot water steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable opaque polyurethane outer jacket

### TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### DIMENSIONS & WEIGHT

**60363** L 29" x W 34" x H 40" | 277 lbs.

**65132, 65133** L 42" x W 28" x H 48" | 375 lbs.

**65106, 65129, 65462** L 50" x W 32" x H 47" | 450 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\*Battery not included.

# BRUTE SERIES CONTINUED

## UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- High-Pressure Soap Injector

## LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine

## OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80657	Analog Thermostat Kit
80664	Steam Kit (Super Brute only)



65123



65449



MODEL #	PART #	PRESSURE	FLOW	ENGINE / START	PUMP / DRIVE	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	BURNER TYPE
<b>POWER BRUTE SERIES</b>								
PB3540242EDC1 <sup>1,**</sup>	65449	3500 PSI	4.0GPM	HONDA® GX390* / Key-start	UDOR® / Direct	1.6 gal. Gasoline	4.4 gal. Diesel	12VDC
PB4040142EDC1 <sup>1,**</sup>	65450	4000 PSI	4.0 GPM	CRX® 420* / Key-start	UDOR® / Direct	1.6 gal. Gasoline	4.4 gal. Diesel	12VDC
<b>SUPER BRUTE SERIES</b>								
SB3555251EDC1 <sup>1,**</sup>	65123	3500 PSI	5.5 GPM	HONDA® GX690* / Key-start	General Pump® / Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB3555131EDC1 <sup>1,**</sup>	65127	3500 PSI	5.5 GPM	CRX® 680* / Key-start	COMET / Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB3555231EDC1 <sup>1,**</sup>	65134	3500 PSI	5.5 GPM	HONDA® GX690* / Key-start	COMET / Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB3555151EDC1 <sup>1,**</sup>	65149	3500 PSI	5.5 GPM	CRX® 680* / Key-start	General Pump® / Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SBD4060441EDC1 <sup>1,**</sup>	65176	4000 PSI	6.0 GPM	KUBOTA® D902* Diesel	UDOR® / Belt	30 gal. Diesel (shared)		12VDC
<b>120V SUPER BRUTE SERIES</b>								
SB3550241EAC1 <sup>1,**</sup>	65277	3500 PSI	5.0 GPM	HONDA® GX690* / Key-start	UDOR® / Belt	7.5 gal. Gasoline	7.5 gal. Diesel	120VAC
SB4040211EAC1 <sup>1,**</sup>	65278	4000 PSI	4.0 GPM	HONDA® GX690* / Key-start	AAA® / Belt	7.5 gal. Gasoline	7.5 gal. Diesel	120VAC

## PUMPS

### General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### UDOR® Industrial Triplex Pump

- 3450 RPM full speed (Power Brute)
- 1750 RPM slow speed (Super Brute)
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### AAA® G-Series Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged-brass manifold
- Dual oil drain ports
- Thermal shock-resistant ceramic plunger sleeves
- External unloader with bypass hose
- Thermal relief valve

## FRAME

### Steel Frame

- Durable and corrosion-resistant

## HOSE

- 3/8" x 50' steel-braided Armor Hose®

## NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

## GENERATOR (65227 & 65278)

- 3400W of available power
- (1) 120V duplex outlet

## DIMENSIONS & WEIGHT

65449, 65450 L 45" x W 28" x H 47" | 515 lbs.

65123 L 46" x W 42" x H 37" | 625 lbs.

65127, 65149 L 46" x W 42" x H 37" | 639 lbs.

65134 L 46" x W 42" x H 37" | 663 lbs.

65277, 65278 L 46" x W 45" x H 37" | 690 lbs.

65176 L 48" x W 48" x H 45" | 1,050 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\*Battery not included.

# BRUTE SERIES CONTINUED

## UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25° and 40°
- Engine Oil 10W-30
- High-Pressure Soap Injector
- Auto Start/Stop Feature
- Time Delay (factory set at 30 seconds)

## LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 1-Year Motor

## OPTIONAL ACCESSORY (sold separately & available upon order)

PART #	DESCRIPTION
80656	Remote Box Kit 24V



65274



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU/HR	FUEL TYPE	PUMP / DRIVE
<b>MEGA BRUTE SERIES</b>							
MB3040011BNG	65270	3000 PSI	4.0 GPM	7.5 HP / 230V / 1Ø / 29A	312,000	Natural Gas	AAA® / Belt
MB3040011BLP	65274	3000 PSI	4.0 GPM	7.5 HP / 230V / 1Ø / 29A	312,000	Liquid Propane	AAA® / Belt
MB3040011GNG	65275	3000 PSI	4.0 GPM	7.5 HP / 208V / 3Ø / 21.4A	312,000	Natural Gas	AAA® / Belt
MB3040011GLP	65276	3000 PSI	4.0 GPM	7.5 HP / 208V / 3Ø / 21.4A	312,000	Liquid Propane	AAA® / Belt

## PUMP

### AAA® G-Series Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged-brass manifold
- Dual oil-drain ports
- Thermal shock-resistant ceramic plunger sleeves
- External unloader with bypass hose
- Thermal relief valve

## FRAME

### Steel Frame

- Durable and corrosion-resistant

## HOSE

- The 3/8" x 50' Armor Hose® is a hot water steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable opaque polyurethane outer jacket

## NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

## DIMENSIONS & WEIGHT

All Units L 30" x W 45" x H 42" | 636 lbs.



Control panel and on-board nozzles



Detergent siphon hose, quick-connect and garden hose connections

NOTE: Movable water inlet/outlet point (3 different locations - front, side, or back)

# RUGGED MOBILE TRAILERS FOR DEMANDING WORK ENVIRONMENTS





**RELIABLE ON-SITE  
WATER SUPPLY**

# SWT WATER TRAILER SERIES

## INDUSTRIAL



**95414AB**  
(Shown with 2" ball coupler and optional fire hose reel kit)



### LIMITED WARRANTY

All Units 1-Year Frame, 5-Year Pump, 3-Year Engine

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80282	2-5/16" Adjustable Ball Coupling Kit
80283	2" Adjustable Ball Coupling Kit
80285	Pintle-Eye Hitch Kit
80280	Includes a Heavy-Duty Hose Reel, 50' of 1" Rubber Fire Hose, a 1" Fire Hose Nozzle, Mounting Hardware and Plumbing

### SWT TRAILER SERIES – Must Select 2 Options – Add Options Suffixes to Trailer Part # (ex: 95414AB)

MODEL / PART #	CONFIGURATION PART #	ENGINE	PUMP	AXLE RATING	TRAILER SIZE	WATER TANK SIZE	TIRES	BRAKE TYPE
SWT525172HSB <sup>1</sup> 95414XX	See Configurations Below	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	525 gal.	ST225-75R15	Hydraulic
SWT525172EB <sup>1</sup> 95415XX	See Configurations Below	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	525 gal.	ST225-75R15	Electric

### COMING SOON - Q2 2026

SWT800172EB <sup>1</sup> 95426XX	See Configurations Below	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	800 gal.	ST225-75R15	Electric
SWT800172HSB <sup>1</sup> 95427XX	See Configurations Below	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	800 gal.	ST225-75R15	Hydraulic

### WATER TRAILER CONFIGURATION OPTIONS

(For more information on how to order, please contact your sales representative.)

OPTION SUFFIX (XX)	DESCRIPTION	EXAMPLE PART #
AA	2" Ball Coupler (80283) Only	95414AA
AB	2" Ball Coupler (80283) & Fire Hose Reel Kit (80280)	95414AB
BA	2-5/16" Ball Coupler (80282) Only	95414BA
BB	2-5/16" Ball Coupler (80282) & Fire Hose Reel Kit (80280)	95414BB
CA	Pintle-Eye Hitch Kit (80285) Only	95414CA
CB	Pintle-Eye Hitch Kit (80285) & Fire Hose Reel Kit (80280)	95414CB

### ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	0.8 gal.

### DIMENSIONS & WEIGHT

95414	L 153" (includes tongue) x W 87" x H 84" 2500 lbs. (7000 lbs. GVW)
95415	L 157" (includes tongue) x W 87" x H 84" 2500 lbs. (7000 lbs. GVW)
95426, 95427	Final dimensions and weight coming soon

### SPECIAL FEATURES

#### Semi-Trash Pump

- 2" suction and discharge that handles solids up to 9/16" diameter
- Cast-iron impeller and volute
- Silicon-carbide mechanical seals
- Die-cast aluminum pump housing
- Flow: 158 GPM
- Suction head lift: 25'

#### Plumbing

- Hydrant fill with 25" x 2-1/2" hose
- Dual rear spray heads
- Garden hose connector
- Simplified manifold discharge system
- Easy-to-operate flow control valves
- 20' suction hose
- 50' discharge hose

#### Water Tank

- Elliptical low profile 3/8-inch thick polyethylene
- 16" manhole with 4-inch vent and sump pump

#### Trailer

- NATM approved
- 6" C-channel
- 13" under-clearance at axle
- 5000 lb. side-mount crank jack
- Dual-leaf spring suspension
- LED lighting
- (2) safety chains with snap hooks
- Large rear storage basket
- Adjustable height hitch

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# COLD WATER SERIES

## INDUSTRIAL

SIMPSON®'s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailers, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.



95000

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 0°, 15°, 25°, 45°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 1-Year Frame, 5-Year Pump, 3-Year Engine



CRX<sup>®</sup> POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	TRAILER SIZE	WATER TANK SIZE	HOSE	TIRES
---------	--------	----------	------	--------	--------------	--------------	-----------------	------	-------

### STAGE 1A COLD WATER

TRSA3228262 <sup>1</sup>	95000	3200 PSI	2.8 GPM	HONDA <sup>®</sup> GX200*	CAT PUMPS <sup>®</sup> / Direct	8' Overall Length	100 gal.	3/8" x 50', QC	5.30-12
TRSA3228162 <sup>1</sup>	95129	3200 PSI	2.8 GPM	CRX <sup>®</sup> 225*	CAT PUMPS <sup>®</sup> / Direct	8' Overall Length	100 gal.	3/8" x 50', QC	5.30-12

### STAGE 1B COLD WATER

TRSB3835262 <sup>1</sup>	95001	3800 PSI	3.5 GPM	HONDA <sup>®</sup> GX270*	CAT PUMPS <sup>®</sup> / Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240262 <sup>1</sup>	95002	4200 PSI	4.0 GPM	HONDA <sup>®</sup> GX390*	CAT PUMPS <sup>®</sup> / Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240262E <sup>1**</sup>	95003	4200 PSI	4.0 GPM	HONDA <sup>®</sup> GX390* Recoil / Key-start	CAT PUMPS <sup>®</sup> / Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240162 <sup>1</sup>	95130	4200 PSI	4.0 GPM	CRX <sup>®</sup> 420*	CAT PUMPS <sup>®</sup> / Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240162E <sup>1**</sup>	95134	4200 PSI	4.0 GPM	CRX <sup>®</sup> 420* Recoil / Key-start	CAT PUMPS <sup>®</sup> / Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12

### PUMP

#### CAT PUMPS<sup>®</sup> Industrial Triplex

- Thermal relief valve
- Integrated with easy-start unloader

### ADDITIONAL SPECS

#### Trailer Frame

- Rectangular thick wall steel tubing

#### Axle Rating

- 2000 lbs

#### Lighting

- LED

#### Trailer Hitch Ball Size

- 2" Ball

#### Chemical Pail Holder

- Standard (Stage 1B only)

### HOSES

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket
- Hose Reel: 100'

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX <sup>®</sup> 225	224cc	0.8 gal.
CRX <sup>®</sup> 420	420cc	1.6 gal.
HONDA <sup>®</sup> GX200	196cc	0.8 gal.
HONDA <sup>®</sup> GX270	270cc	1.4 gal.
HONDA <sup>®</sup> GX390	389cc	1.6 gal.

### DIMENSIONS & WEIGHT

95000, 95129	L 98" (includes tongue) x W 68" x H 47" 750 lbs.
95001, 95002, 95130, 95003, 95134	L 106" (includes tongue) x W 65" x H 48" 900 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\*Battery not included.

# HOT WATER SERIES

## INDUSTRIAL

SIMPSON®'s hot water mobile pressure washing trailers deliver exceptional cleaning power for demanding commercial applications where cold water simply isn't enough. Built to cut through grease, oil, grime, and other stubborn contaminants, these products are suited for contract cleaners, mobile detailers, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system designed to perform wherever tough jobs need to be done.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 1-Year Trailer Frame, 5-Year Pump, 3-Year Engine

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80657	Analog Thermostat Kit
80646	Steam Kit (only for Stage 1C trailers)



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	TRAILER SIZE	AXLE RATING	WATER TANK SIZE	TIRE SPEC	BRAKE TYPE
<b>STAGE 1C HOT WATER</b>										
TRSC4040232E <sup>1</sup>	95005	4000 PSI	4.0 GPM	HONDA® GX390* Recoil / Key-start	COMET / Direct	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13	N/A
TRSC4040132E <sup>1</sup>	95016	4000 PSI	4.0 GPM	CRX® 420* Recoil / Key-start	COMET / Direct	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13	N/A
<b>STAGE 2 HOT WATER</b>										
TRS23555251E <sup>1</sup>	95158	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	General Pump® / Belt	13' Overall Length	3500 lbs.	225 gal.	ST205/75R14	Electric
TRS23555151E <sup>1</sup>	95166	3500 PSI	5.5 GPM	CRX® 680* / Key-start	General Pump® / Belt	13' Overall Length	3500 lbs.	225 gal.	ST205/75R14	Electric
<b>STAGE 3 HOT WATER</b>										
TRS33555231E <sup>1</sup>	95169	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	COMET / Belt	16' Overall Length	2 x 5200 lbs.	525 gal.	ST225/75R15	Electric
TRS33555251E <sup>1</sup>	95170	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	General Pump® / Belt	16' Overall Length	2 x 5200 lbs.	525 gal.	ST225/75R15	Electric
TRS33555131E <sup>1</sup>	95171	3500 PSI	5.5 GPM	CRX® 680* Key-start	COMET / Belt	16' Overall Length	2 x 5200 lbs.	525 gal.	ST225/75R15	Electric
TRS33555151E <sup>1</sup>	95173	3500 PSI	5.5 GPM	CRX® 680* Key-start	General Pump® / Belt	16' Overall Length	2 x 5200 lbs.	525 gal.	ST225/75R15	Electric
TRS3D4060441E <sup>1</sup>	95156	4000 PSI	6.0 GPM	KUBOTA® D902 Key-start	UDOR® / Belt	16' Overall Length	2 x 5200 lbs	525 gal.	ST225/75R15	Hydraulic
TRS33550241EAC1 <sup>1</sup>	95157	3500 PSI	5.0 GPM	HONDA® GX690 Key-start	UDOR® / Belt	16' Overall Length	2 x 5200 lbs	525 gal.	ST225/75R15	Hydraulic

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# HOT WATER SERIES CONTINUED

## PUMPS

### COMET Industrial Triplex

- 3450 RPM full speed (stage 1)
- 1750 RPM slow speed (stage 2 & 3)
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

### General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

### UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

## HOSES

### Steel-braided Armor Hose®

- Sizes:  
3/8" x 100

### Supply Hose

- Sizes:  
3/8" x 75' – **Stage 1C**  
3/8" x 90' – **Stage 2s and 3s**

### High-Pressure Hose Reel

- Sizes:  
100' – **Stage 1Cs**  
200' – **Stage 2s and 3s**

## ADDITIONAL SPECS

### Trailer Frame

- 6" powder-coated C-channel

### Lighting

- LED

### Trailer Hitch Ball Size

- 2" ball for stage 1C and 2
- 2-5/16" ball for stage 3 trailers

### 120V Burner (95157 only)

- 3400W generator
- 120V duplex outlet




Refer to page 37  
for hose reels

## ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	7.5 gal.
CRX® 680	679cc	7.5 gal.
HONDA® GX390	389cc	7.5 gal.
HONDA® GX690	688cc	7.5 gal.

## DIMENSIONS & WEIGHT

95005, 95016	L 108" (includes tongue) x W 68" x H 69" 1300 lbs.
95158, 95166	L 156" (includes tongue) x W 68" x H 62" 1500 lbs.
95157, 95169, 95170, 95171, 95173	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.
95156	L 192" (includes tongue) x W 90" x H 62" 3800 lbs.

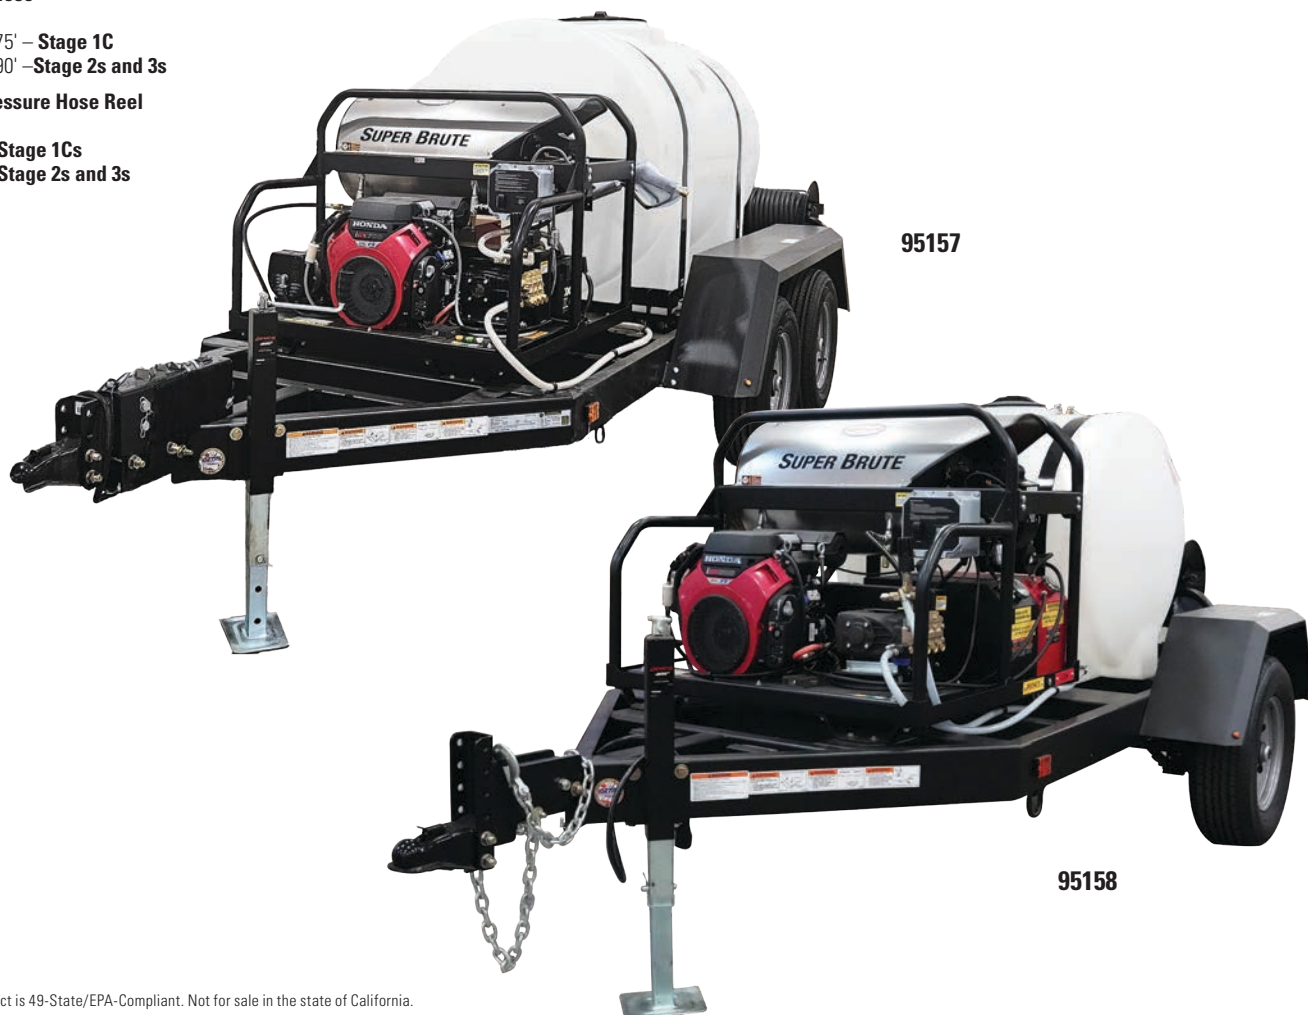

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# POWER & RELIABILITY WHEN YOU NEED IT MOST



# SIMPSON GENERATORS

Boasting a larger size, enhanced durability, and the ability to generate a superior power output, SIMPSON® Commercial generators are the ideal choice for energizing job sites. They also serve as a reliable source of backup electricity during power outages, ensuring uninterrupted power supply when you need it most.



70134

## LIMITED WARRANTY

**All Units** 3-Year Residential, 6-Month Commercial

MODEL #	PART #	ENGINE	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	WHEEL	RUN TIME @ 25% LOAD	dBA @ 25% LOAD @ 7M +
SF5568 <sup>1</sup>	70132	SIMPSON® R290	6875	5500	120/240V	60Hz	20A	Automatic	8" Foam Filled	9 Hours	72-75
SF7796 <sup>1</sup>	70134	SIMPSON® R420	9625	7700	120/240V	60Hz	29A	Automatic	10" Foam Filled	9 Hours	73-76
SF1012 <sup>1</sup>	70136	SIMPSON® R500	12500	10000	120/240V	60Hz	38A	Automatic	10" Foam Filled	9 Hours	75-78

## ENGINES LOW OIL SHUTDOWN

PART#	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70132	SIMPSON® R290	292cc	Recoil / Key-start	5.5 gal. Gasoline
70134	SIMPSON® R420	420cc	Recoil / Key-start	7.1 gal. Gasoline
70136	SIMPSON® R500	500cc	Recoil / Key-start	7.1 gal. Gasoline

## DIMENSIONS & WEIGHT

70132	L 24" x W 20" x H 21"   125 lbs.
70134	L 29" x W 23" x H 23"   175 lbs.
70136	L 29" x W 25" x H 24"   215 lbs.

## ADDITIONAL SPECS

### All Units

- Low-oil shutdown
- GFCI protection
- Battery included
- Safe-T-Sense CO monitor

### 70136

- Dual Fuel Capable (Gasoline/Liquid Propane)

## AVAILABLE OUTLETS (70132, 70134)

(NEMA 5-20R) 2x 120V GFCI	(NEMA L5-30R) 1x 120V	(NEMA L14-30R) 1x 120/240V

## (70136)

(NEMA 5-20R) 2x 120V GFCI	(NEMA L5-30R) 1x 120V	(NEMA 14-50R) 1x 120/240V

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

+ Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M).

# SCGH SERIES

## INDUSTRIAL

With their impressive durability and superior power output, SIMPSON® industrial generators are the perfect solution for powering up job sites. They also act as a dependable backup electricity source during power outages, guaranteeing a continuous power supply when it's crucial. Experience the reliability and power of SIMPSON Industrial generators when you need it the most.

### LIMITED WARRANTY

All Units 3-Year Commercial

### SPECIAL FEATURES

- Heavy-duty welded steel frame with powder-coated finish
- Welded lifting handle
- Premium HONDA® engines
- Lifting hook
- V-mount vibration isolation system
- Auto idle down
- UL listed receptacles
- Weather-resistant outlet covers
- Easily accessible control panel
- High-quality 100% copper-wound brushless alternator
- Premium never-flat wheels



POWERED by HONDA



MODEL #	PART #	ENGINE	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	WHEEL	RUN TIME @ 25% LOAD	dBA @ 25% LOAD @ 7M <sup>+</sup>
SCGH2500 <sup>1,2</sup>	70082	HONDA® GX200*	2500	2250	120V	60Hz	10A	Capacitor	N/A	14 Hours	72
SCGH5500 <sup>1,2</sup>	70053	HONDA® GX270*	5500	4500	120/240V	60Hz	15A	Capacitor	10" Foam Filled	17 Hours	72
SCGH8500 <sup>1,2</sup>	70054	HONDA® GX390*	8500	7000	120/240V	60Hz	30A	Capacitor	10" Foam Filled	12 Hours	74
SCGH8500E <sup>1,2</sup>	70055	HONDA® GX390*	8500	7000	120/240V	60Hz	30A	Capacitor	10" Foam Filled	12 Hours	74

### ADDITIONAL SPECS

- Low-oil shutdown
- GFCI protection
- 12V battery included (70055 only)
- Power Selector (70082 only)  
Choose between 10A from both outlets or 20A from one outlet

### CIRCUIT BREAKERS

<b>70082</b>	(1) 10A Main Circuit Breaker, Double Pole	
<b>70053</b>	(1) 15A Main Circuit Breaker, Double Pole	
<b>70054, 70055</b>	(1) 30A Main Circuit Breaker, Double Pole	(2) 20A Thermal Circuit Breakers, Single Pole

### AVAILABLE OUTLETS (70053, 70054, 70055)

(NEMA 5-20R) 2x 120V GFCI	(NEMA L5-30R) 1x 120V	(NEMA L14-30R) 1x 120/240V

### (70082)

(NEMA 5-20R) 2x 120V GFCI

### ENGINES LOW OIL SHUTDOWN

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
<b>70082</b>	HONDA® GX200	196cc	Recoil	3.1 gal.
<b>70053</b>	HONDA® GX270	270cc	Recoil	7.9 gal.
<b>70054</b>	HONDA® GX390	389cc	Recoil	7.9 gal.
<b>70055</b>	HONDA® GX390	389cc	Recoil / Key-start	7.9 gal.

### DIMENSIONS & WEIGHT

<b>70082</b>	L 25" x W 19" x H 19"   70 lbs.
<b>70053</b>	L 30.25" x W 25" x H 27"   151 lbs.
<b>70054</b>	L 30.25" x W 25" x H 27"   175 lbs.
<b>70055</b>	L 30.25" x W 25" x H 27"   182 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

<sup>2</sup> Wheels Standard

\* Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

+ Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M).

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# SCGH SERIES CONTINUED



**70098**

Shown with optional wheel and handle kit (80298)



POWERED by **HONDA**



MODEL #	PART#	ENGINE	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	RUN TIME @ 25% LOAD	dBA @ 25% LOAD @ 7M +
SCGH10000E <sup>1</sup>	70098	HONDA® GX630 <sup>2</sup>	10000	9000	120/240V	60Hz	43A	Capacitor	22.5 Hours	73
SCGH12000E <sup>1</sup>	70111	HONDA® GX690 <sup>2</sup>	12000	11000	120/240V	60Hz	47A	Capacitor	20 Hours	73

## ADDITIONAL SPECS

- Low-oil shutdown
- GFCI protection
- CSA certified

## ENGINES LOW OIL SHUTDOWN

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70098	HONDA® GX630	688cc	Key-start	9.0 gal.
70111	HONDA® GX690	688cc	Key-start	9.0 gal.

## DIMENSIONS & WEIGHT

70098, 70111 L 40" x W 25" x H 31" | 400 lbs.

## OPTIONAL ACCESSORIES

- 80298** - Handle and wheel kit (for models 70098, 70111)  
 (4) 13" Pneumatic wheels

## CIRCUIT BREAKERS

<b>70098</b>	(1) 43A Main Circuit Breaker, Double Pole	(2) 20A Thermal Circuit Breakers, Single Pole	(3) 30A Thermal Circuit Breakers, Single Pole
<b>70111</b>	(1) 47A Main Circuit Breaker, Double Pole	(2) 20A Thermal Circuit Breakers, Single Pole	(3) 30A Thermal Circuit Breakers, Single Pole

## AVAILABLE OUTLETS (70098, 70111)

(NEMA 5-20R) 2x 120V GFCI	(NEMA L5-30R) 1x 120V	(NEMA L14-30R) 1x 120/240V	(NEMA 14-50R) 1x 120/240V

<sup>2</sup> Wheels Standard

± Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

+ Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M).

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# SIMPSON INVERTERS

## PROFESSIONAL

**EQUIPPED WITH GFCI PROTECTION!**

Designed to be smaller, lighter, quieter, and provide a more stable power supply than a conventional generator, our inverter generators are the perfect way to power a jobsite or run sensitive electronic devices like TVs and computers.

### LIMITED WARRANTY

**70123** 3-Year Consumer, 1-Year Commercial

### SPECIAL FEATURES

- Safe-T-Sense CO monitor
- Dual Fuel Capable (Gas/LP) (70137 & 70126 only)
- TT-30R to L5-30R Adapter Included (70137 & 70126 only)



**70137**

**70123**

**CRX**

MODEL #	PART #	STARTING WATTS	RUNNING WATTS <sup>±</sup>	AC VOLTAGE	AC FREQUENCY	OVERLOAD AMPERAGE	RUN TIME @ 25% LOAD	dBA @ 25% LOAD @ 7M <sup>+</sup>
<b>SIG2320</b> <sup>1</sup>	70123	2300	2000	120V	60Hz	17A MAX	10 Hours	53
<b>SGS3543</b> <sup>1</sup>	70127	4375	3500	120V	60Hz	32A MAX	6.5 Hours	61
<b>SGS4252</b> <sup>1</sup>	70126	5250	4200	120V	60Hz	35A MAX	10 Hours	65
<b>SGS7796</b> <sup>1</sup>	70137	9625	7700	120/240V	60Hz	32A MAX	13.5 Hours	64


### ENGINE LOW OIL SHUTDOWN

PART #	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
<b>70123</b>	CRX®	79cc	Recoil	1.1 gal. Gasoline
<b>70127</b>	SIMPSON®	181cc	Recoil	1.2 gal. Gasoline
<b>70126</b>	SIMPSON®	181cc	Recoil / Electric	2 gal. Gasoline
<b>70137</b>	SIMPSON®	420cc	Recoil / Electric	5.3 gal. Gasoline



### DIMENSIONS & WEIGHT

<b>70123</b>	L 20" x W 12" x H 18"   46 lbs.
<b>70127</b>	L 20" x W 12" x H 18"   55 lbs.
<b>70126</b>	L 22" x W 15" x H 20"   70 lbs.
<b>70137</b>	L 35" x W 29" x H 27"   205 lbs.

### AVAILABLE OUTLETS (70123) (70127 & 70126)

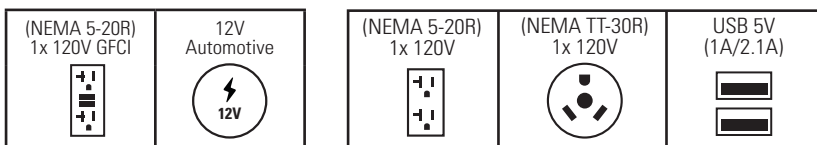

### (70137)

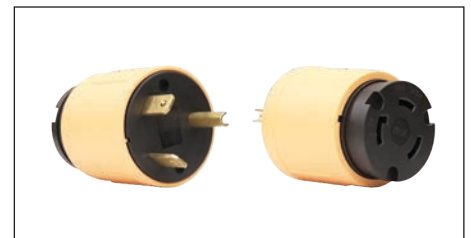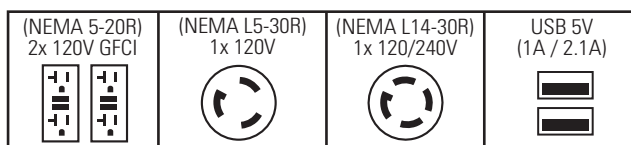

TT-30R to L5-30R Adapter, Front & Back (70137 & 70126 only)

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.  
<sup>±</sup> Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

# COMPRESSOR/WELDER/ GENERATOR

## PROFESSIONAL

The SIMPSON® Compressor/Welder/Generator offers versatility for job sites, service trucks, or emergencies. It features a 16 CFM compressor, 5,000-watt generator, 240-Amp welder, and a reliable CRX® 420 engine for dependable, professional-grade performance.

### LIMITED WARRANTY

73001 1-Year

### SPECIAL FEATURES

- Heavy-duty 2-stage cast iron pump
- Bearings on both ends of pump crank shaft
- Needle bearings at wrist pin on pump
- Industrial-grade electric start drive engine
- Pilot valve for continuous operation
- Fully-enclosed belt guard
- Full-saddle mounting feet
- Alternator on drive engine
- 120/220V outlets
- Stainless steel flex air lines
- Vibration isolation mounts
- Belt tension mount for all drive belts



71003



**CRX**

MODEL #	PART #	ENGINE	DRIVE	COMPRESSOR PERFORMANCE	COMPRESSOR TANK CAPACITY	WELDER AMPERAGE	GENERATOR OUTPUT	GENERATOR VOLTAGE	GENERATOR AMPERAGE
CWG16C240A5KW <sup>1</sup>	73001	CRX 420* Key-start	Belt	16 CFM @ 175 PS	30 gal.	240A DC	5000 WATTS	240A DC	41A (@ 120V) 20A (@ 240V)

### ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.

### AVAILABLE OUTLETS (73001)

(NEMA 5-20R) 1x 120V GFCI	(NEMA L14-30R) 1x 120/240V
	

### DIMENSIONS & WEIGHT

71003 L 44" x W 24" x H 40" | 450 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# WATER PUMP SERIES

## PROFESSIONAL

Engineered to handle water containing mud, sand, leaves, twigs, and other contaminants, SIMPSON®'s water pumps are perfect for clearing wastewater from residential, municipal, and industrial sites. Easy to transport, use, and clean, SIMPSON's water pumps will get the job done no matter where you need them.

**PORTABLE**



71007

**CRX**

### UNIT INCLUDES

71007	71009	71010
<ul style="list-style-type: none"> <li>• (2) Hose Barbs</li> <li>• (1) Spark Plug Wrench</li> <li>• (1) Strainer</li> <li>• (2) Hose Barb Coupler</li> <li>• (2) Gasket</li> <li>• (3) 2" Hose Clamp</li> </ul>	<ul style="list-style-type: none"> <li>• (2) Hose Barbs</li> <li>• (1) Spark Plug Wrench</li> <li>• (2) Hose Barb Coupler</li> <li>• (2) Gasket</li> <li>• (3) 2" Hose Clamp</li> </ul>	<ul style="list-style-type: none"> <li>• (2) Hose Barbs</li> <li>• (1) Spark Plug Wrench</li> <li>• (1) Strainer</li> <li>• (2) Hose Barb Coupler</li> <li>• (2) Gasket</li> <li>• (3) 3" Hose Clamp</li> </ul>

### LIMITED WARRANTY

All Units 3-Year

MODEL #	PART #	PUMP	ENGINE	START	FLOW	INLET/OUTLET DIAMETER	SUCTION HEAD LIFT	TOTAL HEAD LIFT
SSTP71007 <sup>1</sup>	71007	2" Semi-Trash	CRX® 210*	Recoil	158 GPM	2"	25'	98'
SCP71009 <sup>1</sup>	71009	2" Chemical	CRX® 210*	Recoil	195 GPM	2"	25'	98'
SSTP71010 <sup>1</sup>	71010	3" Semi-Trash	CRX® 210*	Recoil	285 GPM	3"	26'	85'

### PUMPS

#### 2" and 3" Semi-Trash Pump

- Die-cast aluminum pump housing
- Easy-access quick clean out
- Silicon-carbide mechanical seal
- Cast-iron impeller and volute
- Debris up to 9/16"

#### 2" Chemical Pump

- Fiber-reinforced polymer pump housing
- Easy-access quick clean out
- Ceramic-carbide mechanical seal
- Fiber-reinforced polymer impeller and volute

### FRAME

#### Steel Frame (71007, 71010 only)

- Full 360° protection
- Lifting capabilities
- Durable and corrosion-resistant

### ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	0.8 gal.

### DIMENSIONS & WEIGHT

71007, 71010	L 20" x W 18" x H 20"   65 lbs.
71009	L 20" x W 17" x H 16"   43 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# CARPET EXPRESS

## PROFESSIONAL

The SIMPSON® Carpet Express® combines exceptional cleaning power with advanced Quick Dry technology for outstanding results and rapid drying. It effectively tackles deeply embedded dirt, tough stains, and odors, making it ideal for both high-traffic areas and everyday use.

### LIMITED WARRANTY

All Units 1-Year

### OPTIONAL ACCESSORIES & CLEANING DETERGENTS

PART #	DESCRIPTION	CASE PACK PART #	QUANTITY
80595	Extraction Hand Tool Kit	N/A	N/A
80557	SpotVortex Tool	80640	6
80600	24 oz. SpotVortex Spot Spray	80567	12
80638	24 oz. Spot & Odor Pet Spray	80589	12
80636	24 oz. 7-in-1 High Traffic Spray	80574	12
80605	32 oz. 7-in-1 Carpet Care Pet Formula	80573	12
80606	64 oz. 7-in-1 Carpet Care Pet Formula	80572	8
80604	128 oz. 7-in-1 Carpet Care Pet Formula	80571	4
80637	32 oz. 7-in-1 Carpet Care Pro Formula	80585	12
80608	64 oz. 7-in-1 Carpet Care Pro Formula	80586	8
80607	128 oz. 7-in-1 Carpet Care Pro Formula	80587	4

31002SIM



PART #	PRESSURE	FLOW	RECOVERY TANK CAPACITY	DETERGENT TANK CAPACITY	BRUSH MOTOR	VACUUM MOTOR
--------	----------	------	------------------------	-------------------------	-------------	--------------

31002SIM	35 PSI	0.85 GPM	4.0 gal.	4.0 gal.	2500 RPM Permanent Magnate DC	Ametek High-Performance 2-Stage
----------	--------	----------	----------	----------	----------------------------------	------------------------------------

### SPECIAL FEATURES

- Heavy-duty 2-stage cast iron pump
- Bearings on both ends of pump crank shaft
- Needle bearings at wrist pin on pump
- Industrial-grade electric start drive engine
- Pilot valve for continuous operation
- Fully enclosed belt guard
- Full-saddle mounting feet
- Alternator on drive engine
- 120/220V outlets
- Stainless steel flex air lines
- Vibration isolation mounts
- Belt tension mount for all drive belts

### DIMENSIONS & WEIGHT

31002SIM L 20" x W 12" x H 25" | 46 lbs.



**ACCESSORIES  
THAT UPGRADE  
YOUR CLEAN WITH  
CONFIDENCE**



# HIGH-PERFORMANCE HOSES

**M22 ADAPTER INCLUDED**  
WITH MORFLEX® HOSES

Used to connect multiple hoses with standard M22 connections



## MORFLEX® HOSE SERIES



Engineered for maximum flexibility and kink resistance, this hose features a durable, non-marring, and abrasion-resistant polyurethane jacket. It includes 4-inch bend protectors for added durability and is compatible with most gas and electric pressure washers up to 3,700 PSI, thanks to its standard M22 threaded connections.



**Max Temp:** 140° F

**Inner Material:** Polyester

**Outer Material:** Polyurethane with 4" Bend Protectors

**Fittings:** M22 x M22

**Terminated:** N/A

## MONSTER HOSE SERIES



Designed for cold water up to 140°F, this hose features a dual-braided steel over polyester construction for durability. Its flexible, non-marring, translucent polyurethane jacket is thrice as abrasion-resistant as rubber. Withstanding up to 4500 PSI, it fits most pressure washers with 3/8" quick connect fittings.



**Max Temp:** 140° F

**Inner Material:** Polyester & Steel-braided

**Outer Material:** Polyurethane with 4" Bend Protectors

**Fittings:** Brass QC Socket x Steel QC Plug

**Terminated:**

41113, 41030 – Steel Solid MNPT x Steel Solid MNPT

41028 – Brass Solid QC Socket x Steel Solid QC Plug

## ARMOR HOSE® SERIES



Built for high-temperature applications up to 250°F, boasts a durable dual-braided steel over polyester construction. Its flexible, non-marring, opaque polyurethane jacket is abrasion-resistant. Compatible with hot and cold water, it fits most commercial gas pressure washers with 3/8" quick connect fittings, handling up to 4500 PSI.



**Max Temp:** 250° F

**Inner Material:** Polyester & Steel-braided

**Outer Material:** Polyurethane with 4" Bend Protectors

**Fittings:** Brass QC Socket x Steel QC Plug

**Terminated:** Steel Solid MNPT x Steel Solid MNPT

## WRAPPED RUBBER HOSE SERIES

Designed for industrial and commercial use, this heavy-duty hose features single or dual-braided technology with a wrapped rubber outer jacket and 24" bend protectors for longevity. Rated for temperatures up to 250°F and pressures from 4,500 to 10,000 PSI, it's compatible with 3/8" quick connect pressure washers.



**Max Temp:** 250° F

**Inner Material:**

41183 – R1 Steel-braided

All Others – R2 Steel-braided

**Outer Material:**

41183 – Wrapped Rubber with 6" Bend Protectors

All Others – Wrapped Rubber with 24" Bend Protectors

**Fittings:**

41183 – Brass QC Socket x Steel QC Plug

All Others – SS QC Socket x SS QC Plug

**Terminated:** Steel 3/8" Rigid MNPT x

Steel 3/8" Swivel MNPT

## SOFT WASH HOSE SERIES



SIMPSON® Soft Wash hoses are expertly engineered for compatibility with the Soft Wash and Dual Wash Series pressure washers. Constructed from high-quality, durable PVC, these hoses offer exceptional resistance to chemicals and corrosion, ensuring reliable performance and long-lasting durability.



**Max Temp:** 140° F

**Max PSI:** 300

**Material:** PVC

**Fittings:** 1/2" MNPT and ferrule

PART #	PRESSURE	ID x LENGTH
40224 <sup>4</sup>	3300 PSI	1/4" x 25'
40225 <sup>4</sup>	3700 PSI	5/16" x 25'
40226 <sup>4</sup>	3700 PSI	5/16" x 50'

PART #	PRESSURE	ID x LENGTH
41113	4500 PSI	3/8" x 25'
41028 <sup>4</sup>	4500 PSI	3/8" x 50'
41030	4500 PSI	3/8" x 100'
41032	4500 PSI	3/8" x 150'
41034	4500 PSI	3/8" x 200'

PART #	PRESSURE	ID x LENGTH
41114 (41095) <sup>4</sup>	4500 PSI	3/8" x 50'
41096	4500 PSI	3/8" x 100'
41115	4500 PSI	3/8" x 200'

PART #	PRESSURE	ID x LENGTH
41183	4500 PSI	3/8" x 50'
41184	8000 PSI	3/8" x 50'
41185	8000 PSI	3/8" x 100'
41186	8000 PSI	3/8" x 200'
41187	10000 PSI	3/8" x 50'
41188	10000 PSI	3/8" x 100'
41189	10000 PSI	3/8" x 200'
41190	10000 PSI	1/2" x 50'
41191	10000 PSI	1/2" x 100'
41192	10000 PSI	1/2" x 200'

PART #	PRESSURE	ID x LENGTH
80630	300 PSI	1/2" x 50'
80631	300 PSI	1/2" x 100'
80632	300 PSI	1/2" x 200'

## LIMITED WARRANTY

All Hoses 90-day

<sup>4</sup> Shipped in retail packaging

# PREMIUM ACCESSORIES



DESCRIPTION	PART #	PRESSURE	FLOW	MAX TEMP	INLET CONNECTION	OUTLET CONNECTION
Front-Load Trigger Gun	80147	3400 PSI	8.0 GPM	140° F	M22 Male Hose Connect	M22 Female
360° Swivel Side-Assist Trigger Gun	80148	4500 PSI	6.6 GPM	140° F	M22 Male Hose Connect with Included Female M22 x QC Plug Adapter	M22 Female
Hot-Water Trigger Gun	80178	5075 PSI	12.0 GPM	212° F	3/8" FNPT Hose Connect with Included 3/8" MNPT x M22 Male, & 3/8" MNPT x QC Plug adapters	1/4" FNPT
Wash Down Trigger Gun	80629	350 PSI	8-9 GPM	140° F	1/2" BSPP(M) Hose Connect	N/A
Wash Down Trigger Gun	80667	350 PSI	10-12 GPM	140° F	1/2" BSPP(M) Hose Connect	N/A
16" Spray Wand	80149	3600 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect
31" Spray Wand	80479	4500 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect
48" Insulated Wand	80179	5075 PSI	N/A	212° F	1/4" MNPT Spray Gun Connect	1/4" QC Socket Nozzle Connect
18' Telescoping Wand	80470	4000 PSI	N/A	140° F	3/8" QC Plug Spray Gun Connect	1/4" QC Socket Nozzle Connect



## DIAL-N-WASH

**PART #: 82232**  
**Max Pressure:** 4500 PSI  
**Max Flow:** 4.0 GPM  
**Max Temp:** 140° F  
**Inlet - Spray Gun Connect:** M22 Male  
**Outlet - Lance Connect:** M22 Female  
**Price:** \$19.86



## O-RING & FILTER KIT

**PART #: 80151**  
**Two Filters:** (2) 25.0mm OD  
**Two O-ring Sets:** (2) 18.0mm OD, (2) 15.0mm OD,  
(2) 15.6mm OD, (2) 14.0mm OD, (2) 14.0mm OD  
**Price:** \$4.58

## FOAM CANNON

**PART #: 80271**  
**Min Pressure:** 1600 PSI  
**Max Pressure:** 4000 PSI  
**Max Temp:** 140° F  
**Lance Connect:** 1/4" QC Plug  
**Price:** \$46.98



## NOZZLES

DESCRIPTION	PART #	PRESSURE	MAX TEMP	NOZZLE SIZE	LANCE CONNECTION
5-Pack: 0°, 15°, 25°, 40° and Soap	80145	3600 PSI	212° F	3.0, Soap	1/4" QC Plug
5-Pack: 0°, 15°, 25°, 40° and Soap	80146	4500 PSI	212° F	4.0, Soap	1/4" QC Plug
2nd Story: Wash and Soap	80177	5000 PSI	212° F	10.0, 40.0	1/4" QC Plug
5-N-1: 0°, 15°, 25°, 40° and Soap	80142	3600 PSI	140° F	2.8-3.2, Soap	1/4" QC Plug
Turbo	80143	3600 PSI	212° F	3.0	1/4" QC Plug
Turbo	80144	4500 PSI	212° F	4.0	1/4" QC Plug



DESCRIPTION	PART #	CONTENT AMOUNT
15w40 Pump Oil	80138	16oz
Pump Guard - Aerosol	80273	4oz



## HOSE REELS

DESCRIPTION	PART #	PRESSURE	MAX TEMP	HOSE CAPACITY
Manual Hose Reel – 100'	80399	5000 PSI	212° F	100' x 3/8"
Manual Hose Reel – 100' or 125'	80490	5000 PSI	212° F	3/8" x 100' or 1/4" x 125'
Manual Hose Reel – 200'	80403	5000 PSI	212° F	3/8" x 200'
Portable Hose Reel – 100' or 125'	80401	5000 PSI	212° F	3/8" x 100' or 1/4" x 125'



## SURFACE CLEANERS

DESCRIPTION	PART #	MAX FLOW	MAX PRESSURE	MAX TEMP	CONNECTION	MATERIAL	FILTER
15" Surface Cleaner	80299	3.4 GPM	3700 PSI	140° F	1/4" QC Plug Inlet Lance Connect	Powder Coated Steel	N/A
20" Commercial Surface Cleaner w/Handle	80182	3.8 GPM	4500 PSI	212° F	3/8" QC Plug Inlet Hose Connect	Heavy-Duty ABS	High-Pressure Inlet
16.5" Surface Cleaner	80625	4.0 GPM	4000 PSI	140° F	1/4" QC Plug Inlet Lance Connect	Stainless Steel	High-Pressure Inlet



# PROFESSIONAL CLEANING DETERGENTS

## VITAL OXIDE

Vital Oxide is an EPA-registered disinfectant that kills mold, eliminates odors, and is ready-to-use, safe, and non-corrosive.

### VITAL OXIDE IN ACTION

- Used in emergency response to eliminate Norovirus outbreaks
- Clinical trials have shown a decrease of 95% in healthcare associated infections (HAI'S) of Acinetobacter spp. in hospital environment
- Used in disaster response to eliminate mold and mildew from flood damage
- University and government-sponsored studies document long-term effectiveness on mold and mold spores, even eliminating mold spores

PART #	CONTENTS AMOUNT
82245	5 gal. Pail
82246*	15 gal. Drum
82247*	55 gal. Drum
82248*	261 gal. Tote

\* - Shipping times vary due to availability. Contact your sales rep for more information



## CLEANING DETERGENTS

SIMPSON® pressure washer cleaners enhance performance with heavy-duty, biodegradable formulas, cutting grease, removing stains, and tackling mold/mildew.

### FOR USE ON MULTIPLE SURFACES

- Industrial sites and exterior surfaces
- Tough stains on brick, siding, and concrete
- Commercial equipment and vehicle fleet
- Grease and grime
- Decks, fences, patio, vehicles, bikes, RVs, and outdoor furniture

PART #	USE	CONTENTS AMOUNT
88283	Natural Green Formula	1 gal.
88281	Multi-Purpose	1 gal.
88282	Heavy-Duty	1 gal.

The Green Formula is a safe, eco-friendly, and biodegradable cleaning solution, free from harsh chemicals.



## HEAVY-DUTY DETERGENT PACS

SIMPSON® heavy-duty detergent pacs are safe to use with all pressure washers and can be used on multiple surfaces.

PART #	CONTENTS AMOUNT
80597	10 Single-use Pacs



# PREMIUM PUMPS & UNLOADER KITS



## AAA® INDUSTRIAL TRIPLEX PUMPS

SIMPSON® offers AAA® Industrial Triplex Pumps, that contain premium seals, high-strength bearings, and corrosion-resistant materials that are made to provide a long service life. Many models feature technologies such as Easy Start and PowerBoost®, making AAA pumps powerful and easy to use.

### AAA® PUMP KITS INCLUDE

- Mounting hardware (nuts & bolts)
- Crankshaft key
- Chemical siphon hose with filter

### LIMITED WARRANTY

90066, 90067, 90068	7-Year
90038, 90039, 90034 90036, 90037, 90058, 90057, 90056, 90066, 90068	5-Year
80362, 80361, 80404, 80405	90 Days



90039



90058



90037



90067

### AAA® PUMP KITS

PART #	PRESSURE	FLOW	MANIFOLD	UNLOADER	SHAFT SIZE	SPEED	OUTLET
90036	<b>POWER BOOST</b> 3200 PSI	2.8 GPM	Brass	Integrated w/Easy Start	3/4"	3450 RPM	M22
90037	<b>POWER BOOST</b> 3700 PSI	2.5 GPM	Brass	Integrated w/Easy Start	3/4"	3450 RPM	M22
90038	<b>POWER BOOST</b> 3800 PSI	3.5 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90039	<b>POWER BOOST</b> 4000 PSI	3.5 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90034	<b>POWER BOOST</b> 4400 PSI	4.0 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90056	3000 PSI	3.0 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC
90058	3300 PSI	3.2 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC
90057	3500 PSI	4.0 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC

### AAA® G SERIES

PART #	PRESSURE	FLOW	MANIFOLD	HP/KW	SHAFT SIZE	SPEED	WEIGHT
90066	4000 PSI	3.5 GPM	Brass	9.8 / 7.3	24mm / Solid	1750 RPM	17 lbs.
90067	4000 PSI	4.0 GPM	Brass	11.1 / 8.8	24mm / Solid	1750 RPM	17 lbs.
90068	4000 PSI	4.4 GPM	Brass	11.1 / 8.3	24mm / Solid	1750 RPM	17 lbs.




#### THERMAL RELIEF VALVE (TRV)

PART #: 80290  
 RATED TEMP: 140° F  
 THREAD CONNECT: 1/4" MNPT  
 PRICE:



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

- HIGHER PRESSURE AT THE NOZZLE
- GREATER IMPACT AND CLEANING PERFORMANCE

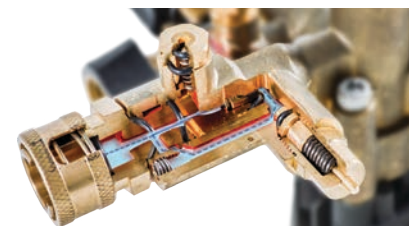

# PROFESSIONAL ENGINES



CRX® single-cylinder professional engines deliver reliable, consistent power for any outdoor application. Engineered for performance and durability, they feature carefully selected components to tackle every job. Trusted by DIYers and pros alike, CRX engines embody innovation and dependability, ensuring your equipment is ready whenever you need it.

## ALL UNITS:

**PTO Shaft Rotation:** Counterclockwise  
**Ignition System:** Transistor magneto  
**Adjustable Throttle:** Yes  
**Low-oil Shutdown:** Standard  
**Lubrication System:** Splash

**Fuel Delivery System:** Carburetor naturally aspirated  
**Evaporative Emissions:** 49-State/EPA-Compliant. Not for sale in the state of California.



## LIMITED WARRANTY

All Units 3-Year Commercial

ENGINE SERIES	CRX® 165*	CRX® 210*	CRX® 225*	CRX® 275*	CRX® 340*
<b>DISPLACEMENT</b>	163cc	208cc	224cc	272cc	338cc
<b>NET POWER</b>	3.2 kW @ 3600 RPM	4.3 kW @ 3600 RPM	4.5 kW @ 3600 RPM	5.8 kW @ 3600 RPM	7.2 kW @ 3600 RPM
<b>NET TORQUE</b>	10 Nm @ 2600 RPM	11.5 Nm @ 2600 RPM	12.5 Nm @ 2800 RPM	15.5 Nm @ 3000 RPM	21 Nm @ 2600 RPM
<b>ALTERNATOR OUTPUT</b>	N/A	N/A	12V 9A – 108W (Optional)	12V 9A – 108W (Optional)	12V 9A – 108W (Optional)
<b>STARTING SYSTEM</b>	Recoil	Recoil	Recoil / Key-start (Optional)	Recoil / Key-start (Optional)	Recoil / Key-start (Optional)
<b>AIR CLEANER</b>	Dual Element	Dual Element	Dual Element	Dual Element	Dual Element
<b>FUEL TANK CAPACITY</b>	0.7 gal.	0.7 gal.	0.7 gal.	0.7 gal.	1.6 gal.
<b>PTO DIAMETER</b>	3/4" (19.05mm)	3/4" (19.05mm)	3/4" (19.05mm)	1" (25.4 mm)	1" (25.4 mm)
<b>PTO FLANGE TYPE</b>	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange B
<b>ENGINE DRY WEIGHT</b>	33 lbs.	33 lbs.	33 lbs.	42 lbs.	70 lbs.
<b>ENGINE OVERALL DIMENSIONS</b>	L 15" x W 13" x H 14"	L 15" x W 13" x H 14"	L 15" x W 13" x H 14"	L 14" x W 16" x H 16"	L 19" x W 17" x H 20"

ENGINE SERIES	CRX® 420*	CRX® 680*	CRX® 750*	CRX® 1000*
<b>DISPLACEMENT</b>	420cc	679cc	750cc	999cc
<b>NET POWER</b>	9 kW @ 3600 RPM	14.5 kW @ 3600 RPM	16 kW @ 3600 RPM	24 kW @ 3600 RPM
<b>NET TORQUE</b>	27 Nm @ 2600 RPM	42.0 Nm @ 2600 RPM	47 Nm @ 3000 RPM	71 Nm @ 2800 RPM
<b>ALTERNATOR OUTPUT</b>	12V 20A – 240W (Optional)	12V 20A – 240W	12V 20A – 240W	12V 20A – 240W
<b>STARTING SYSTEM</b>	Recoil / Key-start (Optional)	Key-start	Key-start	Key-start
<b>AIR CLEANER</b>	Dual Element	Dual Element	Dual Element	Cyclonic
<b>FUEL TANK CAPACITY</b>	1.6 gal.	N/A	N/A	N/A
<b>PTO DIAMETER</b>	1" (25.4 mm)	1" (25.4 mm) 1-1/8" (28.6mm) (Options)	1" (25.4 mm) 1-1/8" (28.6mm) (Options)	1-1/8" (28.6mm) 1-7/16" (36.5mm) (Options)
<b>PTO FLANGE TYPE</b>	SAE J609 Flange B	SAE J609 Flange B/C	SAE J609 Flange B/C	SAE J609 Flange B/C
<b>ENGINE DRY WEIGHT</b>	74 lbs.	96 lbs.	96 lbs.	119 lbs.
<b>ENGINE OVERALL DIMENSIONS</b>	L 17" x W 20" x H 20"	L 20" x W 20" x H 19"	L 20" x W 20" x H 19"	L 23" x W 20" x H 21"



### LOW OIL SHUTDOWN

The Low-oil Shutdown (LOS) feature, an internal oil level sensor, automatically halts the engine when oil levels are insufficient for safe operation, preventing engine damage. This indicates that the oil needs to be refilled, ensuring optimal engine performance.

For more information, please contact your sales representative.



**Delco**<sup>®</sup>

# DUAL WASH PRO SERIES

PATENT PENDING

## COLD WATER

Effortlessly transition between soft washing and pressure washing with a plug-and-play design—no wires, batteries, or electronics needed. Built with chemical-resistant seals and stainless-steel fittings, it offers exceptional durability and corrosion resistance. Streamline your workflow by replacing multiple machines with one versatile solution, delivering optimal cleaning performance while saving water.

### LIMITED WARRANTY

- All Units**
- 10-Year Baseplate
  - 5-Year Pump
  - Lifetime Pump Manifold
  - 3-Year Commercial HONDA® Engine
  - 3-Year CRX® Engine

### FEATURES

- Comet TW-D triplex pump with a stainless steel or nickel-plated manifold and long-life, chemical-resistant HP seals (including SH)
- Stainless-steel fittings and couplers
- Stainless-steel heavy-duty 3-way ball valve for simple cleaning-mode control
- 2:1 gearbox
- Welded anodized aluminum base plate
- Always full flow
- Plug-n-play hookup
- Pressure relief valve
- Thermal relief valve
- Soft wash bypass for remote tank applications

65434



**CRX** POWERED by **HONDA**

MODEL #	PART #	HP PRESSURE	SW PRESSURE	FLOW HP/SW	ENGINE	PUMP / DRIVE	MANIFOLD
DWP3080133ESSM <sup>1</sup>	65434	3000 PSI	300 PSI	8 GPM	CRX® 680* / Key-start	COMET, TW-D / Gear	Stainless Steel
DWP3080133ENPM <sup>1</sup>	65438	3000 PSI	300 PSI	8 GPM	CRX® 680* / Key-start	COMET, TW-D / Gear	Nickel-plated Brass
DWP3080233ESSM <sup>1</sup>	65437	3000 PSI	300 PSI	8 GPM	HONDA® iGX700* Key-start	COMET, TW-D / Gear	Stainless Steel
DWP3080233ENPM <sup>1</sup>	65441	3000 PSI	300 PSI	8 GPM	HONDA® iGX700* Key-start	COMET, TW-D / Gear	Nickel-plated Brass
DWP3010133ESSM <sup>1</sup>	65436	3000 PSI	300 PSI	10 GPM	CRX® 750* / Key-start	COMET, TW-D / Gear	Stainless Steel
DWP3010133ENPM <sup>1</sup>	65440	3000 PSI	300 PSI	10 GPM	CRX® 750* / Key-start	COMET, TW-D / Gear	Nickel-plated Brass
DWP4080133ESSM <sup>1</sup>	65435	4000 PSI	300 PSI	8 GPM	CRX® 750* / Key-start	COMET, TW-D / Gear	Stainless Steel
DWP4080133ENPM <sup>1</sup>	65439	4000 PSI	300 PSI	8 GPM	CRX® 750* / Key-start	COMET, TW-D / Gear	Nickel-plated Brass

### OPTIONAL ACCESSORIES

(sold separately and available upon order)

PART #	DESCRIPTION
80629	Wash Down Gun (8-9 GPM)
80667	Wash Down Gun (10-12 GPM)
80630	50' Soft Wash Hose
80631	100' Soft Wash Hose
80632	200' Soft Wash Hose
80634	8.0 GMP Chemical Injector Kit
80635	10.0 GPM Chemical Injector Kit
80633	Stainless-steel Quick Coupler Kit (Includes socket and plug connections)

### BASEPLATE

#### Aircraft-Grade Aluminum Frame

- Light weight and corrosion-resistant
- Forklift slots
- Rubber vibration dampers

### ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 680	679cc
CRX® 750	750cc
HONDA® iGX700	688cc

### DIMENSIONS & WEIGHTS

All units L 41" x W 27" x H 23" | 254 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

For more information on how to order, please contact your sales representative.

# PATRIOT SERIES

## HOT WATER

The Patriot, designed for versatility, offers both portability and stationary use. It is engineered to deliver a superior clean tailored to your needs. The units are equipped with extended fuel tanks.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, and 40°
- Engine Oil 10W-30

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 3-Year Engine

### FEATURES

- 120V burner system
- 1750 RPM slow speed
- V-twin horizontal engine with key-start (battery not included)
- NEMA 4X electrical enclosure with burner on/off rocker switch and hour meter
- Corrosion-resistant stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw generator with one 120V duplex outlet
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil



65013

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80657	Analog Thermostat Kit
80664	Steam Kit



CRX POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	GAS TANK CAPACITY	DIESEL TANK CAPACITY	PRODUCT WEIGHT
DPT3080251EAC1 <sup>1**</sup>	65013	3000 PSI	8.0 GPM	HONDA® GX690 <sup>*</sup> Key-start	General Pump® / Belt	15 gal.	15 gal.	1050 lbs.
DPT3080151EAC1 <sup>1**</sup>	65148	3000 PSI	8.0 GPM	CRX® 750 <sup>*</sup> Key-start	General Pump® / Belt	15 gal.	15 gal.	1050 lbs.
DPT3080241EAC1 <sup>1**</sup>	65366	3000 PSI	8.0 GPM	HONDA® GX690 <sup>*</sup> Key-start	UDOR® / Belt	15 gal.	15 gal.	1050 lbs.
DPT3080141EAC1 <sup>1**</sup>	65367	3000 PSI	8.0 GPM	CRX® 750 <sup>*</sup> Key-start	UDOR® / Belt	15 gal.	15 gal.	1050 lbs.

### PUMPS

#### General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 750	750cc
HONDA® GX690	688cc

### DIMENSIONS

All Units L 47" x W 43" x H 39"

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\* Battery not included.

# COBALT SERIES

## HOT WATER

Take on the toughest cleaning jobs with the Cobalt series. Built with a robust twin-cylinder engine, it delivers dependable power that gets the job done. When turned on the diesel-fired heating system provides up to 120°F heat rise, helping tackle even the toughest tasks with ease.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Engine Oil 10W-30
- Downstream Injector

### LIMITED WARRANTY

**ALL UNITS** 10-Year Frame, 5-Year Pump, 3-Year Engine

### FEATURES

- 1750 RPM slow speed
- V-twin horizontal engine with key-start (battery not included)
- NEMA 4X electrical enclosure with burner on/off rocker switch and hour meter
- Corrosion-resistant stainless-steel coil cover
- Isolated pump & engine plate with vibration dampeners
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80657	Analog Thermostat Kit
80664	Steam Kit



65002



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DCT3555251EDC1 <sup>1,**</sup>	65002	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	General Pump® / Belt	7.5 gal.	7.5 gal.	650 lbs.
DCT3555151EDC1 <sup>1,**</sup>	65144	3500 PSI	5.5 GPM	CRX® 680* / Key-start	General Pump® / Belt	7.5 gal.	7.5 gal.	650 lbs.
DCT3555241EDC1 <sup>1,**</sup>	65298	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	UDOR® / Belt	7.5 gal.	7.5 gal.	650 lbs.
DCT3555141EDC1 <sup>1,**</sup>	65351	3500 PSI	5.5 GPM	CRX® 680* / Key-start	UDOR® / Belt	7.5 gal.	7.5 gal.	650 lbs.
DCT4050151EDC1 <sup>1,**</sup>	65158	4000 PSI	5.0 GPM	CRX® 680* / Key-start	General Pump® / Belt	7.5 gal.	7.5 gal.	650 lbs.
DCT4050241EDC1 <sup>1,**</sup>	65299	4000 PSI	5.0 GPM	HONDA® GX690* Key-start	UDOR® / Belt	7.5 gal.	7.5 gal.	650 lbs.
DCT4050141EDC1 <sup>1,**</sup>	65352	4000 PSI	5.0 GPM	CRX® 680* / Key-start	UDOR® / Belt	7.5 gal.	7.5 gal.	650 lbs.

### PUMPS

#### General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 680	679cc
HONDA® GX690	688cc

### DIMENSIONS

**All Units** L 46" x W 42" x H 37"

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\* Battery not included.

# VERSA SERIES

## HOT WATER

The Versa series, available in either powder-coated or stainless steel frames, stands as a dependable option for a wide range of cleaning equipment needs. Its superior quality and unique design set this horizontal coil electric cleaning system apart, making it the best in its class.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, and 40°
- Upstream Low-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 1-Year Motor

### FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with burner on/off rocker switch, and hour meter, time delay-shut off
- Large capacity diesel fuel tank
- Horizontal heat exchanger with stainless steel housing
- 120V or 230V burner
- Burner fuels: No. 1/No. 2 diesel or kerosene

### OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7110785	Auto Start/Stop Shut Off



65375



MODEL #	PART #	DESCRIPTION	PRESSURE	FLOW	MOTOR	PUMP / DRIVE	DIESEL TANK	PRODUCT WEIGHT
DVST2.525041AAC1	65381	Super Steamer	250 PSI	2.5 GPM	0.75HP / 120V / 1Ø / 8.4A	UDOR® / Belt	6.7 gal.	610 lbs.
DV2040041BAC2	65375	High-Pressure	2000 PSI	4.0 GPM	5HP / 230V / 1Ø / 23A	UDOR® / Belt	6.7 gal.	610 lbs.
DV3040041BAC2	65377	High-Pressure	3000 PSI	4.0 GPM	7.5HP / 230V / 1Ø / 31A	UDOR® / Belt	6.7 gal.	610 lbs.
DV3040041CAC2	65378	High-Pressure	3000 PSI	4.0 GPM	7.5HP / 230V / 3Ø / 19A	UDOR® / Belt	6.7 gal.	610 lbs.

### STAINLESS STEEL

DVSTSS2.525041AAC1	65382	Super Steamer	250 PSI	2.5 GPM	0.75HP / 120V / 1Ø / 8.4A	UDOR® / Belt	6.7 gal.	610 lbs.
DVSS2040041BAC2	65376	High-Pressure	2000 PSI	4.0 GPM	5HP / 230V / 1Ø / 23A	UDOR® / Belt	6.7 gal.	610 lbs.
DVSS3040041BAC2	65379	High-Pressure	3000 PSI	4.0 GPM	7.5HP / 230V / 1Ø / 31A	UDOR® / Belt	6.7 gal.	610 lbs.
DVSS3040041CAC2	65380	High-Pressure	3000 PSI	4.0 GPM	7.5HP / 230V / 3Ø / 19A	UDOR® / Belt	6.7 gal.	610 lbs.

### PUMP

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated frame and panels for corrosion resistance (65381, 65375, 65377, 65378)
- Stainless steel frame and panels (65382, 65376, 65379, 65380)

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### WHEELS

- 13" Premium pneumatic

### DIMENSIONS

All Units L 35" x W 30" x H 43"

# STREAMLINER SERIES

## HOT WATER

This potent mobile washing system is ingeniously designed to be compact, allowing it to comfortably fit within the confines of a transit van or truck bed, and effortlessly pass through a 36" doorway.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, and 40°
- Engine Oil 10W-30
- Downstream Injector

### LIMITED WARRANTY

**All Units** 10-Year Frame, 5-Year Pump, 3-Year Engine

### FEATURES

- 1750 RPM slow speed
- CRX®, HONDA® key-start engines (battery not included)
- Burner on/off rocker switch and hour meter
- High-temperature safety switch
- Isolated pump and engine plate with vibration dampeners
- 3.4 kW generator with two 120V outlets
- 120V burner system
- Wheel brake system
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" schedule 80 horizontal coil
- Large-capacity fuel tank

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
80657	Analog Thermostat Kit
80646	Steam Kit



65016



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DSL4040253EDC1 <sup>1**</sup>	65016	4000 PSI	4.0 GPM	HONDA® GX390* Key-start	General Pump® / Gear	5.0 gal.	10.0 gal.	450 lbs.
DSL4040242EDC1 <sup>1**</sup>	65361	4000 PSI	4.0 GPM	HONDA® GX390* Key-start	UDOR® / Direct	5.0 gal.	10.0 gal.	450 lbs.
DSL4040142EDC1 <sup>1**</sup>	65363	4000 PSI	4.0 GPM	CRX® 420* / Key-start	UDOR® / Direct	5.0 gal.	10.0 gal.	450 lbs.
DSL4040143EDC1 <sup>1**</sup>	65364	4000 PSI	4.0 GPM	CRX® 420* / Key-start	UDOR® / Gear	5.0 gal.	10.0 gal.	450 lbs.

### PUMPS

#### General Pump® Industrial Triplex

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 420	420cc
HONDA® GX390	389cc

### DIMENSIONS

All Units L 50" x W 32" x H 47"

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

\*\* Battery not included.

# ELIMINATOR SERIES

## HOT WATER

The Eliminator Series Hot Water Pressure Washer is built for high-demand cleaning environments where reliability, power, and safety are essential. Engineered with a rugged slow-speed system and a fully enclosed, roll-down locking cabinet, the Eliminator delivers professional-grade cleaning performance while protecting internal components from weather, debris, and damage.

Designed for facilities, shops, industrial plants, and commercial operations, this unit combines hot-water efficiency with advanced controls—including time-delay shutdown, soap metering, and remote operation readiness—making it one of the most versatile stationary cleaning systems available.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, and 40°
- High-Pressure Soap Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 1-Year Motor

### FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- High-pressure soap with metering valve
- Roll-down doors with lock
- Slide out motor pump tray
- Time delay shut-down
- Remote box ready-wired
- Float tank
- 1/2" schedule 80 vertical coil

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
7100283	Draft Diverter
7110785	Auto Start/Stop Shut-Off
7110510	Wired NEMA 4X Remote Operating Station



65050

**Limited Stock Available**



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU	PUMP / DRIVE	FUEL TYPE	PRODUCT WEIGHT
DNG3080031C	65048	3000 PSI	8.0 GPM	15HP / 230V / 3Ø / 35A	380,000	UDOR® / Belt	Natural Gas	800 lbs.
DNG3080031D	65049	3000 PSI	8.0 GPM	15HP / 460V / 3Ø / 17.5A	380,000	UDOR® / Belt	Natural Gas	760 lbs.
DLP3080031C	65050	3000 PSI	8.0 GPM	15HP / 230V / 3Ø / 35A	450,000	UDOR® / Belt	Liquid Propane	814 lbs.
DLP3080031D	65051	3000 PSI	8.0 GPM	15HP / 460V / 3Ø / 17.5A	450,000	UDOR® / Belt	Liquid Propane	820 lbs.

### PUMPS

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Powder-coated for corrosion resistance
- Corrosion-resistant, stainless steel vented panels
- Wall-mount

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### DIMENSIONS

65048, 65049, 65050, 65051 L 30" x W 50" x H 53"

# ELIMINATOR SERIES CONTINUED

## UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, and 40°
- High-Pressure Soap Injector

## LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 1-Year Motor

## FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- High-pressure soap with metering valve
- Roll-down doors with lock
- Time delay shut-down
- Remote box ready-wired
- Float tank
- 1/2" schedule 80 vertical coil
- Voltage selection (65184 only)  
Choose between 208V or 230V



65184

## OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION
7100283	Draft Diverter
7110785	Auto Start/Stop Shut-Off
80654	Remote Box Kit 24V



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU	PUMP / DRIVE	FUEL TYPE	PRODUCT WEIGHT
ELM3040041BNG	65184	3000 PSI	4.0 GPM	7.5HP / 208/230V / 1Ø / 29A	380,000	UDOR® / Belt	Natural Gas	860 lbs.
ELM3050041CNG	65190	3000 PSI	5.0 GPM	10HP / 230V / 3Ø / 25A	380,000	UDOR® / Belt	Natural Gas	860 lbs.
ELM3050041DNG	65191	3000 PSI	5.0 GPM	10HP / 460V / 3Ø / 12.5A	380,000	UDOR® / Belt	Natural Gas	860 lbs.

## ELIMINATOR XL

ELM3080041CNG	65246	3000 PSI	8.0 GPM	15HP / 230V / 3Ø / 36A	750,000	UDOR® / Belt	Natural Gas	1660 lbs.
ELM3080041DNG	65247	3000 PSI	8.0 GPM	15HP / 460V / 3Ø / 18A	750,000	UDOR® / Belt	Natural Gas	1660 lbs.
ELM3080041DLP	65286	3000 PSI	8.0 GPM	15HP / 460V / 3Ø / 18A	760,000	UDOR® / Belt	Liquid Propane	1660 lbs.
ELM3010041DNG	65283	3000 PSI	10.0 GPM	20HP / 460V / 3Ø / 24A	750,000	UDOR® / Belt	Natural Gas	1660 lbs.

## PUMPS

### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

## FRAME

- Powder-coated for corrosion resistance
- Corrosion-resistant, stainless steel vented panels
- Wall-mount

## HOSE

- 3/8" x 50' steel-braided Armor Hose®

## DIMENSIONS

65184, 65190, 65191	L 52" x W 36" x H 51"
65246, 65247, 65286, 65283	L 64" x W 36" x H 61"



Water Inlet/Outlet

NOTE: Movable water inlet/outlet point  
(3 different locations - front, side, or back)

# EQUALIZER SERIES

## HOT WATER

The Equalizer series, offered in both gas and electric models, is designed to accommodate a diverse range of cleaning applications. This comprehensive vertical coil pressure washing system boasts a broad four-wheel stance, enhancing both mobility and versatility, making it a standout choice for your cleaning needs.

### UNIT INCLUDES

- Hose
- Trigger Gun
- Lance
- Nozzles: 15°, 25°, and 40°

### LIMITED WARRANTY

**All Units** 10-Year Frame, 5-Year Pump, 3-Year Engine

### FEATURES

- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- External diesel fuel tank (4.4 gal.)
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" schedule 80 vertical coil

### OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7112623	Chemical Injector Kit



65068



POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	PRODUCT WEIGHT
DEZ3040252EDC1 <sup>1</sup>	65069	3000 PSI	4.0 GPM	HONDA® GX390* Recoil / Key-start	General Pump / Direct	515 lbs.
DEZ3040242EDC1 <sup>1</sup>	65373	3000 PSI	4.0 GPM	HONDA® GX390* Recoil / Key-start	UDOR® / Direct	515 lbs.
DEZ4040142EDC1 <sup>1</sup>	65374	4000 PSI	4.0 GPM	CRX420* / Key-start	UDOR® / Direct	515 lbs.

### PUMPS

#### General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- 13" premium heavy-duty tires for easy mobility and vibration dampening

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	1.6 gal
HONDA® GX390	389cc	1.6 gal

### DIMENSIONS

All Units L 35" x W 30" x H 43"

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.

# DOMINATOR SERIES

## HOT WATER

The Dominator Series, designed with compactness and user-friendliness in mind, is a testament to high-quality components and remarkable value. This horizontal coil electric hot water pressure washer comes equipped with features like downstream chemical injection, enhancing its functionality and efficiency.

### UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Downstream Injector
- Trigger Gun

### LIMITED WARRANTY

**All Units** 10-Year Frame, 5-Year Pump, 1-Year Motor

### FEATURES

- NEMA 4X electrical enclosure with rocker switch and hour meter
- 6.7 gal diesel fuel tank
- Wheel brake system
- 35' GFCI electrical cord
- Burner fuels: No. 1/No. 2 diesel or kerosene



65383



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP	DIESEL TANK	PRODUCT WEIGHT
DDM1030042AAC1	65383	1000 PSI	3.0 GPM	2HP / 120V / 1Ø / 16.4A	UDOR® / Direct	6.7 gal.	410 lbs.
DDM2040042BAC2	65384	2000 PSI	4.0 GPM	5HP / 230V / 1Ø / 23A	UDOR® / Direct	6.7 gal.	410 lbs.

### PUMP

#### UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### DIMENSIONS

**All Units** L 55" x W 31" x H 40"

# CWE SERIES

## COLD WATER

The Delco® CWE Portable Series represents electrically-powered, enclosed cabinet-style cold water washers. Each model is equipped with a belt-drive premium triplex plunger pump, featuring high-temperature seals capable of handling water temperatures up to 165° F. This series combines compact design and user-friendly operation, making it an excellent choice for your cleaning needs.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles: 15°, 25°, 40°, and Soap
- Downstream Injector

### LIMITED WARRANTY

All Units 10-Year Frame, 5-Year Pump, 1-Year Motor

### FEATURES

- High-temperature water feed, capable up to 165° F
- Automatic start/stop feature
- Built-in hour meter
- Belt driven slow speed industrial triplex pump
- Removable handle and wheels
- Wall mount bracket (standard with 65171 only)

### OPTIONAL ACCESSORIES (sold separately & available upon order)

PART #	DESCRIPTION	PART #	DESCRIPTION
80650	Remote Box (Small Frame)	80297	Wall Mount Kit (Small Frame)
80655	Remote Box (Large Frame)	80653	Wall Mount Kit (Large Frame)



65292



65171



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP / DRIVE	FRAME / MATERIAL	PRODUCT WEIGHT
---------	--------	----------	------	-------	--------------	------------------	----------------

### WALL MOUNT

DWM1330042B	65171	1300 PSI	3.0 GPM	3HP / 230V / 1Ø / 13.2A	UDOR® / Direct	Small Wall Mount / Steel	250 lbs.
DWM2040042B	65172	2000 PSI	4.0 GPM	5HP / 230V / 1Ø / 23A	UDOR® / Direct	Small Wall Mount / Steel	250 lbs.
DWM3540041B	65455	3500 PSI	4.0 GPM	10HP / 230V / 1Ø / 38A	UDOR® / Belt	Large Wall Mount / Steel	350 lbs.

### FLOOR MODEL

DFM2040041B	65295	2000 PSI	4.0 GPM	5HP / 230V / 1Ø / 23A	UDOR® / Belt	Large Portable / Steel	350 lbs.
DFM2010031C	65164	2000 PSI	10.0 GPM	15HP / 230V / 3Ø / 35A	COMET / Belt	Large Portable / Steel	350 lbs.
DFM3040041D	65294	3000 PSI	4.0 GPM	7.5HP / 460V / 3Ø / 9.5A	UDOR® / Belt	Large Portable / Steel	350 lbs.
DFMSS3040041D	65296	3000 PSI	4.0 GPM	7.5HP / 460V / 3Ø / 9.5A	UDOR® / Belt	Large Portable / Stainless Steel	350 lbs.
DFM3050041C	65292	3000 PSI	5.0 GPM	10HP / 230V / 3Ø / 25A	UDOR® / Belt	Large Portable / Stainless Steel	350 lbs.
DFMSS3050041C	65293	3000 PSI	5.0 GPM	10HP / 230V / 3Ø / 25A	UDOR® / Belt	Large Portable / Stainless Steel	350 lbs.

### PUMPS

#### COMET Industrial Triplex Pump

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

### FRAMES

#### Wall Mount

- Powder-coated steel frame for corrosion resistance

#### Portable

- Compact frame for easy storage
- Powder-coated steel frame for corrosion resistance

### HOSE

- 3/8" x 50' steel-braided Armor Hose®

### COVER

- Steel powder-coated panel cover

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### DIMENSIONS

65171, 65172	L 32" x W 16" x H 14"
65455	L 33" x W 22" x H 18"
65164, 65294, 65296, 65292, 65293	L 43" x W 30" x H 39"

# MOBILE TRAILER SERIES

## HOT WATER

The Delco® Mobile Trailer Series delivers powerful hot-water cleaning in a fully mobile platform. Engineered to operate in areas with limited water access, these trailers provide dependable cleaning performance on job sites where resources are scarce.

### UNIT INCLUDES

- Hose
- Lance
- Trigger Gun
- Nozzles 15°, 25°, 40°, and Soap
- Downstream Injector

### LIMITED WARRANTY

**ALL UNITS** 1-Year Trailer Frame, 5-Year Pump, 3-Year Engine

### FEATURES

- 1750 RPM slow speed
- (1) 200' high-pressure hose reel with 100' high-pressure hose
- (1) 200' supply hose reel with 90' supply hose
- Translucent polyethylene water supply tank with easy-to-read water level indicators
- Electric brake system
- Burner fuels: No. 1/No. 2 diesel or kerosene



95101



POWERED by HONDA



MODEL #	PART#	PRESSURE	FLOW	ENGINE	PUMP / DRIVE	AXLE RATING	WATER TANK SIZE	TIRE	BURNER TYPE
---------	-------	----------	------	--------	--------------	-------------	-----------------	------	-------------

### STAGE 2 TRAILERS

<b>DTRS23555251EDC1<sup>1</sup></b>	95161	3500 PSI	5.5 GPM	HONDA® GX690* Recoil / Key-start	General Pump® / Belt	3500 lbs. (1)	225 gal.	ST205/75R14	12VDC
<b>DTRS23555141EDC1<sup>1</sup></b>	95180	3500 PSI	5.5 GPM	CRX® 680" Recoil / Key-start	UDOR® / Belt	3500 lbs. (1)	225 gal.	ST205/75R14	12VDC
<b>DTRS24050251EDC1<sup>1</sup></b>	95163	4000 PSI	5.0 GPM	HONDA® GX690* Recoil / Key-start	General Pump® / Belt	3500 lbs. (1)	225 gal.	ST205/75R14	12VDC

### STAGE 3 TRAILERS

<b>DTRS33080241EAC1<sup>1</sup></b>	95177	3000 PSI	8.0 GPM	HONDA® GX690* Recoil / Key-start	UDOR® / Belt	5200 lbs. (2)	525 gal.	ST225/75R15	120VAC
<b>DTRS33080141EAC1<sup>1</sup></b>	95181	3000 PSI	8.0 GPM	CRX® 750" Recoil / Key-start	UDOR® / Belt	5200 lbs. (2)	525 gal.	ST225/71R15	120VAC
<b>DTRS33555141EAC1<sup>1</sup></b>	95182	3500 PSI	5.5 GPM	CRX® 680" Recoil / Key-start	UDOR® / Belt	5200 lbs. (2)	525 gal.	ST225/75R15	120VAC
<b>DTRS33555251EDC1<sup>1</sup></b>	95176	3500 PSI	5.5 GPM	HONDA® GX690* Recoil / Key-start	General Pump® / Belt	5200 lbs. (2)	525 gal.	ST225/71R15	12VDC
<b>DTRS33555241EAC1<sup>1</sup></b>	95178	3500 PSI	5.5 GPM	HONDA® GX690* Recoil / Key-start	UDOR® / Belt	5200 lbs. (2)	525 gal.	ST225/75R15	120VAC

### PUMPS

#### General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

#### UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

### HOSES

- 3/8" x 100' steel-braided Armor Hose®

#### High-Pressure Hose Reel

- Size: 200'

#### Supply Hose

- Size: 5/8" x 90'

#### Supply Hose Reel

- Standard - 200'

### NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

### ADDITIONAL SPECS

**Trailer Frame:** 6" powder coated C-channel

**Lighting:** LED

**Trailer Hitch Ball Size:**

2" ball coupling (Stage 2), 2-5/16" ball coupling (Stage 3)

### ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
HONDA® GX690	688cc

### DIMENSIONS & WEIGHT

<b>95161, 95163, 95180</b>	L 156" (includes tongue) x W 68" x H 62" 1500 lbs.
<b>95176, 95177, 95178, 95181, 95182</b>	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.

<sup>1</sup> This product is 49-State/EPA-Compliant. Not for sale in the state of California.

\* Indicates engine is equipped with low-oil shutdown technology. Refer to page 39 for additional information.



Driven by **PERFORMANCE™**



SIMPSONOPE



SIMPSONPRESSUREWASHERS



SIMPSON CLEANING



SIMPSONCLEANING.COM



SIMPSONORDERS@FNA-GROUP.COM



DELCO-CLEANING.COM



SALES@DELCO-CLEANING.COM



**Disclaimer of Liability:** In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog also reserves the right to make changes to its product line at any time without notice. If misleading, or otherwise inaccurate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-833-362-7368 with any concerns.

**SIMPSONCLEANING.COM • SIMPSONORDERS@FNA-GROUP.COM**  
**DELCO-CLEANING.COM • SALES@DELCO-CLEANING.COM**